


Tag:
Series : TH500

METAL*AIRE®
Submittal No: TH500-SA-HW

**Single Duct Air Terminal With Integral
Sound Attenuator and Hot Water Coil**

Models: TH506 6" Inlet
TH508 8" Inlet
TH510 10" Inlet
TH512 12" Inlet
TH514 14" Inlet
TH516 16" Inlet

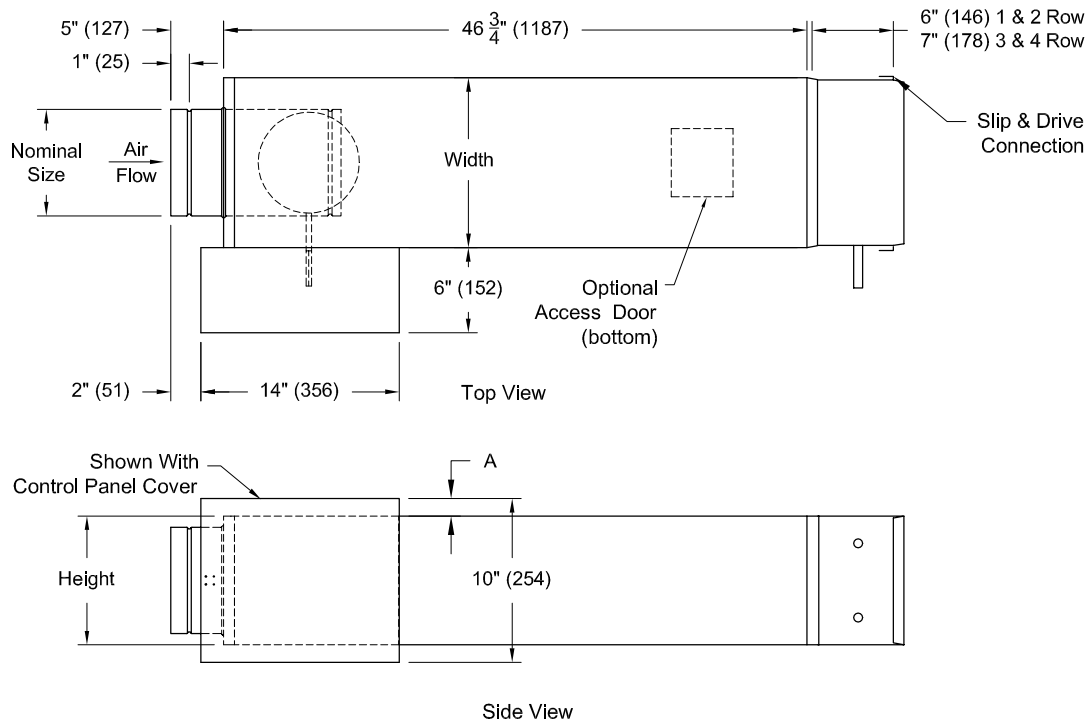

UNITS are manufactured with 20GA (1.0mm) Galvanized Steel Inlet Valve Assembly.

INSULATION: ☐ 1.5#/FT³ (24 Kg/m³) Dual Density, (4# Skin) (64 Kg/m³) Coated Fiberglass, All Exposed Edges Sealed

☐ 3#/FT³ (48 Kg/m³) Reinforced Foil Covered, Fiberglass. No Exposed Edges.

☐ Engineered Polymer Closed Cell Foam (No Fiberglass)

All Insulations Meet NFPA 90A and UL 181 for Erosion, Mold Growth, and 25/50 Flame Spread/Smoke Density Ratings, All Insulations are 1/2"

Model Number	Nominal Size In. (mm)	Height In. (mm)	Width In. (mm)	Dim. A In. (mm)	Unit Weight with			
					1R HW Coil	2R HW Coil	3R HW Coil	4R HW Coil
TH506	6 Dia. (152)	8 (203)	12 (305)	2 (51)	29 lbs (13 kg)	30 lbs (14 kg)	33 lbs (15 kg)	35 lbs (16 kg)
TH508	8 Dia. (203)	10 (254)	12 (305)	1 (25)	33 lbs (15 kg)	35 lbs (16 kg)	39 lbs (18 kg)	41 lbs (19 kg)
TH510	10 Dia. (254)	12 1/2 (318)	14 (356)	-	40 lbs (18 kg)	43 lbs (20 kg)	48 lbs (22 kg)	51 lbs (23 kg)
TH512	12 Dia. (305)	15 (381)	16 (406)	-	43 lbs (20 kg)	48 lbs (22 kg)	51 lbs (23 kg)	56 lbs (26 kg)
TH514	14 Dia. (356)	17 1/2 (445)	20 (508)	-	48 lbs (22 kg)	51 lbs (23 kg)	56 lbs (26 kg)	60 lbs (27 kg)
TH516	16 Dia. (406)	18 (457)	24 (610)	-	51 lbs (23 kg)	56 lbs (26 kg)	60 lbs (27 kg)	68 lbs (30 kg)

Notes: (☐ check if provided)

1. Available Finishes	2. Construction Details	3. Construction Details (cont.)
<input type="checkbox"/> Reinforced foil covered fiberglass, no exposed edges, <input type="checkbox"/> Engineered polymer closed cell form <input type="checkbox"/> Metal line <input type="checkbox"/> Control panel covered <input type="checkbox"/> Flanged discharge	<ul style="list-style-type: none">Units are manufactured with 22-gauge casing and 20-gauge inlet valve assembly,All insulations meet NFPA 90A and UL 181,Standard insulation dual density, coated fiberglass, all exposed edges sealed,Slip and drive connections discharge standard	<ul style="list-style-type: none">All insulation 1/2" (12.7 mm)

Submittal No. TH500-SA-HW

Date: 02/16/2004

Dimensions are in inches

Page: 1 of 1