



Tag:
Series : **2100**

M E T A L* A I R E®
Submittal No: **2100**



Linear Bar Grilles / Registers - 1/2" Border
Extruded Aluminum - 7/32" Bars - 1/2" Center

Models: 2100	2115	2130	Wall Mounting - 0°/15°/30° Deflection
2100H	2115H	2130H	Concealed Mounting Hanger - 0°/15°/30° Deflection
2100HP	2115HP	2130HP	Concealed Spline Subframe - 0°/15°/30° Deflection
2100HW	2115HW	2130HW	Narrow Subframe - 0°/15°/30° Deflection
2100HC	2115HC	2130HC	Combination Subframe - 0°/15°/30° Deflection



Models: 2100, 2115, 2130 (Wall Mounting)

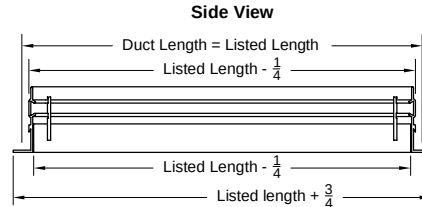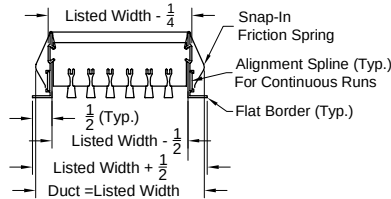



Models: 2100 H, 2115 H, 2130 H (Concealed Mounting Hanger)

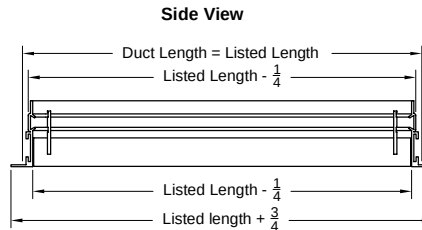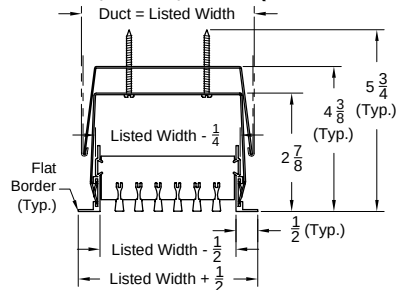



Models: 2100HP, 2115HP, 2130HP (Concealed Spline Subframe)

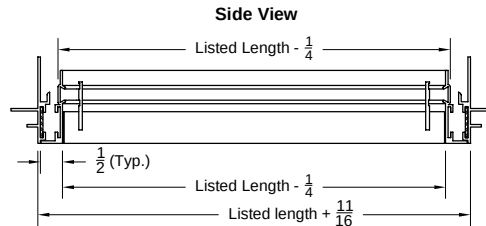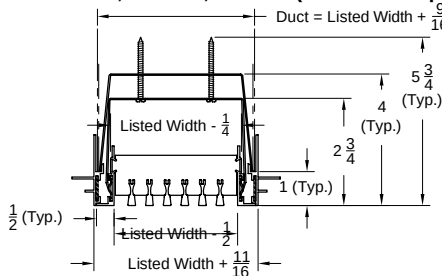

Models: 2100 HW, 2115 HW, 2130 HW (Narrow Subframe)

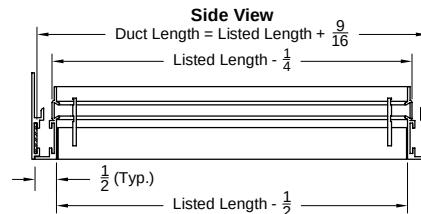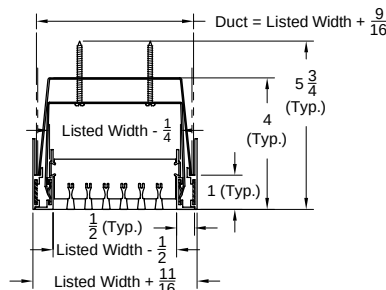

Models: 2100 HC, 2115 HC, 2130 HC (Combination Subframe)

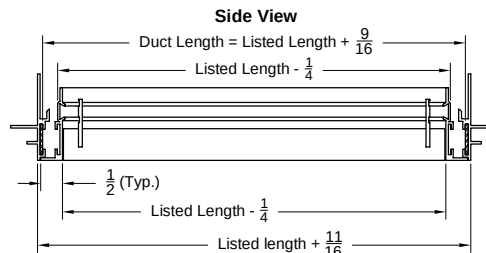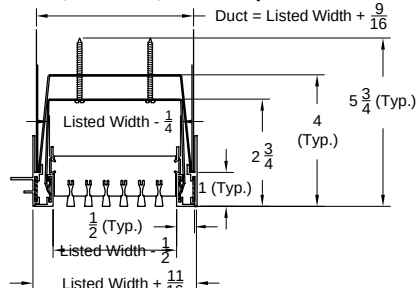

Note: For Air Deflection Patterns and Face View see Page 2



Dimensions are in inches

Tag:
Series : 2100


METAL*AIRE®
Submittal No: 2100

**Linear Bar Grilles / Registers - 1/2" Border
Extruded Aluminum - 7/32" Bars - 1/2" Center**


Options: 0°, 15° or 30° Deflection For All Models
OBDE Opposed Blade Damper
Mitered Corners For All Models

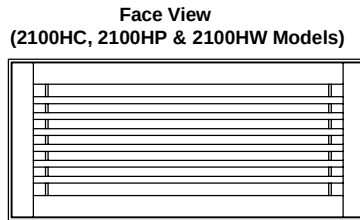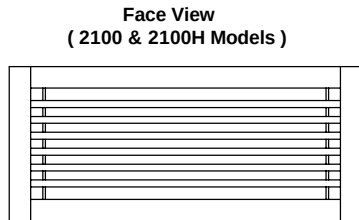


Option: 0°, 15° or 30° Deflection

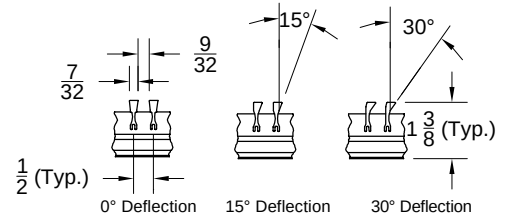


Option: 2100D, 2115D, 2130D
(With Damper)

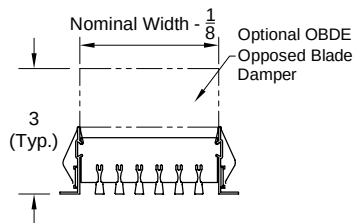


Option: 2100 HD, 2115 HD, 2130 HD
(With Damper)

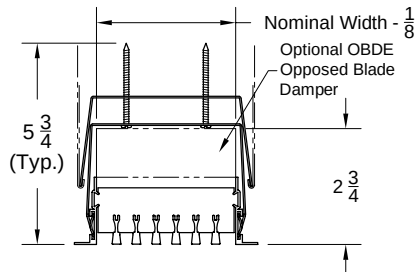


Option: 2100 HPD, 2115 HPD, 2130 HPD
(With Damper)

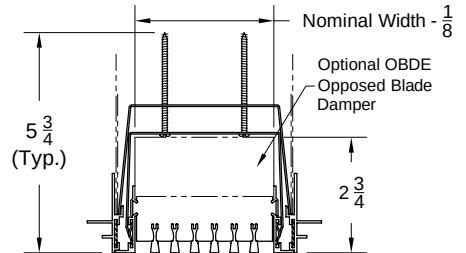


Option: 2100 HWD, 2115 HWD, 2130 HWD
(With Damper)

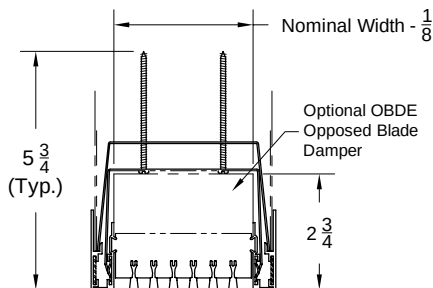

Option: 2100 HCD, 2115 HCD, 2130 HCD
(With Damper)

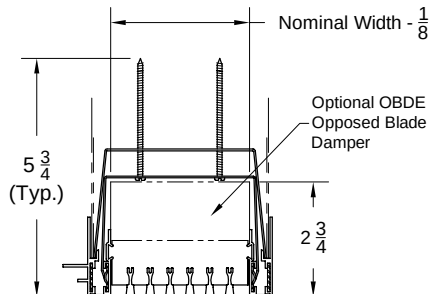

Option: Mitered Corner

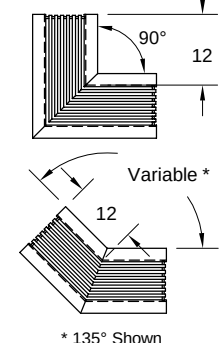

1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
Standard Finish: ☐ 01 White. Optional Finish (extra charge) ☐ 04 Clear Anodized.	☐ L9 Equalizing Grid ☐ Mitered Corners ☐ Dampers	☐ Dampers: Widths 3 1/2" and smaller use a single flap style damper. ☐ Widths 4" and larger use Model OBDE Damper. ☐ Cores Only (Longer sections are not available for Core Only sections).	• Widths available in 1/2" increments from 1 1/2" to 24". • Lengths available in single pieces up to 72". • Longer sections are made by joining sections in the field with factory supplied alignment strip. • For lengths less than 72", round up to next listed size. No odd size charges apply. • Standard mounting in concealed friction spring clips. • Available Reverse Sizes (face bars parallel to the short side).

Notes: (☐ check if provided)

Dimensions are in inches

Submittal Number 2100