



Tag:
Series : 2300

METAL*AIRE®
Submittal No: 2300



Linear Bar Grilles / Registers - 1" Border
Extruded Aluminum - 1/8" Bars - 1/4" Center

Models: 2300 2315 2330 Wall Mounting - 0°/15°/30° Deflection
2300H 2315H 2330H Concealed Mounting Hangers - 0°/15°/30° Deflection
2300HP 2315HP 2330HP Concealed Spline Mounting Frame - 0°/15°/30° Deflection



Models: 2300, 2315, 2330 (Wall Mounting - 0° / 15° / 30 %5d Deflection)

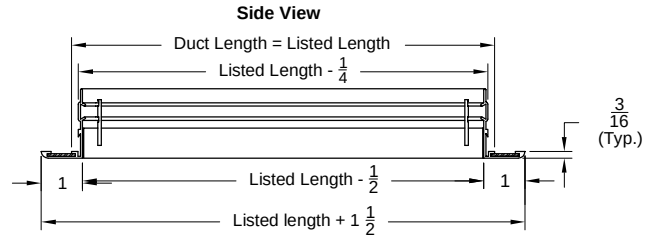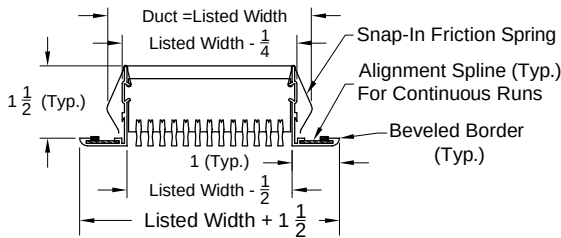


Models: 2300H, 2315H, 2330H (Concealed Mounting Hangers - 0° / 15° / 30° Deflection)

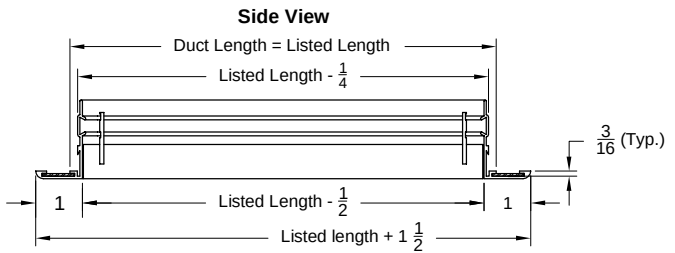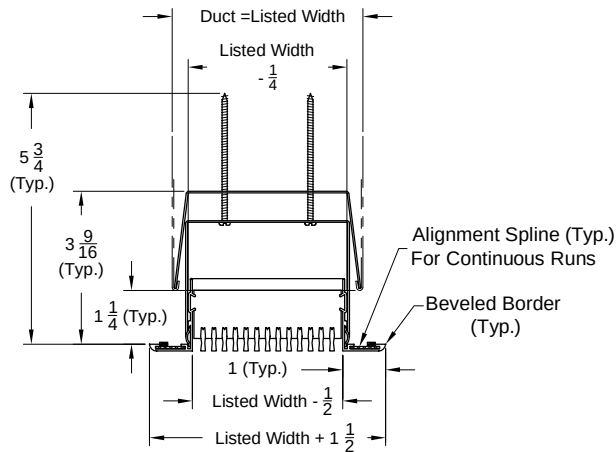

Models: 2300HP, 2315HP, 2330HP (Concealed Spline Mounting Frame - 0° / 15° / 30° Deflection)

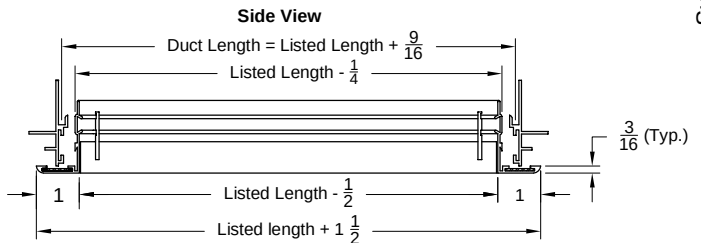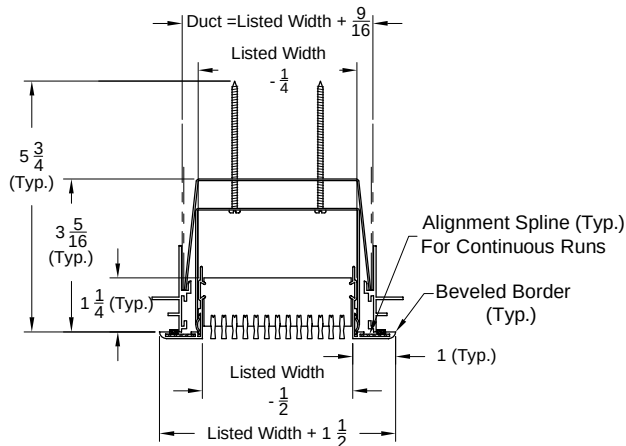

Face View (all models)

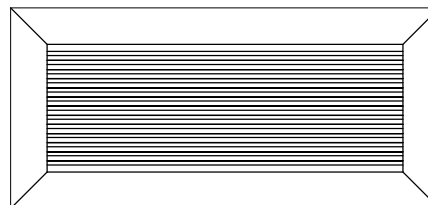

Models Available						
Grilles			Registers			Deflection
2300	2300 H	2300 HP	2300D	2300 HD	2300 HPD	0°
2315	2315 H	2315 HP	2315D	2315 HD	2315 HPD	15°
2330	2330 H	2330 HP	2330D	2330 HD	2330 HPD	30°

Dimensions are in inches

Tag:
Series : 2300


METAL*AIRE®
Submittal No: 2300

**Linear Bar Grilles / Registers - 1" Border
Extruded Aluminum - 1/8" Bars - 1/4" Center**


Options: 0°, 15° or 30° Deflection
OBDE
MC

For All Models
Opposed Blade Damper
Mitered Corner For All Models


Options: 0°, 15° or 30° Deflection

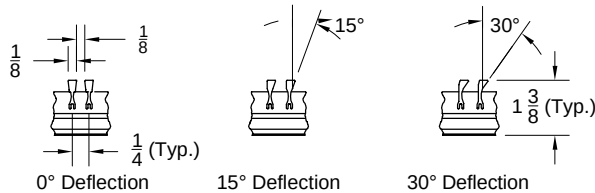


Optionss: 2300D, 2315D, 2330D (Register - 0° / 15° / 30° Deflection)
(Wall Mounted - With OBDE Damper)

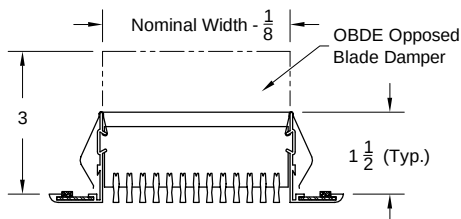


Optionss: 2300HD, 2315HD, 2330HD (Register - 0° / 15° / 30° Deflection)
(Concealed Mounting Hangers - With OBDE Damper)

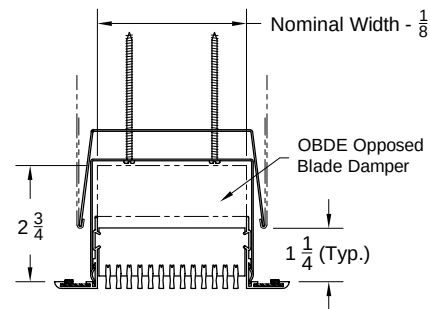

Optionss: 2300HPD, 2315HPD, 2330HPD (Register - 0° / 15° / 30° Deflection)
(Concealed Spline Mounting Frame - With OBDE Damper)

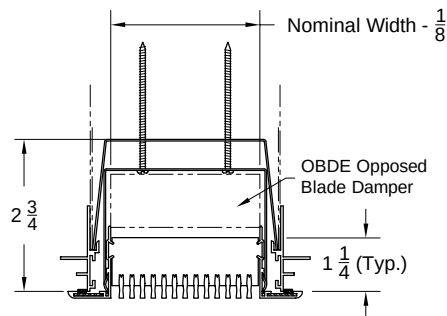

Options: Mitered Corners

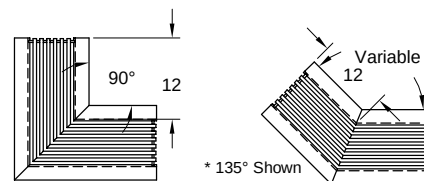

1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
Standard Finish: ☐ 01 White. Optional Finish (extra charge) ☐ 04 Clear Anodized.	☐ L9 Equalizing Grid. ☐ Mitered Corner. ☐ Damper (For Grille).	☐ Dampers: Widths 3 1/2" and smaller use a single flap style damper. ☐ Widths 4" and larger use Model OBDE Damper. ☐ Core Only.	• Widths available in 1/2" increments from 1 1/2" to 24". • Lengths available in single pieces up to 72". • Longer sections are made by joining sections in the field with factory supplied alignment strip. • Standard mounting in concealed friction spring clips. • Available Reverse Sizes (face bars parallel to the short side).

Notes: (☐ check if provided)

Dimensions are in inches

Cad File Number: 2300-p2-55

Date: 03/25/2003

Submittal No. 2300

Page: 2 of 2