

Tag:
Series : 6600



METAL*AIRE®
Submittal No: 6600-1

Adjustable Linear Slot Diffuser - Extruded Aluminum
Pattern Controller / Damper
Slots: 1/2" (6650), 3/4" (6675) and 1" (6610)

Models: 6600-11-1 Face Screw Mounting - 1 1/8" Border - No Hardware
6600-12-1 Concealed Surface Mount - 1 1/8" Border - With Hardware



☐ **Models: 6600-11-1 (Face Screw Mounting**
- 1 1/8" Border - No Hardware)

☐ **Model: 6600-12-1 (Concealed Surface Mount**
- 1 1/8" Border - With Hardware)

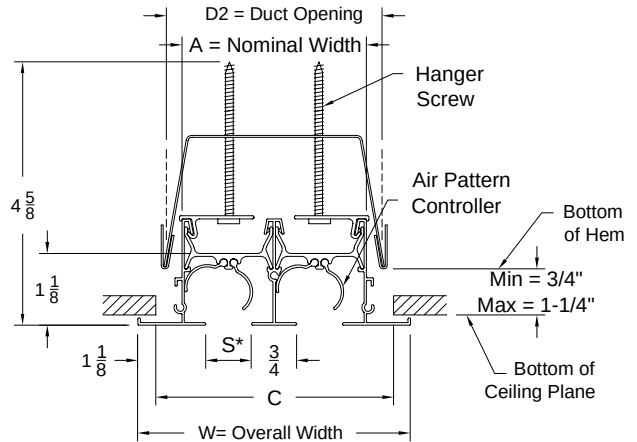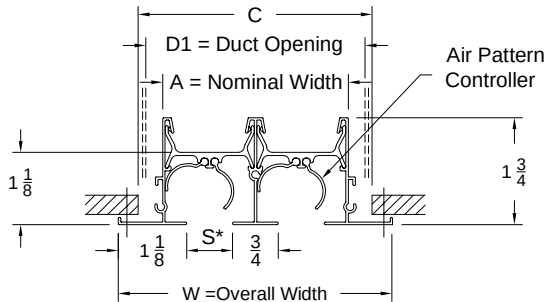

Note: For the 6600-12-1, the BP/BPI plenum must be installed with 3/4" minimum/ 1-1/4" maximum opening between the bottom of the ceiling plane and the bottom of the hem of the BP/BPI plenum

☐ **End Border**

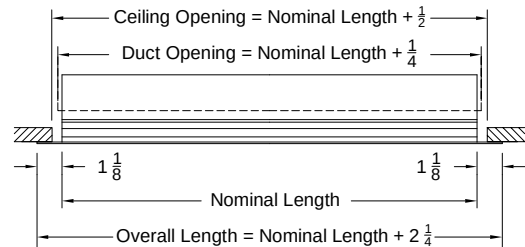


* For Slot Sizes Available See Tables

Model 6650 (6650-11-1 & 6650-12-1)								
S=1/2" Slot	No. of Air Slots							
	1	2	3	4	5	6	7	8
A	1 1/4	2 1/2	3 3/4	5	6 1/4	7 1/2	8 3/4	10
D1	1 5/8	2 7/8	4 1/8	5 3/8	6 5/8	7 7/8	9 1/8	10 3/8
D2	1 7/8	3 1/8	4 3/8	5 5/8	6 7/8	8 1/8	9 3/8	10 5/8
C	2	3 1/4	4 1/2	5 3/4	7	8 1/4	9 1/2	10 3/4
W	2 3/4	4	5 1/4	6 1/2	7 3/4	9	10 1/4	11 1/2

Model 6675 (6675-11-1 & 6675-12-1)								
S=3/4" Slot	No. of Air Slots							
	1	2	3	4	5	6	7	8
A	1 1/2	3	4 1/2	6	7 1/2	9	10 1/2	12
D1	1 7/8	3 3/8	4 7/8	6 3/8	7 7/8	9 3/8	10 7/8	12 3/8
D2	2 1/8	3 5/8	5 1/8	6 5/8	8 1/8	9 5/8	11 1/8	12 5/8
C	2 1/4	3 3/4	5 1/4	6 3/4	8 1/4	9 3/4	11 1/4	12 3/4
W	3	4 1/2	6	7 1/2	9	10 1/2	12	13 1/2

Model 6610 (6610-11-1 & 6610-12-1)								
S=1" Slot	No. of Air Slots							
	1	2	3	4	5	6	7	8
A	1 3/4	3 1/2	5 1/4	7	8 3/4	10 1/2	12 1/4	14
D1	2 1/8	3 7/8	5 5/8	7 3/8	9 1/8	10 7/8	12 5/8	14 3/8
D2	2 3/8	4 1/8	5 7/8	7 5/8	9 3/8	11 1/8	12 7/8	14 5/8
C	2 1/2	4 1/4	6	7 3/4	9 1/2	11 1/4	13	14 3/4
W	3 1/4	5	6 3/4	8 1/2	10 1/4	12	13 3/4	15 1/2

Air Deflection Patterns



1. Available Finishes	2. Available Accessories	3. Construction Details
Standard Finish: ☐ 20 White frame with black pattern controller. Optional Finishes (additional charge): ☐ 21 Clear anodized with black pattern controller	☐ Mitered Corners (45°, 90° and 135°) ☐ Replacement End Caps. ☐ Insulated Boot Plenums. ☐ Non-Insulated Boot Plenums. Note: BP Boot Plenums are shipped separate for field installation.	• Sizes available in only 1-8 slots. • Slot widths available 1/2" (6650), 3/4"(6675) and 1"(6610). • Longest single section is 8 feet. • Continuous lengths are made in sections.

Notes: (☐ check if provided)

Dimensions are in inches

Cad File Number: 6600-11(12)-1

Date: 03/25/2003

Submittal No. 6600-1

Page: 1 of 1