

Tag:


Series : BP

METAL*AIRE®

Submittal No: BP-H

Non Insulated / Insulated Boot Plenums Steel - Hemmed Plenums

Models: BP (BPI)-12-1 Boot Plenum - Non Insulated (Insulated) - Surface Mount - 1 1/8" Border
BP (BPI)-12-6 Boot Plenum - Non Insulated (Insulated) - Lay in T-Bar - 1 1/8" Border
BP (BPI)-22-73 Boot Plenum - Non Insulated (Insulated) - Concealed Spline - 3/4" Border
BP (BPI)-22-74 Boot Plenum - Non Insulated (Insulated) - Concealed Spline - 3/4" Border
BP (BPI)-42-7 Boot Plenum - Non Insulated (Insulated) - Concealed Spline - 25/32" Border

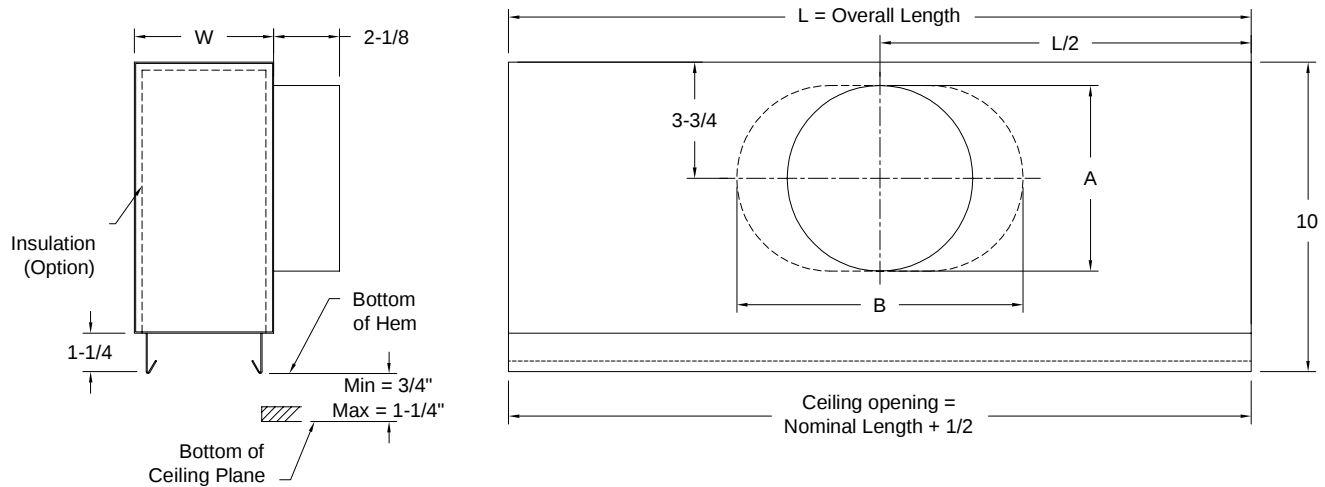

Available Nominal Lengths	24	36	48	60
---------------------------	----	----	----	----

Models	Overall Length (L)
BP (BPI)-12-1	N.L. - 1/16
BP (BPI)-12-6	N.L. - 2 7/16
BP (BPI)-22-73	N.L. - 1 1/4
BP (BPI)-22-74	N.L. - 1 1/4
BP (BPI)-42-7	N.L. - 9/16

Available Inlets	Round Dim.(A)	Oval Dim.(A x B)
6	5-7/8	-
8	-	5-7/8 x 8-15/16
10	-	5-7/8 x 12-1/16
12	-	5-7/8 x 15-1/4
14	-	5-7/8 x 18-7/16

Model 6650 (1/2" slot width)				Model 6675 (3/4" slot width)				Model 6610 (1" slot width)			
Width (W)				Width (W)				Width (W)			
1 Slot	2 Slots	3 Slots	4 Slots	1 Slot	2 Slots	3 Slots	4 Slots	1 Slot	2 Slots	3 Slots	4 Slots
2-5/8	3-7/8	5-1/8	6-3/8	2-7/8	4-3/8	5-7/8	7-3/8	3-1/8	4-7/8	6-5/8	8-3/8
5 Slot	6 Slots	7 Slots	8 Slots	5 Slot	6 Slots	7 Slots	8 Slots	5 Slot	6 Slots	7 Slots	8 Slots
7-5/8	8-7/8	10-1/8	11-3/8	8-7/8	10-3/8	11-7/8	13-3/8	10-1/8	11-7/8	13-5/8	15-3/8

N.L.= Nominal Length

Note: For the 6600-12-1, the BP/BPI plenum must be installed with 3/4" minimum/ 1-1/4" maximum opening between the bottom of the ceiling plane and the bottom of the hem of the BP/BPI plenum

Notes: (☐ check if provided)

1. Available Finishes	2. Available Accessories	3. Construction Details
☐ Mill Finish coated steel.	☐ Damper.	- Sizes available only 1-8 slots. - Round / Oval Inlet Collars from 6" - 14". Note: Boot Plenums are shipped separate for field installation.

Submittal No. BP-H

Date: 09/01/2003

Dimensions are in inches

Page: 1 of 1

Tag:



Series : BP

METAL*AIRE®

Submittal No: BP-S

Non Insulated / Insulated Boot Plenums Steel - Straight Plenums

Models: BP (BPI)-10-6 Boot Plenum - Non Insulated (Insulated) - Lay in T-Bar - 1 1/8" Border
 BP (BPI)-20-6 Boot Plenum - Non Insulated (Insulated) - Lay in T-Bar - 3/4" Border
 BP (BPI)-30-6 Boot Plenum - Non Insulated (Insulated) - Lay in T-Bar - 1/2" Border
 BP (BPI)-11-1 Boot Plenum - Non Insulated (Insulated) - Surface Mount - 1 1/8" Border
 BP (BPI)-40-7 Boot Plenum - Non Insulated (Insulated) - Concealed Spline - 25/32" Border
 BP (BPI)-40-8 Boot Plenum - Non Insulated (Insulated) - Drop Face - 25/32" Border
 BP (BPI)-40-9 Boot Plenum - Non Insulated (Insulated) - Donn Finline Ceiling Grid - 25/32" Border

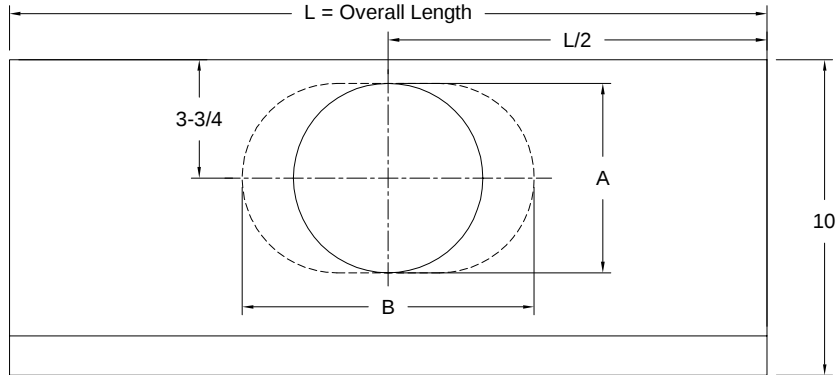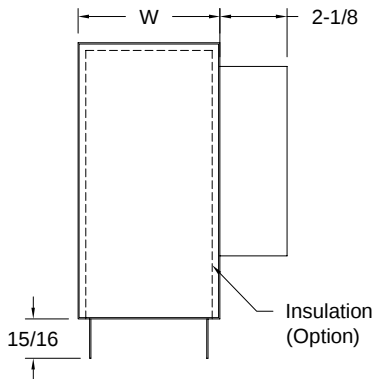

Models	Overall Length (L)
BP (BPI)-11-1	N.L. - 1/16
BP (BPI)-10-6	N.L. - 2 7/16
BP (BPI)-20-6	N.L. - 1 7/16
BP (BPI)-30-6	N.L. - 1 5/16
BP (BPI)-40-7	N.L. - 9/16
BP (BPI)-40-8	N.L. - 9/16
BP (BPI)-40-9	N.L. - 9/16

Available Inlets	Round Dim.(A)	Oval Dim.(A x B)
6	5-7/8	-
8	-	5-7/8 x 8-15/16
10	-	5-7/8 x 12-1/16
12	-	5-7/8 x 15-1/4
14	-	5-7/8 x 18-7/16

Available Nominal Lengths	24	36	48	60
---------------------------	----	----	----	----

Submittal Number BP-S

Model 6650 (1/2" slot width)				Model 6675 (3/4" slot width)				Model 6610 (1" slot width)			
Width (W)				Width (W)				Width (W)			
1 Slot	2 Slots	3 Slots	4 Slots	1 Slot	2 Slots	3 Slots	4 Slots	1 Slot	2 Slots	3 Slots	4 Slots
2-1/8	3-3/8	4-5/8	5-7/8	2-3/8	3-7/8	5-3/8	6-7/8	2-5/8	4-3/8	6 1/8	7-7/8
5 Slots	6 Slots	7 Slots	8 Slots	5 Slots	6 Slots	7 Slots	8 Slots	5 Slots	6 Slots	7 Slots	8 Slots
7-1/8	8-3/8	9-5/8	10-7/8	8-3/8	9-7/8	11-3/8	12-7/8	9-5/8	11-3/8	13-1/8	14-7/8

N.L.= Nominal Length

Notes: (☐ check if provided)

1. Available Finishes	2. Available Accessories	3. Construction Details
☐ Mill Finish coated steel.	☐ Damper.	- Sizes available only 1-8 slots. - Round / Oval Inlet Collars from 6" - 14". Note: Boot Plenums are shipped separate for field installation.

Submittal No. BP-S

Date: 09/01/2003

Dimensions are in inches

Page: 1 of 1