

Tag:


Series : **PHC**

METAL*AIRE®
Submittal No: **PHC**



High Induction Supply / Return Plenum Diffusers
Galvanized Steel - Louver Face - Fixed Curved Blade

Models: **PHCS-6** Supply Plenum Diffuser - Non Insulated
PHCSI-6 Supply Plenum Diffuser - Insulated
PHCR-6 Supply/Return Plenum Diffuser - Non Insulated
PHCRI-6 Supply / Return Plenum Diffuser - Insulated
PHCS-DB-6 Supply Plenum Diffuser - Center Down Blow Section - Non Insulated
PHCSI-DB-6 Supply Plenum Diffuser - Center Down Blow Section Insulated
PHCR-DB-6 Supply / Return Plenum Diffuser - Center Down Blow Section - Non Insulated
PHCRI-DB-6 Supply / Return Plenum Diffuser - Center Down Blow Section - Insulated

Front view (Models: PHCS & PHCR)

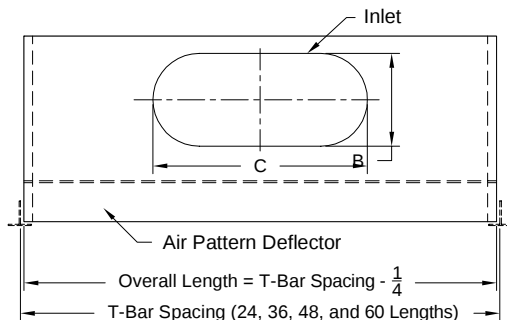


Front view (DB Models)

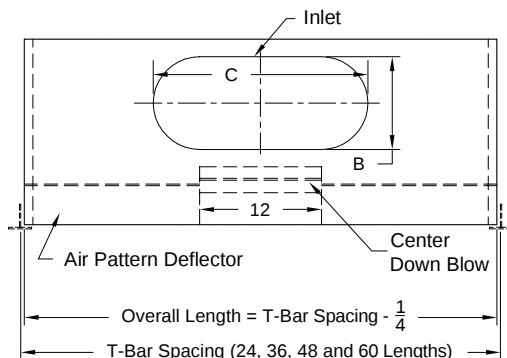


Nominal Lengths	Available Inlets
24	6, 8, 10, 12
36	6, 8, 10, 12
48	6, 8, 10, 12
60	6, 8, 10, 12

Inlet Size	B	C
6" Oval	3 15/16	6 15/16
8" Oval	3 15/16	8 15/16
10" Oval	3 15/16	13 15/16
12" Oval	3 15/16	15 15/16

Models: PHCS (I) - 6
PHCS (I) - DB - 6

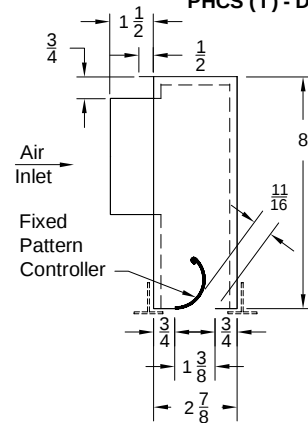

Models: PHCR (I) - 6
PHCR (I) - DB - 6

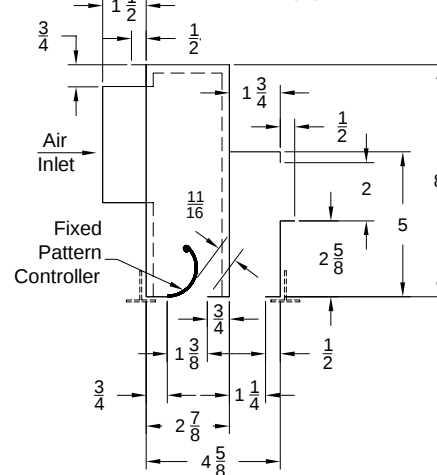

1. Available Finishes	2. Available Accessories	3. Construction Details
Standard Finish: ☐ Black Borders.	☐ LQ Locking Quadrant Damper.	- Extruded Aluminum Pattern Controller. - One-piece electrogalvanized steel plenum with double hem face. - Plenum inlets available in 6", 8", 10" and 12", (Inlets are round).

Notes: (☐ check if provided)

Dimensions are in inches

Cad File Number: PHC-46	Date: 03/25/2003	Submittal No. PHC	Page: 1 of 1
-------------------------	------------------	-------------------	--------------