


Tag:
Series : **PHP**

METAL*AIRE®
Submittal No: **PHP-TB**


Supply / Return Plenum Slot Diffusers
Steel - Lay in T-Bar

Models: **PHPS-50-6** Supply - Non Insulated - 1/2" Slot Width
PHPS-75-6 Supply - Non Insulated - 3/4" Slot Width
PHPS-10-6 Supply - Non Insulated - 1" Slot Width
PHPS-15-6 Supply - Non Insulated - 1 1/2" Slot Width
PHPSI-50-6 Supply - Insulated - 1/2" Slot Width
PHPSI-75-6 Supply - Insulated - 3/4" Slot Width
PHPSI-10-6 Supply - Insulated - 1" Slot Width
PHPSI-15-6 Supply - Insulated - 1 1/2" Slot Width
Adjustable Pattern Controller on all Supply units


Model: PHPS(I)-6 1 Slot
(-50, -75, -10, -15)

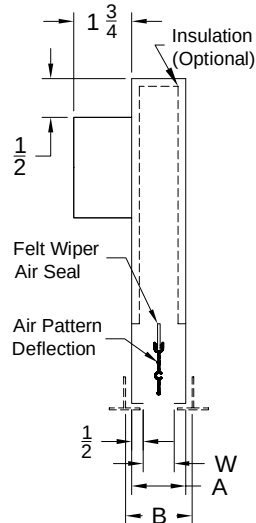


Model: PHPS(I)-6 2 Slots
(-50, -75, -10, -15)

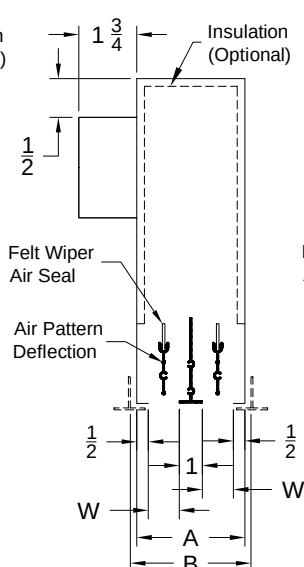


Model: PHPS(I)-6 3 Slots
(-50, -75, -10, -15)

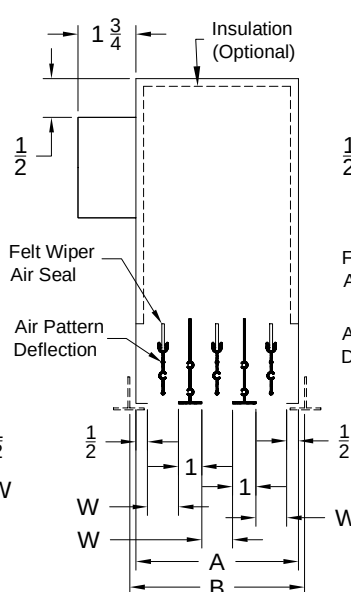

Model: PHPS(I)-6 4 Slots
(-50, -75, -10, -15)

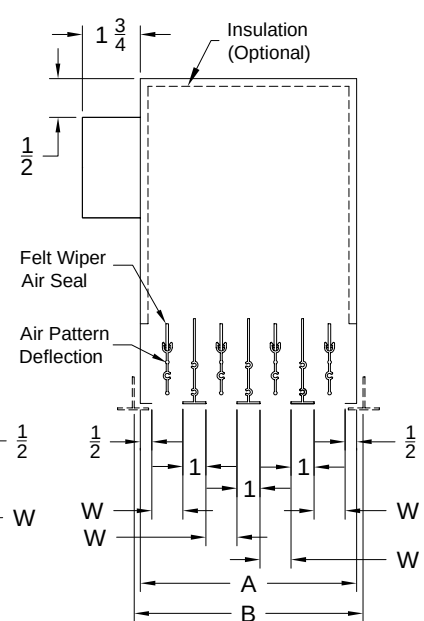

Front View

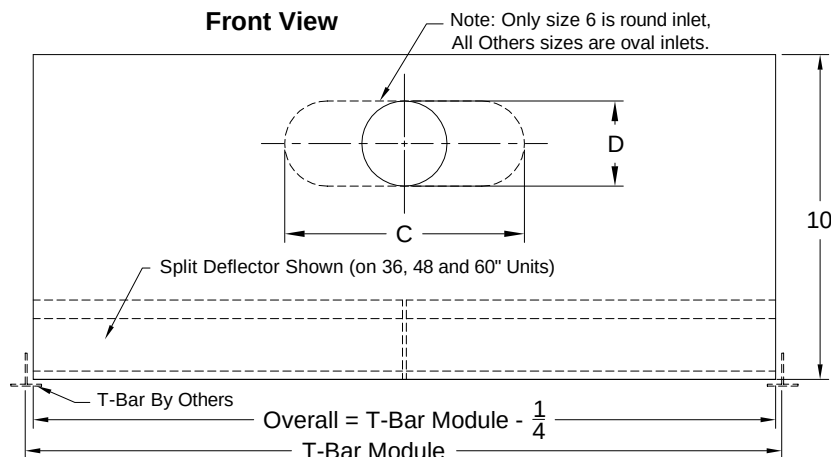

Inlet Size	C	D
6 Round	-	5 7/8
8 Oval	8 15/16	6
10 Oval	12 1/16	6
12 Oval	15 1/4	6

MODELS		L	W	1 Slot		2 Slots		3 Slots		4 Slots	
Supply	Return			A	B	A	B	A	B	A	B
PHPS(I)-50-6	PHPR(I)-50-6	24, 36, 48, 60	1/2	1 1/2	1 3/4	3	3 1/4	4 1/2	4 3/4	6	6 1/4
PHPS(I)-75-6	PHPR(I)-75-6	24, 36, 48, 60	3/4	1 3/4	2	3 1/2	3 3/4	5 1/4	5 1/2	7	7 1/4
PHPS(I)-10-6	PHPR(I)-10-6	24, 36, 48, 60	1	2	2 1/4	4	4 1/4	6	6 1/4	8	8 1/4
PHPS(I)-15-6	PHPR(I)-15-6	24, 36, 48, 60	1 1/2	2 1/2	2 3/4	5	5 1/4	7 1/2	7 3/4	10	10 1/4

Dimensions are in inches


Tag:
Series : PHP

METAL*AIRE®
Submittal No: PHP-TB


Supply / Return Plenum Slot Diffusers
Steel - Lay in T-Bar

Models: PHPR-50-6 Return - Non Insulated - 1/2" Slot Width
PHPR-75-6 Return - Non Insulated - 3/4" Slot Width
PHPR-10-6 Return - Non Insulated - 1" Slot Width
PHPR-15-6 Return - Non Insulated - 1 1/2" Slot Width
PHPRI-50-6 Return - Insulated - 1/2" Slot Width
PHPRI-75-6 Return - Insulated - 3/4" Slot Width
PHPRI-10-6 Return - Insulated - 1" Slot Width
PHPRI-15-6 Return - Insulated - 1 1/2" Slot Width
No Pattern Controller on Return Units


Model: PHPR(I)-6 1 Slot
(-50, -75, -10, -15)

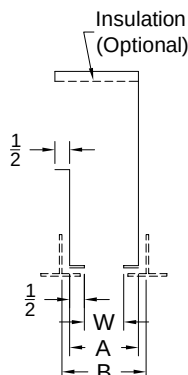


Model: PHPR(I)-6 2 Slots
(-50, -75, 10, -15)

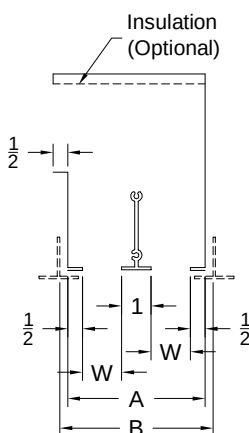

Model: PHPR(I)-6 3 Slots
(-50, -75, -10, -15)

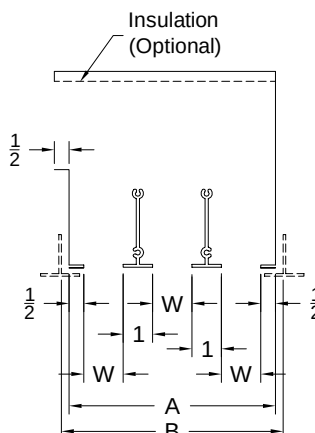


Model: PHPR(I)-6 4 Slots
(-50, -75, 10, -15)

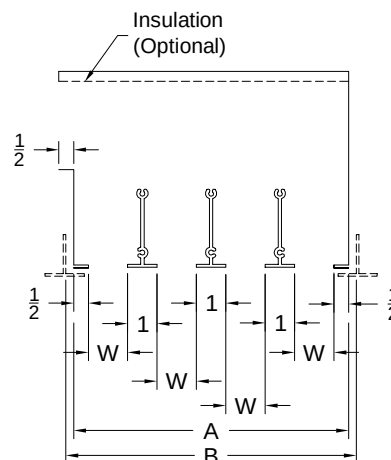

For Dimensions A, B, L & W See Table on Page 1

Front View

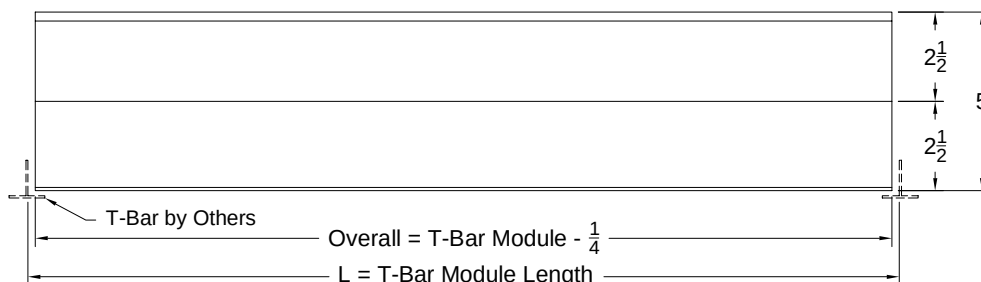

Notes: (☐ check if provided)

1. Available Finishes	2. Available Accessories	4. Construction Details
Standard Finish: ☐ 25-WT - White Tees with Black Borders. Optional Finishes (additional charge): ☐ 26 - White Tees and Borders. ☐ 27 - Black Tees and Borders.	(Factory Mounted) ☐ CN Cross Notch (For units over 24"). ☐ LQ Locking Quadrant Damper. ☐ T-1 One Outside Tee. ☐ T-2 Two Outside Tee. ☐ TC-1 One Outside Tee. ☐ TC-2 T-Bar clips both ends. ☐ TC-3 One T-Bar clip / One Outside Tee. ☐ EN-End Notch. ☐ EN-2 End Notch-Two Outer Tees.	- Extruded Aluminum Pattern Controller (Supply) - No Pattern Controller on Return units. - One-piece electrogalvanized steel plenum with double hem face. - Internal Insulation is 1/4" on one slot units.

Dimensions are in inches