


Tag:
Series : SG

METAL*LAIRE®
Submittal No: SG-ACC


Accessories For Security Grilles

Model:	SG-OBDE	Damper For Security Grille
	SAB	Steel Anchor Bars - Welded on Sleeve
	SBR	Duct Bars - Installed in Security Grilles
	LSA	Loose Steel Angles
	BSA	Bolted Steel Angles - Shipped Loose
	WSA	Welded Steel Angles - Welded to Grille Sleeve
	WAF	Companion Flanges - Welded Angle Frames


OBDE Damper

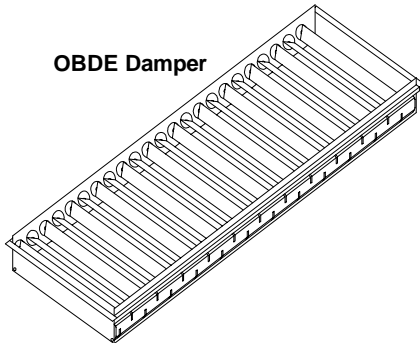

DS Debris Screen

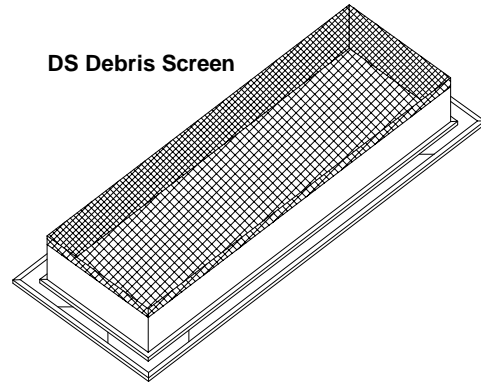


SG-OBDE




Rear
Operated
Opposed
Blades

SAB




1
2 Diameter 3"
Long For Concrete
Block Or Brick Wall.

SBR




1
2 Diameter Bar On
Maximum 6" Centers
Welded To Sleeve

LSA (showed LSA-4)




4pcs. 1" x 1" x 16
2 Long; 2 Short Dimension
With Mounting Holes and
Bolts (Shipped Loose)

BSA




1" x 1" x 16
Angles Bolted
To Sleeve

WSA



1" x 1" x 16
Angles Welded
To Sleeve


WAF




1" x 1" x 16
Welded Angle Flange
(Shipped Loose)



Detail A



Detail B



Detail C

Submittal Number SG-ACC

1. Construction Details

- SG- OBDE Dampers can be mounted for front or rear operation.
- SAB Steel Bars welded to sleeve , for anchoring into a concrete block or brick wall.
- SBR Security Bars are welded on 6" centers, vertical and horizontal.
- WAF Welded Angle Frames can be provided in any of the combinations shown.

Dimensions are in inches