


Tag:
Series : **SG**

METAL*LAIRE®
Submittal No: **SG**


Security Grilles / Registers Steel

Models: **SGSP** Security Grille - Square Holes - Mesh Screen Face
 SGRP Security Grille - With Perforated Face
 SGRPO Security Grille - Perforated Face (no Sleeve)
 SGRH Security Grille - Fixed Louver Face


Model: SGSP (Security Grille with Square Holes - Mesh Screen Holes)

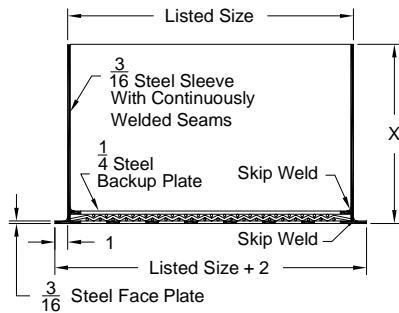


Face View SGSP & SGSP-sp Models

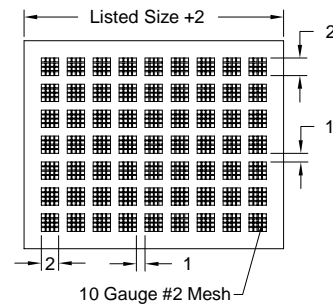


Model: SGRP (Security Grille with Perforated Face)

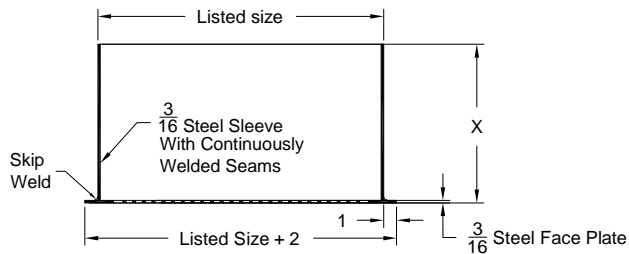

Face View (SGRP Model)

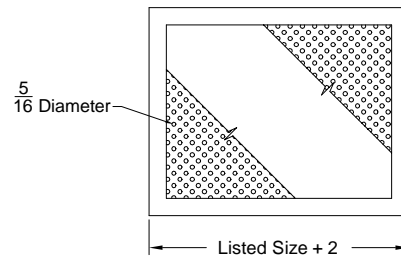


Model: SGRPO (Security Grille with Round Perforated Face Plate Only)

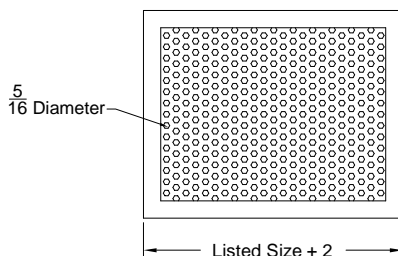


X = Sleeve Length (Has to be specified)

Model: SGRH (Security Grille - Fixed Louver Face)

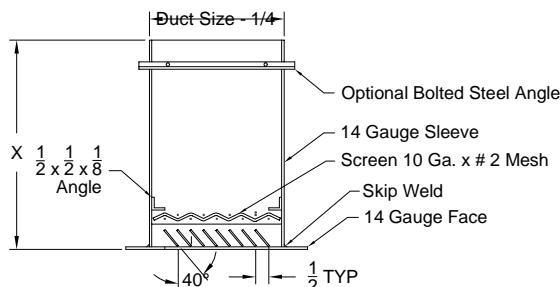

Face View (SGRH Model)

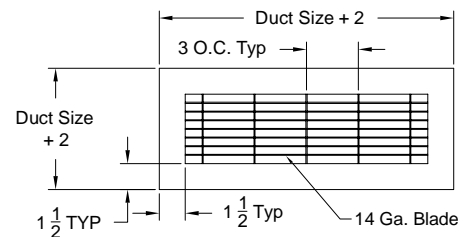

Dimensions are in inches


Tag:
Series : SG

METAL*LAIRE®
Submittal No: SG

Security Grilles / Registers Steel


Options: **SGSPD** Security Register - With OBDE Damper - Square Holes - Mesh Screen Face
SGRPD Security Register - With OBDE Damper - With Perforated Face
SGRHD Security Register - With OBDE Damper - Fixed Louver Face

Model: SGSPD (Security Register - With OBDE Damper)
(Square Holes - Mesh Screen Face)

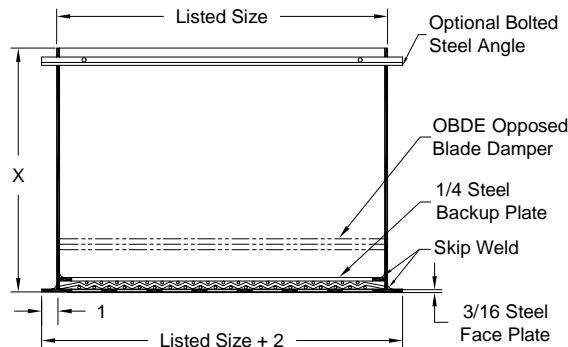


See Page 1 For Face View
X = Sleeve Length (Has to be specified)

Model: SGRPD (Security Register - With OBDE Damper)
(With Perforated Face)

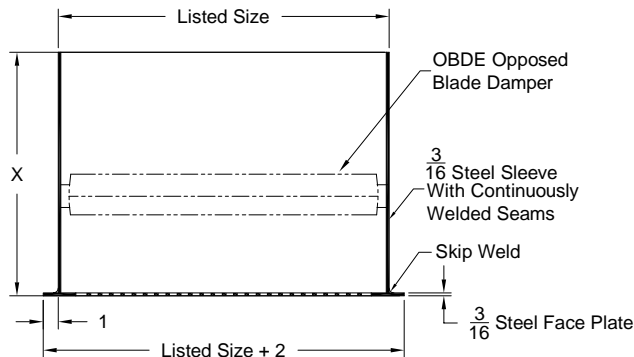

Model: SGRHD (Security Register - With OBDE Damper)
(Fixed Louver Face)

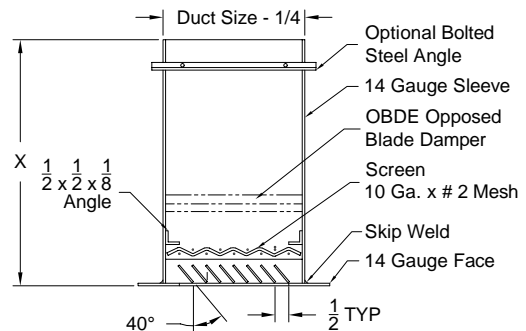

Submittal Number SG

1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
Standard Finish: <input type="checkbox"/> 01 White. Note: Contact Factory for other finish.	<input type="checkbox"/> Model SG OBDE Sleeve Mounted Damper (For Grilles). <input type="checkbox"/> Steel Anchors SAB. <input type="checkbox"/> Bolted Steel Angles BSA. <input type="checkbox"/> Welded Steel Angles WSA. <input type="checkbox"/> Security Bars SBR. <input type="checkbox"/> Screw Holes.	<input type="checkbox"/> Loose Steel Angles LSA. <input type="checkbox"/> Welded Angle Frame WAF.	<ul style="list-style-type: none">• Neck Sizes available in 2" increments as listed.• Damper can be mounted for rear operation with standard flat tip screwdriver. Due to tight bar spacing, face operated dampers are not recommended.• Face plate, sleeve and horizontal blades are 14 gauge steel.• Wire mesh is 10 gauge by # 2.

Notes: (☐ check if provided)

Dimensions are in inches

Cad File Number: SG-p2-88	Date: 03/25/2003	Submittal No. SG	Page: 2 of 2
---------------------------	------------------	------------------	--------------