

Tag:
Series : HRD-CL


METAL * AIRE®

Submittal No:HRD-CL-AL-M


Radial Flow Diffusers - Metric Dimensions Border 1 / Border 6 / Border 6M

Models: HRD-CL-AL-1 Aluminum Face & Backpan - Surface Mount
HRD-CL-AL-6 Aluminum Face & Backpan - Standard Lay in T-Bar
HRD-CL-AL-6M Aluminum Face & Backpan - Special 38 Lay in T-Bar


- ☐ **Models:** ☐ HRD - CL - AL One Way (Aluminum Backpan & Face)
☐ HRD - CL - AL Two Way (Aluminum Backpan & Face)

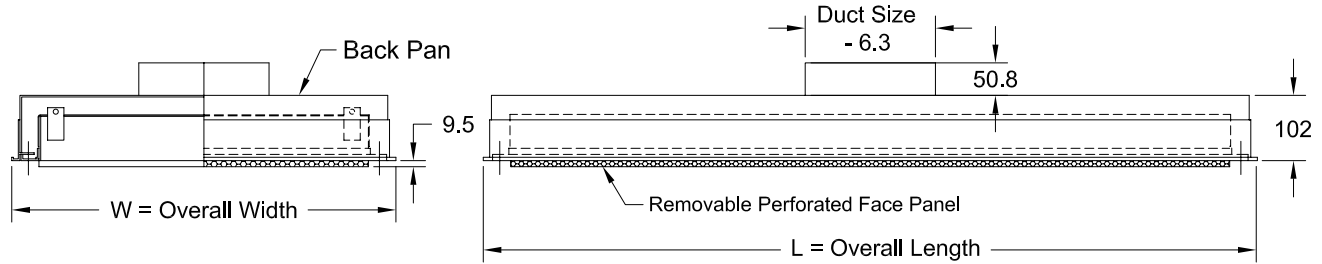


- ☐ **Model: HRD-CL-AL Border 1 (Surface Mount)**

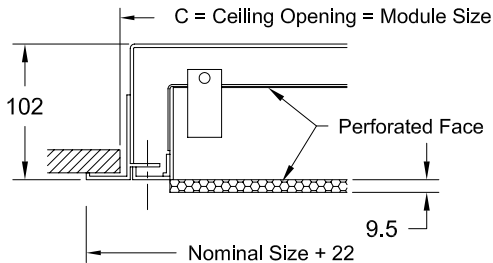

- ☐ **Model: HRD-CL-AL Border 6 (Standard Lay-In T-Bar)**

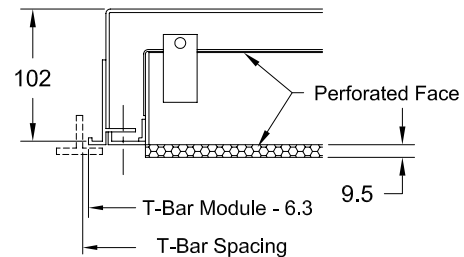

- ☐ **Model: HRD-CL-AL Border 6M (1 1/2 Inch Lay-In T-Bar)**

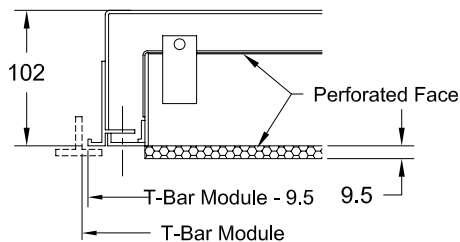

Nominal Size	Frame 1			Frame 6		Frame 6M	
	C	L	W	L	W	L	W
609 x 609	609 x 609	641	641	603	603	603	603
609 x 1219	609 x 1219	1251	641	1213	603	1213	603
305 x 1219	305 x 1219	1251	337	1213	298	1213	298

NOTE: Units Are Provided With Zinc Coated Non Painted Quarter Turn Fasteners.

Note: 305 x 1219 is only available with a One Way Pattern

Notes: (☐ check if provided)

1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
Standard Finish: ☐ 08 White epoxy powder coat.	☐ D3 Aluminum Radial Opposed Blade Damper. ☐ RSD Radial Shutter Damper.	☐ One Way (90° pattern). ☐ Two Way (180° discharge pattern)	- Perforated Faces are shipped with 2 safety cables. 51% Perforated Face. - Round Neck Sizes Available: 152, 203, 254, 305 & 356.