

Tag:
Series : HRD-CL


METAL * AIRE®

Submittal No:HRD-CL-SS-M


Radial Flow Diffusers - Metric Dimensions Border 1 / Border 6 / Border 6M

Models: HRD-CL-SS-1 Stainless Steel Face & Backpan - Surface Mount
HRD-CL-SS-6 Stainless Steel Face & Backpan - Standard Lay in T-Bar
HRD-CL-SS-6M Stainless Steel Face & Backpan - Special 38 mm Lay in T-Bar


- ☐ **Models:** ☐ HRD - CL - SS One Way (Stainless Steel Backpan & Face)
☐ HRD - CL - SS Two Way (Stainless Steel Backpan & Face)

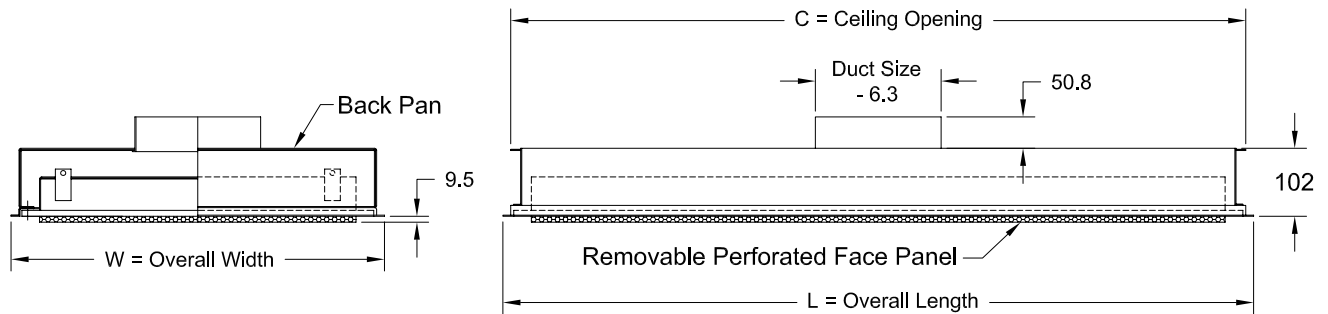


- ☐ **Model: HRD-CL-SS Border 1 (Surface Mount)**

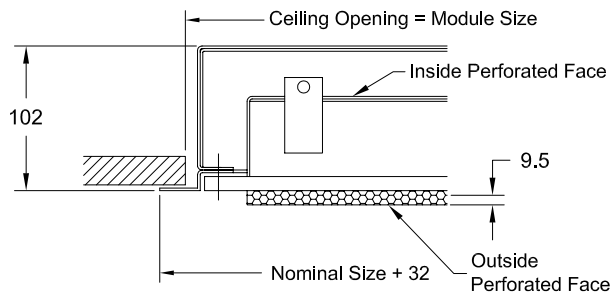

- ☐ **Model: HRD-CL-SS Border 6 (Standard Lay-In T-Bar)**

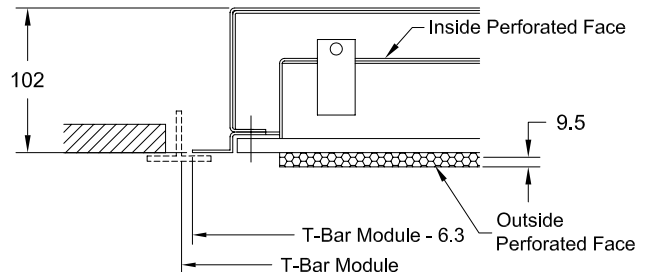

- ☐ **Model: HRD-CL-SS Border 6M (1 1/2 Inch Lay-In T-Bar)**

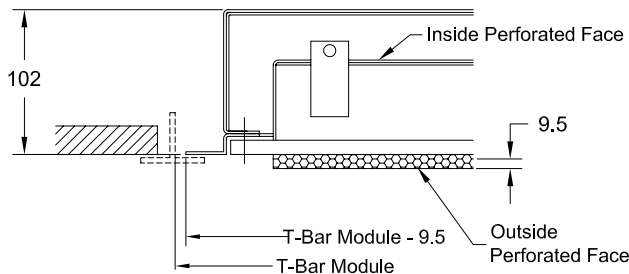

Nominal Size	Frame 1			Frame 6		Frame 6M	
	C	L	W	L	W	L	W
609 x 609	609 x 609	638.2	638.2	603	603	603	603
609 x 1219	609 x 1219	1248	638.2	1213	603	47 3/4	603

Notes: (☐ check if provided)

1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
Standard Finish: ☐ 23 #2B Scratch.	☐ D3 Aluminum Radial Opposed Blade Damper. ☐ RSD Radial Shutter Damper.	☐ One Way (90° pattern). ☐ Two Way (180° discharge pattern)	- Perforated Faces are shipped with 2 safety cables. 51% Perforated Face. - Round Neck Sizes Available 152, 203, 254, 305 & 356.