


**Tag:**  
**Series : SG**

**METAL \* AIRE®**  
**Submittal No: SG-M**


## Security Grilles / Registers Steel - Metric Dimensions

**Models:** **SGSP** Security Grille - Square Holes - Mesh Screen Face  
**SGRP** Security Grille - With Perforated Face  
**SGRPO** Security Grille - Perforated Face (no Sleeve)  
**SGRH** Security Grille - Fixed Louver Face


### □ Model: SGSP (Security Grille with Square Holes - Mesh Screen Holes)

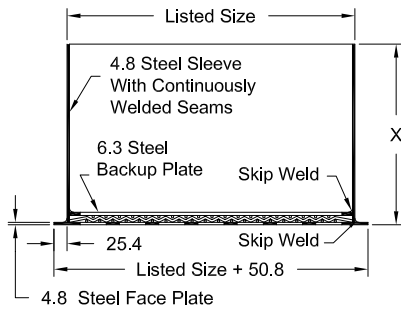


### Face View SGSP & SGSP-sp Models

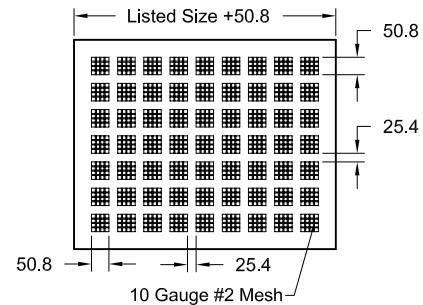


### □ Model: SGRP (Security Grille with Perforated Face)

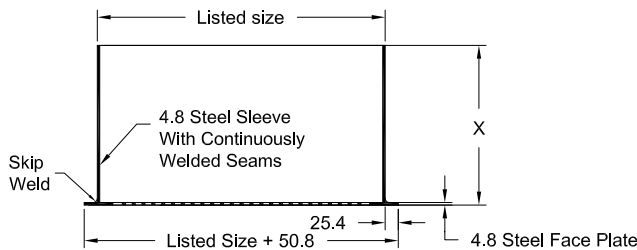

### Face View (SGRP Model)

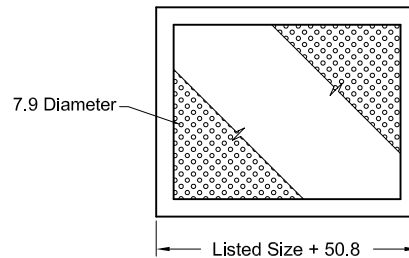


### □ Model: SGRPO (Security Grille with Round Perforated Face Plate Only)

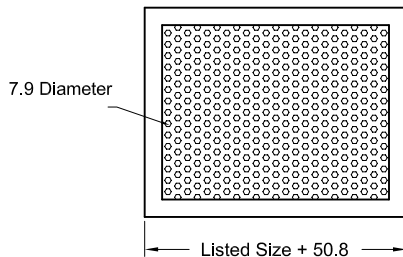


**X = Sleeve Length ( Has to be specified)**

### □ Model: SGRH (Security Grille - Fixed Louver Face)

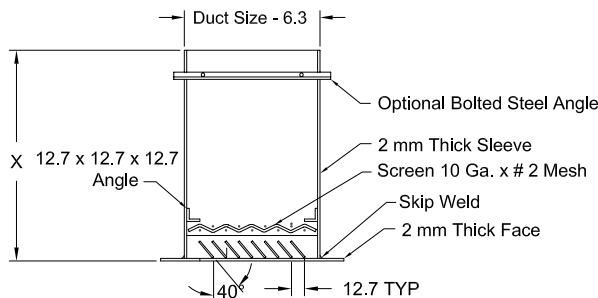

### Face View (SGRH Model)

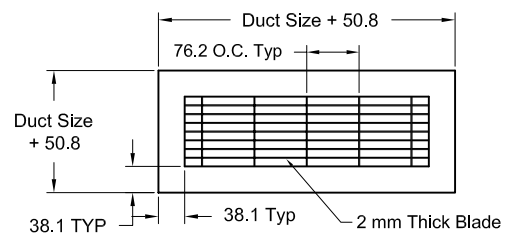

Submittal Number SG-M


Tag:  
Series : SG

**METAL \* AIRE®**  
Submittal No: SG-M

## Security Grilles / Registers Steel - Metric Dimensions


**Options:** **SGSPD** Security Register - With Opposed Blade Damper - Square Holes - Mesh Screen Face  
**SGRPD** Security Register - With Opposed Blade Damper - With Perforated Face  
**SGRHD** Security Register - With Opposed Blade Damper - Fixed Louver Face

☐ **Model: SGSPD (Security Register - With Opposed Blade Damper)**  
(Square Holes - Mesh Screen Face)

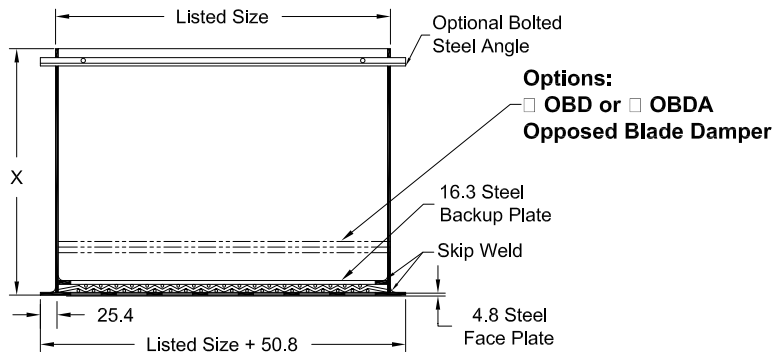


See Page 1 For Face View  
X = Sleeve Length (Has to be specified)

☐ **Model: SGRPD (Security Register - With Opposed Damper)**  
(With Perforated Face)

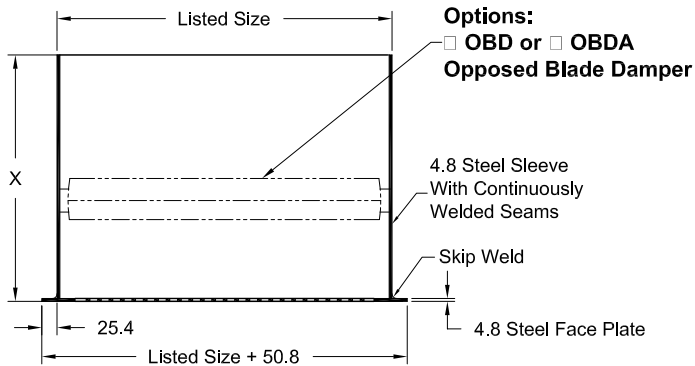

☐ **Model: SGRHD (Security Register - With Opposed Blade Damper)**  
(Fixed Louver Face)

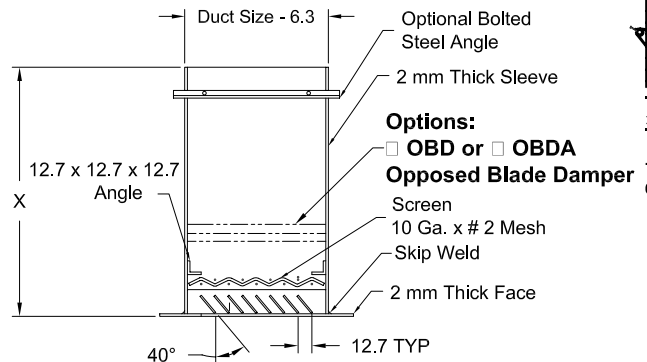

Notes: (☐ check if provided)

1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
<b>Standard Finish:</b> <input type="checkbox"/> 01 White. <b>Note: Contact Factory for other finish.</b>	<input type="checkbox"/> OBD Steel Opposed Blade Damper. <input type="checkbox"/> OBDA Aluminum Opposed Blade Damper <input type="checkbox"/> Steel Anchors SAB. <input type="checkbox"/> Bolted Steel Angles BSA. <input type="checkbox"/> Welded Steel Angles WSA. <input type="checkbox"/> Security Bars SBR. Screw Holes.	<input type="checkbox"/> Loose Steel Angles LSA. <input type="checkbox"/> Welded Angle Frame WAF.	<ul style="list-style-type: none"><li>• Neck Sizes available in 50 mm increments as listed.</li><li>• Damper can be mounted for rear operation with standard flat tip screwdriver. Due to tight bar spacing, face operated dampers are not recommended.</li><li>• Face plate, sleeve and horizontal blades are 2 mm thick steel.</li><li>• Wire mesh is 10 gauge by # 2.</li></ul>

Submittal No. SG-M

Date: 03/30/2006

Dimensions are in Millimeters

Page: 2 of 2