

118-FP BRASS GATE

175 WP • O. S. AND Y. • Solid Wedge Disc
Screwed Bonnet • Gland Packed • Screwed Ends

NEW YORK CITY BOARD OF STANDARDS and
APPROVAL

Approvals: U.L. Listed, F.M.,
N.Y.C. B.S.A. No. 1079-81-SA
MEA255-93-E




MATERIAL LIST

NO.	PART	MATERIAL	SPECIFICATION
1	Stem	Brass	CDA-360
2	Yoke Bushing	Brass	
3	Handwheel	Ductile Iron	
4	Bonnet	Brass	CDA-844
5	Packing Gland	Brass	
6	Packing		
7	Gland Follower Bolt	Stainless Steel	
8	Body	Brass	CDA-844
9	Wedge	Brass	

DIMENSIONS - INCHES / MILLIMETERS

Units	Size	A	B	C
Inches	1	2 1/2	6 1/2	8
MM	25.40	63.50	165.10	203.20
Inches	1 1/4	2 3/4	7 5/8	9 1/2
MM	31.75	69.85	193.68	241.30
Inches	1 1/2	6	8	10
MM	38.10	152.40	203.20	254.00
Inches	2	3	9	11 1/4
MM	50.80	76.20	228.60	285.75

† Non-Shock

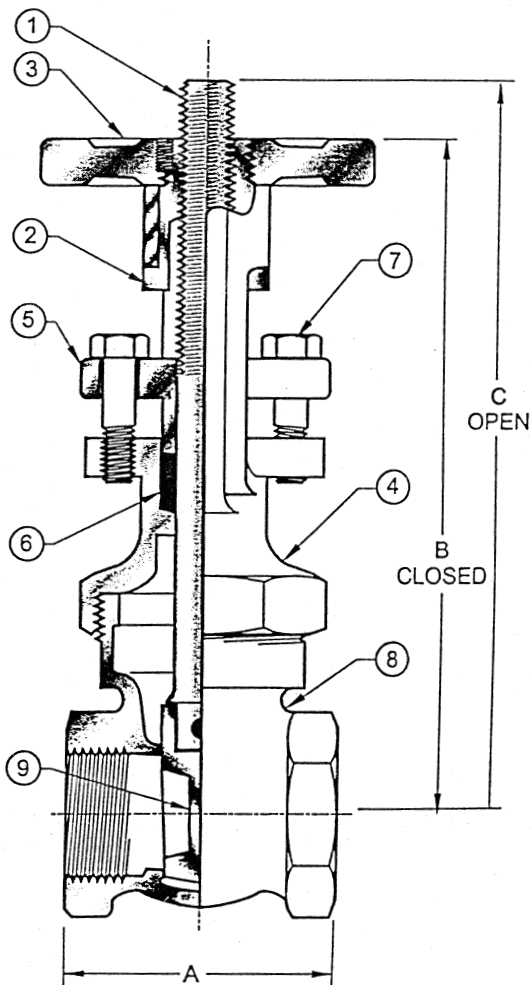

INNOVATION IN EVERY VALVE



MILWAUKEE VALVE

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the most current information access www.milwaukeevalve.com

www.milwaukeevalve.com