

CHECK 1510T

HORIZONTAL SWING – BRONZE


150 lb. SWP-300 lb. WOG† • Industrial Service
Composition Disc • Sweat Ends

SPECIFICATIONS

1510T	Conforms to: MSS SP-80. Type 4, Class 150, Threaded Ends.
-------	--

MATERIAL LIST

NO.	PART	MATERIAL	SPECIFICATION
1	Body	Bronze	ASTM B 62
2	Cap	Bronze	ASTM B 62
3	Lever	Bronze	Commercial
4	Disc	Teflon	
5	Disc Holder	Bronze	ASTM B 16 3/8" to 3/4" Incl. ASTM B 62 1" to 2" Incl.
6	Pin	St. Steel	Commercial
7	Plug (not shown)	Bronze	ASTM B 16
8	Retaining Ring	St. Steel	Commercial
9	Disc Nut	Bronze	Commercial

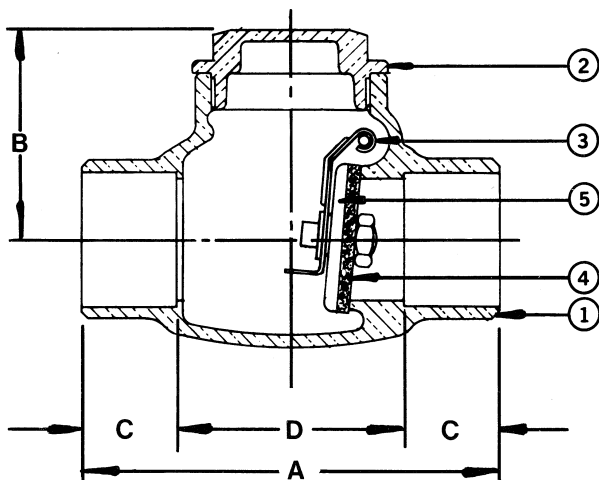

DIMENSIONS - INCHES / MILLIMETERS

Units	Size	A	B	C	D
Inches	3/8	2 1/4	1 7/16	3/8	1 1/2
MM	9.53	57.15	36.53	9.53	38.10
Inches	1/2	2 9/16	1 7/16	1/2	1 9/16
MM	12.70	65.10	36.53	12.70	39.70
Inches	3/4	3 5/16	1 11/16	3/4	1 3/4
MM	19.05	84.15	42.88	19.05	44.45
Inches	1	4	1 31/32	29/32	2 3/16
MM	25.40	101.60	50.01	23.01	55.58
Inches	1 1/4	4 1/4	2 5/32	31/32	2 5/16
MM	31.75	107.95	54.76	24.61	58.75
Inches	1 1/2	4 15/16	2 13/32	1 3/32	2 3/4
MM	38.10	125.43	61.11	27.79	69.85
Inches	2	6 1/8	2 13/16	1 11/32	3 7/16
MM	50.80	130.18	207.98	207.98	207.98

† Non-Shock

INNOVATION IN EVERY VALVE



MILWAUKEE VALVE

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the most current information access www.milwaukeevalve.com

www.milwaukeevalve.com