

2885-FP

2 1/2" - 8"

IRON GATE, 175 WP, O. S. AND Y.,
SOLID WEDGE DISC, BOLTED BONNET,
GLAND PACKED, FLANGED ENDS
**NEW YORK CITY BOARD OF STANDARDS and
APPROVAL**

Approvals: U.L. Listed, F.M.,
N.Y.C. B.S.A. No.278-90-SM



MATERIALS LIST

ITEM	PART	MATERIAL	SPECIFICATION
1	Stem	Silicon Bronze (1)	ASTM B98
2	Handwheel	Ductile Iron	ASTM A636
3	Identification Plate	Aluminum	
4	Yoke Bushing	Brass	ASTM B16
5	Handwheel	Cast Iron	ASTM A126, Class B
6	Yoke Bushing Nut (2)	Cast Iron	
7	Bonnet (3)	Cast Iron	
8	Yoke (3)	Cast Iron	
9	Gland Follower Nut	Steel	ASTM A563
10	Gland Follower	Ductile Iron	ASTM A536
11	Packing Gland	Brass	ASTM B16
12	Packing	non-asbestos	Garlock® 5022
13	Gland Follower Bolt	Steel	ASTM A307-B
14	Backseat Bushing	Brass	ASTM B16
15	Nut	Steel	ASTM A563
16	Body Gasket	non-asbestos	Garlock® 3000
17	Bolt	Steel	ASTM A307-B
18	Body	Cast Iron	ASTM A126, Class B
19	Wedge	Cast Iron	
20	Seat Ring	Cast Bronze	ASTM B62
21	Wedge Face Ring	Cast Bronze	


(1) 8" is Brass ASTM B-16.

(2) Sizes 2-1/2" to 6" only.

(3) Sizes 2-1/2" & 3" made with yoke integral with bonnet. Sizes 4" through 8" made with separate yoke bolted to bonnet.

MATERIALS LIST

	UNITS	2-1/2"	3"	4"	6"	8"
A	INCHES	7.50	8.00	9.00	10.50	11.50
	mm	190.5	203.2	228.6	266.7	292.1
B	INCHES	16.00	18.50	22.25	30.50	38.38
	mm	406.4	469.9	565.2	774.7	974.9
C	INCHES	6.00	7.00	8.00	11.75	13.50
	mm	152.4	177.8	203.2	298.5	342.9
D	INCHES	7.00	7.50	9.00	11.00	13.50
	mm	177.8	190.5	228.6	279.4	342.9
E	INCHES	0.69	0.75	0.94	1.00	1.13
	mm	17.5	19.1	23.9	25.4	28.7
Cv		335	510	945	2250	4150

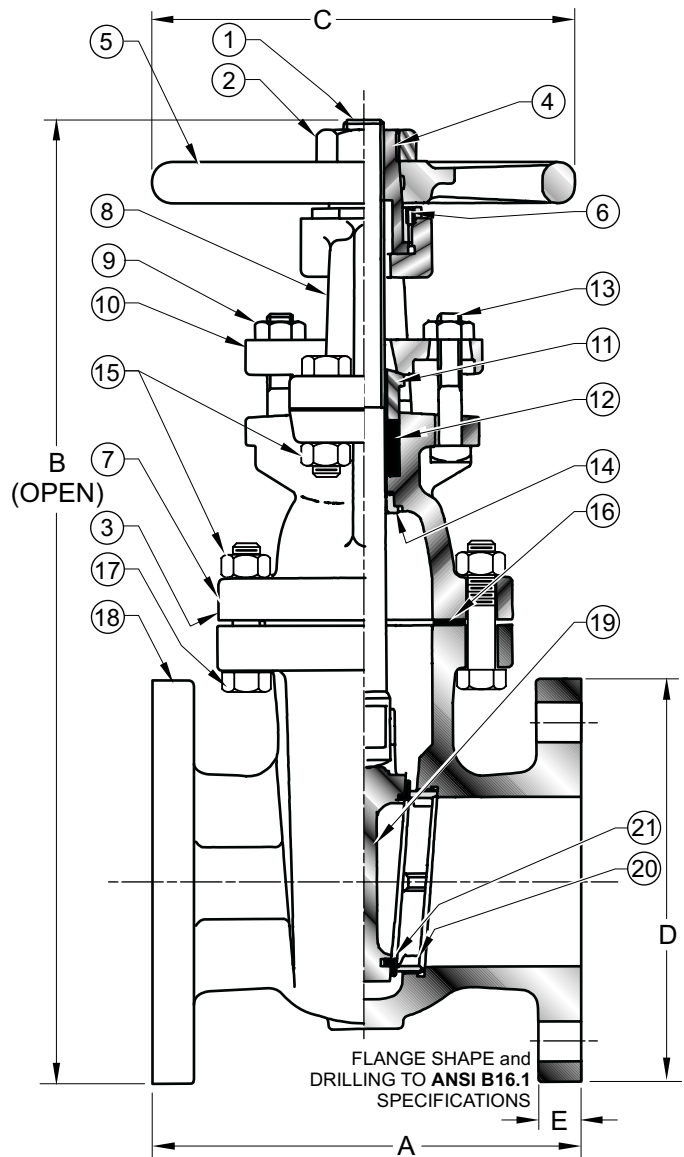

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the most current information access www.milwaukeevalve.com.