



GLOBE CLASS 300

2" - 8"



Specifications	
Design	API 600, ASME B 16.34
P-T Rating	ASME B 16.34
Face to Face	ASME B 16.10
Connection	ASME B 16.5, 16.25
Test & Inspection	API 598, RP 591

3060CB2 FLANGED ENDS
3062CB2 BUTT-WELDED ENDS

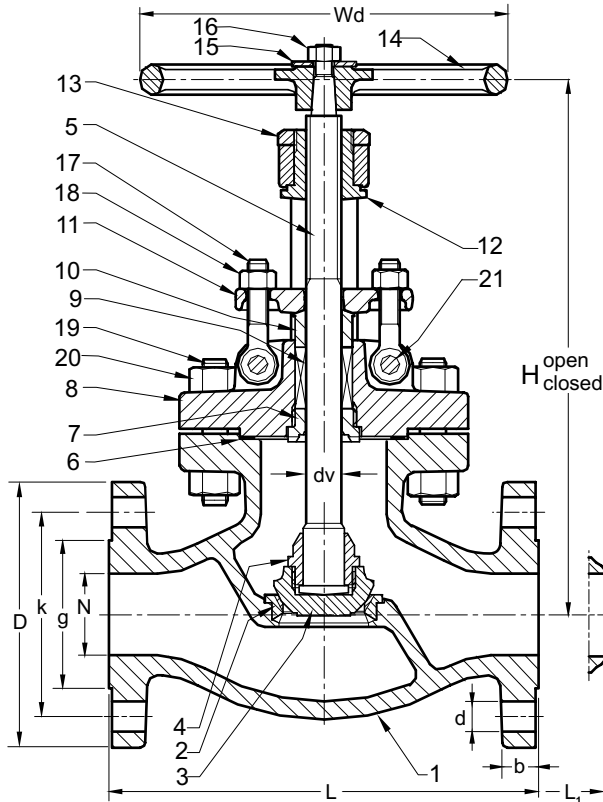

Key	Part	ASTM Material Specification Unless otherwise specified
1	Body	A 216 Gr WCB
2	Seat Ring / Facing	A 105 / Co-Cr-W Face
3	Disc	A 182 Gr F6a
4	Disc Nut	A 182 Gr F6a
5	Stem	A 182 Gr F6a
6	Gasket	Spiral Wound S/S w/ Graphite
7	Backseat Bushing	A 276 Type 410
8	Bonnet	A 216 Gr WCB
9	Packing	Graphoil w/ Braided Rings
10	Gland	A 182 Gr F6a
11	Gland Flange	A 105
12	Yoke Nut	A 439 Type D2
13	Yoke Bushing	A 47 Gr 32510
14	Handwheel	A 47 Gr 32510
15	Lockwasher	A 105
16	Handwheel Nut	Carbon Steel
17	Gland Eyebolt	Carbon Steel
18	Gland Eyebolt Nut	A 307 Gr B
19	Body Bonnet Stud	A 193 Gr B7
20	Body Bonnet Stud Nut	A 194 Gr 2H
21	Gland Eyebolt Pin	Carbon Steel

GENERAL DIMENSIONS															
Size	Nominal Size Dia. N	Line Flange					Face to Face BW L=L1	Height		Stem dv	Line Flange Bolts		Turns to Open	Hand- wheel Wd	Weight Approx.
		Dia. D	Thickness b	Bolt Circle Dia. k	Hole Dia. d	Raised Face Dia. g		Open H	Closed H		Quantity	Size			
NPS	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)		INCHES (metric)		INCHES (mm)	lbs (kg)
2	2.00	6.50	0.88	5.00	0.75	3.62	10.50	15.43	14.16	0.88	8	5/8	5.7	9.00	70
	50.8	165.1	22.4	127.0	19.1	91.9	266.7	391.9	359.7	22.2		M16		228.6	32
2-1/2	2.50	7.50	1.00	5.88	0.88	4.12	11.50	15.63	14.30	0.88	8	3/4	5.7	9.00	97
	63.5	190.5	25.4	149.4	22.4	104.6	292.1	397.0	363.2	22.2		M20		228.6	44
3	3.00	8.25	1.12	6.62	0.88	5.00	12.50	18.20	16.35	1.00	8	3/4	9.6	10.00	123
	76.2	209.6	28.4	168.1	22.4	127.0	317.5	462.3	415.3	25.4		M20		254.0	56
4	4.00	10.00	1.25	7.88	0.88	6.19	14.00	21.46	19.63	1.25	8	3/4	11.7	14.00	196
	101.6	254.0	31.8	200.2	22.4	157.2	355.6	545.1	498.6	31.8		M20		355.6	89
6	6.00	12.50	1.44	10.62	0.88	8.50	17.50	28.05	23.92	1.50	12	3/4	10.4	18.00	345
	152.4	317.5	36.6	269.7	22.4	215.9	444.5	712.5	607.6	38.1		M20		457.2	157
8	8.00	15.00	1.63	13.00	1.00	10.62	19.50	39.60	33.62	1.75	12	3/4	16.0	20.00	650
	203.2	381.0	41.4	330.2	25.4	269.7	495.3	1005.8	853.9	44.5		M20		508.0	295

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the most current information access www.milwaukeevalve.com.



MILWAUKEE VALVE