


CHECK 515

HORIZONTAL SWING – BRONZE

150 lb. SWP-300 lb. WOG† • Industrial Service
Bronze Seat • Bronze Disc • Threaded Ends

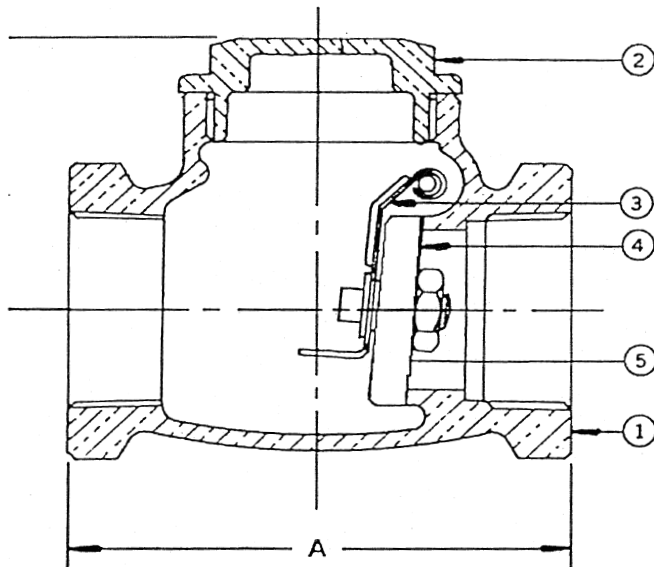

SPECIFICATIONS

515	Conforms to: MSS SP-80. Type 3, Class 150, Threaded Ends.
-----	--

MATERIAL LIST

NO.	PART	MATERIAL	SPECIFICATION
1	Body	Bronze	ASTM B 62
2	Cap	Bronze	ASTM B 62
3	Lever	Bronze	Commercial
4	Disc	Bronze	ASTM B 62
5	Disc Holder	Bronze	ASTM B 16 1/4" to 3/4" Incl. ASTM B 62 1" to 2" Incl.
6	Pin	St. Steel	Commercial
7	Plug (not shown)	Bronze	ASTM B 16
8	Retaining Ring	St. Steel	Commercial
9	Disc Nut	Bronze	Commercial

DIMENSIONS - INCHES / MILLIMETERS

Units	Size	A	B
Inches	1/4	2 1/8	1 7/16
MM	6.35	53.98	36.53
Inches	3/8	2 1/8	1 7/16
MM	9.53	53.98	36.53
Inches	1/2	2 5/16	1 7/16
MM	12.70	58.75	36.53
Inches	3/4	2 5/8	1 11/16
MM	19.05	66.68	42.88
Inches	1	3 1/4	2
MM	25.40	82.55	50.80
Inches	1 1/4	3 9/16	2 1/8
MM	31.75	90.50	53.98
Inches	1 1/2	4	2 3/8
MM	38.10	101.60	60.33
Inches	2	4 3/4	2 13/16
MM	50.80	130.18	207.98

† Non-Shock

INNOVATION IN EVERY VALVE



MILWAUKEE VALVE

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the most current information access www.milwaukeevalve.com

www.milwaukeevalve.com