


ANGLE 595T BRONZE

150 lb. SWP-300 lb. WOG† • Heavy Duty Service
Teflon Disc • Union Bonnet • Gland Packed • Threaded Ends

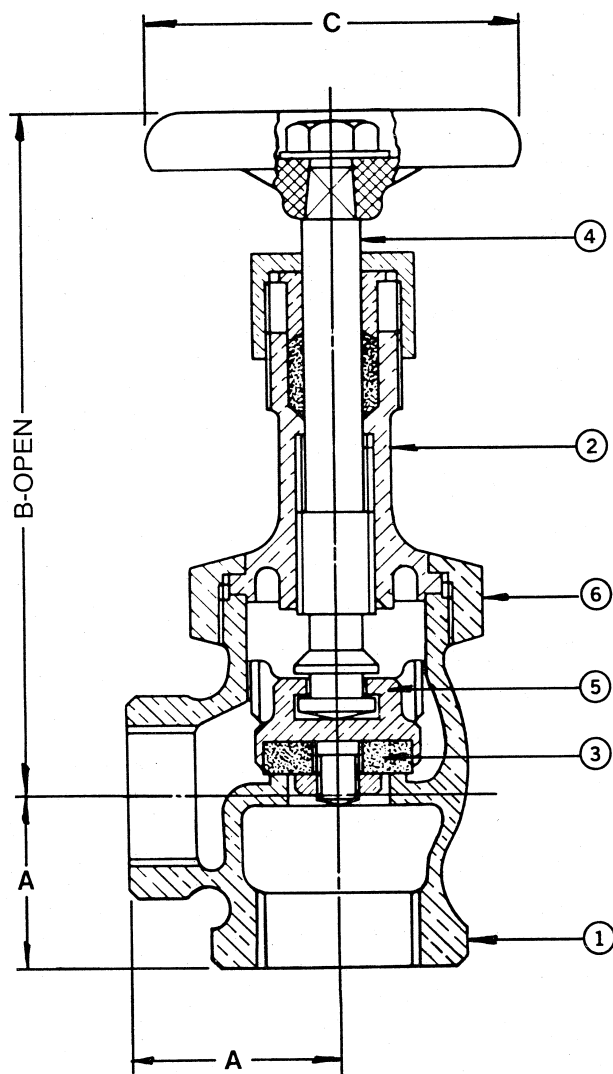

SPECIFICATIONS

595T	Conforms to: MSS SP-80. Type 2, Class 150, Threaded Ends.
------	--

MATERIAL LIST

NO.	PART	MATERIAL	SPECIFICATION
1	Body	Bronze	ASTM B 62
2	Bonnet	Bronze	ASTM B 62
3	Disc	Teflon	
4	Stem	Bronze	ASTM B 62
5	Disc Holder	Bronze	ASTM B 16 1/4" to 3/4" ASTM B 62 1" to 3" Incl.
6	Union Bonnet Nut	Bronze	ASTM B 62
7	Packing	Non-Asbestos	Commercial
8	Gland	Bronze	ASTM B 16
9	Packing Nut	Bronze	Commercial
10	Disc Nut	Bronze	Commercial
11	Handwheel	Mall. Iron	Commercial
12	Identification Plate	Aluminum	Commercial
13	Handwheel Nut	Bronze	Commercial

DIMENSIONS - INCHES / MILLIMETERS

Units	Size	A	B	C
Inches	1/4	1 1/16	3 15/16	2
MM	6.35	27.00	100.03	50.80
Inches	3/8	1 3/16	4 1/4	2
MM	9.53	30.18	107.95	50.80
Inches	1/2	1 3/16	5 1/8	2 1/2
MM	12.70	30.18	130.18	63.50
Inches	3/4	1 7/16	5 3/16	2 3/4
MM	19.05	36.53	131.78	69.85
Inches	1	1 3/4	6 9/16	3 1/8
MM	25.40	44.45	166.70	79.38
Inches	1 1/4	2 1/16	6 1/4	3 1/2
MM	31.75	52.40	158.75	88.90
Inches	1 1/2	2 1/4	7 5/8	4
MM	38.10	57.15	193.68	101.60
Inches	2	2 3/4	8 7/8	4 3/4
MM	50.80	69.85	225.43	120.65

† Non-Shock

INNOVATION IN EVERY VALVE



MILWAUKEE VALVE

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the most current information access www.milwaukeevalve.com

www.milwaukeevalve.com