

GATE 901


BRONZE - QUICK OPENING

150 lb. SWP-300 lb. WOG† • Lever Operated
Double Disc • Gland Packed • Threaded Ends

4" size has O-ring stem seal and a bolted flanged cap (not shown)

MATERIAL LIST

NO.	PART	MATERIAL
1	Body	Bronze
2	Cap	Bronze
3	Lever	Bronze
4	Male Disc	Bronze
5	Female Disc	Bronze
6	Bonnet (Center Piece)	Bronze
7	Stem	Bronze
8	Gland	Bronze
9	Packing Nut	Bronze
10	Lever Handle	Malleable Iron
11	Packing	Non-Asbestos
12	Handle Nut	Steel
13	Gland Spring	Steel

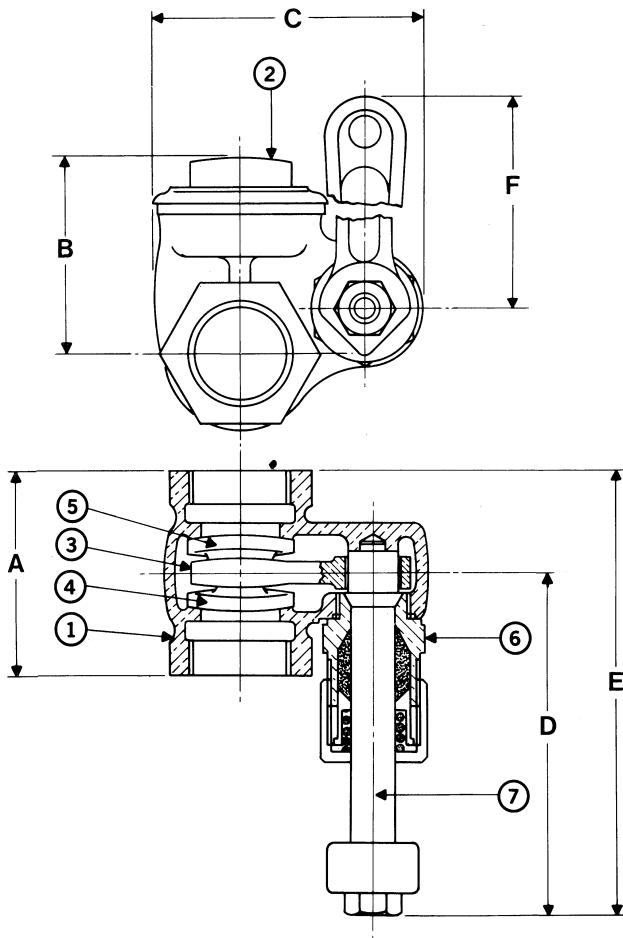

DIMENSIONS - INCHES / MILLIMETERS

Units	Size	A	B	C	D	E	F
Inches	1/2	2	1 3/4	2 3/8	2 13/16	3 13/16	4 3/4
MM	12.70	50.80	44.45	60.33	71.45	96.85	120.65
Inches	3/4	2 1/4	2 3/16	2 15/16	3 1/4	4 3/8	4 3/4
MM	19.05	57.15	55.58	74.63	82.55	111.13	120.65
Inches	1	2 1/2	2 3/8	3 3/8	3 3/4	5	7
MM	25.40	63.50	60.33	85.73	95.25	127.00	177.80
Inches	1 1/4	2 7/8	2 13/16	3 27/32	3 11/16	5 1/8	8 3/16
MM	31.75	73.03	71.45	97.64	93.68	130.18	207.98
Inches	1 1/2	3 3/16	3 1/4	4 11/32	4 1/8	5 3/4	10 1/2
MM	38.10	80.98	82.55	110.33	104.78	146.05	266.70
Inches	2	3 3/4	4 1/8	5 5/16	4 1/2	6 3/8	10 1/2
MM	50.80	95.25	104.78	134.95	114.30	161.93	266.70
Inches	2 1/2	4 1/4	4 1/2	5 15/16	4 7/8	7	11 1/2
MM	63.50	107.95	114.30	150.83	123.83	177.80	292.10
Inches	3	4 3/4	5 5/8	7	5	7 3/8	11 1/2
MM	76.20	120.65	142.88	177.80	127.00	187.33	292.10
Inches	4	6	7 9/16	8 7/8	5 9/16	8 9/16	14
MM	101.60	152.40	192.10	225.43	141.30	217.50	355.60

† Non-Shock

INNOVATION IN EVERY VALVE



MILWAUKEE VALVE

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the most current information access www.milwaukeevalve.com

www.milwaukeevalve.com