


BUTTERFLY VALVE

CL SERIES-REV. C

2"-12" - 200 PSI (1380 kPa)

Dead End Service to 150 psi

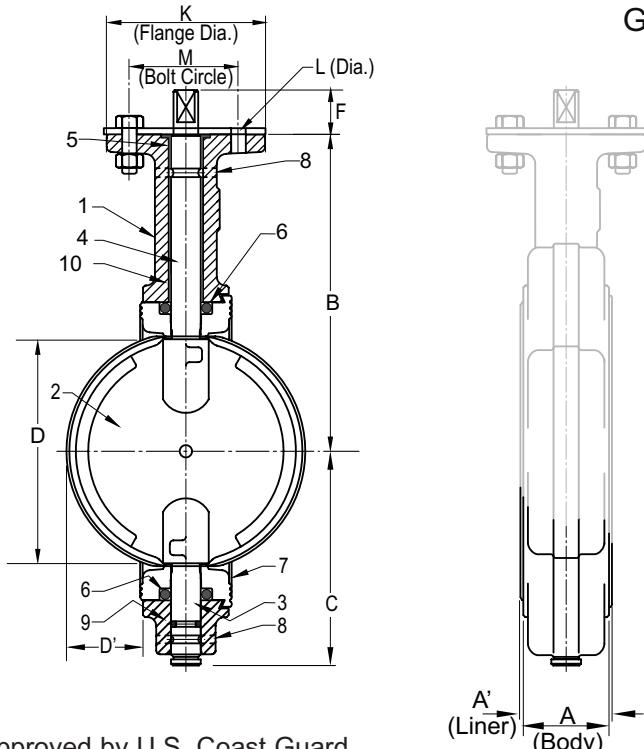


Approved by U.S. Coast Guard
for use in Category A service as
described in Title 46 Code of
Federal Regulations 46.20-15.

RATINGS

200 PSI Butterfly Valve
Non Shock Water, Oil,
Gas

SPECIFICATIONS

MSS SP-67
API-609

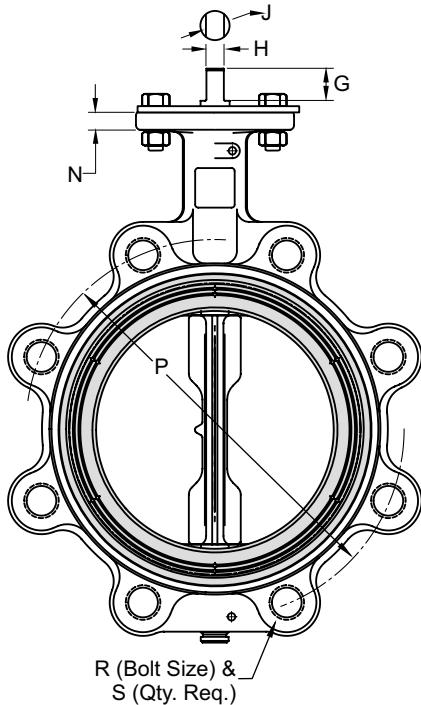

DIMENSIONS

	INCHES	2	2-1/2	3	4	5	6	8	10	12
	mm	50	65	80	100	125	150	200	250	300
A (Body)	INCHES	1.69	1.81	1.81	2.07	2.19	2.19	2.38	2.69	3.19
	mm	42.9	46.1	46.0	52.5	55.6	55.6	60.3	68.3	81.0
A' (Liner)	INCHES	1.82	1.94	1.94	2.20	2.32	2.31	2.51	2.82	3.32
	mm	46.1	49.1	49.1	55.8	58.8	58.7	63.6	71.5	84.2
B	INCHES	5.50	6.00	6.25	7.00	7.53	8.00	9.38	10.19	12.06
	mm	139.7	152.4	158.8	177.8	191.3	203.2	238.1	258.8	306.4
C	INCHES	3.06	3.31	3.75	4.25	4.94	5.56	6.56	7.88	9.25
	mm	77.8	84.1	95.3	108.0	125.4	141.3	166.7	200.0	235.0
D (Chord Dia)	INCHES	1.49	2.01	2.64	3.67	4.71	5.66	7.72	9.70	11.68
	mm	37.8	51.1	67.1	93.2	119.6	143.8	196.1	246.4	296.7
D' (Intrusion)	INCHES	0.28	0.44	0.69	1.06	1.50	1.94	2.84	3.69	4.50
	mm	7.1	11.1	17.5	27.0	38.1	49.2	72.2	93.7	114.3
F	INCHES	1.13	1.13	1.13	1.13	1.13	1.13	1.50	1.50	1.50
	mm	28.6	28.6	28.6	28.6	28.6	28.6	38.1	38.1	38.1
G	INCHES	0.81	0.81	0.81	0.81	0.81	0.81	1.06	1.06	1.06
	mm	20.6	20.6	20.6	20.6	20.6	20.6	27.0	27.0	27.0
H	INCHES	0.35	0.35	0.35	0.40	0.40	0.44	0.53	0.71	0.71
	mm	8.9	8.9	8.9	10.2	10.2	11.2	13.5	18.0	18.0
J	INCHES	0.50	0.50	0.50	0.56	0.56	0.62	0.75	1.00	1.00
	mm	12.6	12.6	12.6	14.2	14.2	15.8	19.0	25.4	25.4
K		4	4	4	4	4	4	6	6	6
L (Dia)	INCHES	0.44	0.44	0.44	0.44	0.44	0.44	0.56	0.56	0.56
	mm	11.1	11.1	11.1	11.1	11.1	11.1	14.3	14.3	14.3
M	INCHES	3.25	3.25	3.25	3.25	3.25	3.25	5.00	5.00	5.00
	mm	82.6	82.6	82.6	82.6	82.6	82.6	127.0	127.0	127.0
N	INCHES	0.44	0.44	0.44	0.44	0.44	0.44	0.50	0.50	0.50
	mm	11.1	11.1	11.1	11.1	11.1	11.1	12.7	12.7	12.7
P	INCHES	4.75	5.50	6.00	7.50	8.50	9.50	11.75	14.25	17.00
	mm	120.7	139.7	152.4	190.5	215.9	241.3	298.5	362.0	431.8
R		5/8-11	5/8-11	5/8-11	5/8-11	3/4-10	3/4-10	3/4-10	7/8-9	7/8-9
S		4	4	4	8	8	8	8	12	12

ITEM	PARTS NAME	MATERIAL
1	BODY	CAST IRON-ASTM A126 CL B
2	DISC	ALUMINUM BRONZE-ASTM B 148
3	BOTTOM STEM	STAINLESS STEEL TYPE 416
4	TOP STEM	STAINLESS STEEL TYPE 416
5	TOP BEARING	RPTFE
6	SEAL	EPDM
7	LINER	EPDM
8	ROLL PIN	STAINLESS STEEL
9	STEM SEAL	EPDM
10	LOWER BEARING	RPTFE
11	OPERATOR	LEVER HANDLE EPOXY COATED LEVER GEAR OPERATOR GEAR OP W/ MEMORY STOP GEAR OP W/ LOCK ACTUATOR-AIR/AIR ACTUATOR-AIR/SPRING ACTUATOR-ELECTRIC

CL_101000_MAT.XLS

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the most current information access www.milwaukeevalve.com

