

DESCRIPTION

- Chrome plated metal construction
- Brass or copper waterways
- 1/2" IPS shanks
- Supplied with vandal resistant screws

OPERATION

- Lever style handles with hot and cold color indicators
- Hot side counterclockwise To open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

FLOW

- Aerator is limited to 2.2 gpm max (8.3 L/min)

CARTRIDGE

- 1224 cartridge design
- Nonmetallic and stainless steel material


STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1 and all applicable specifications referenced therein
- Certified to NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- **ADA**  for lever handle

WARRANTY

- Warranted for 5 years against material or manufacturing defects

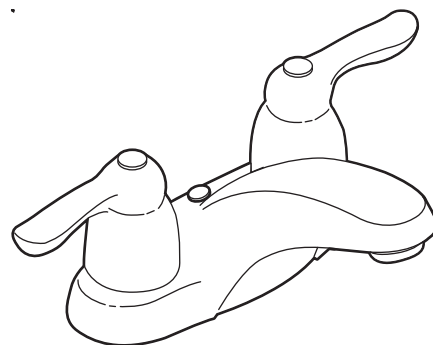

Two-Handle Lavatory Faucet

Less Waste


Model: 8915

with Metal Waste Assembly

Model: 8917



NOTE: DESIGNED TO INSTALL THROUGH
3-1" MIN. DIA. HOLES 2" ON CENTER

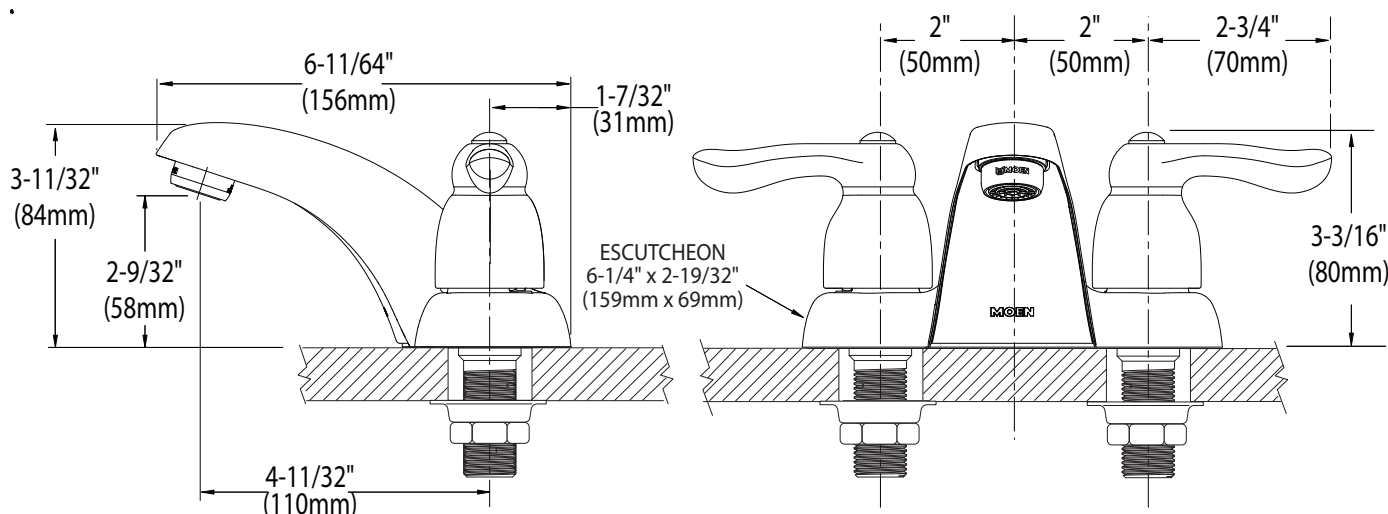

CRITICAL DIMENSIONS

(DO NOT SCALE)