

DESCRIPTION

- Chrome plated metal construction
- Pressure balancing cycle valve design with 1/4 turn stops
- 3 function transfer valve
- 1/2" CC connections
- Contains: stationary showerhead, hand-held shower, 69" metal hose, 30" slide bar, drop ell and vacuum breaker
- **Slide bar is NOT DESIGNED TO BE A GRAB BAR**
- Applicable components are supplied with vandal resistant screws

OPERATION

- Temperature and transfer valves both have ADA compliant lever style handles
- Temperature handle operates counterclockwise through a 270° arc with off at 6 o'clock, and the maximum hot at the 9 o'clock position
- Adjustable temperature limit stop
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 2^\circ$
- Transfer valve operates 3 distinct functions

FLOW

- 2.5 gpm (9.5L/min) hand-held shower and stationary shower head

CARTRIDGE

- 1222 cartridge design in temperature control valve accommodates back to back installations
- Ceramic disc cartridge in transfer valve


STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including ASSE 1016

- **ADA**  for lever handle



WARRANTY

- Warranted for 5 years against material or manufacturing defects

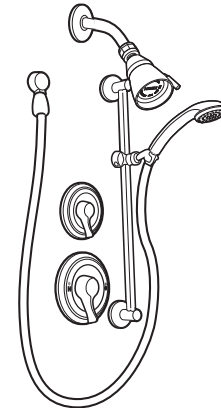

**Three-Function
Commercial Shower System**

Model: 8342

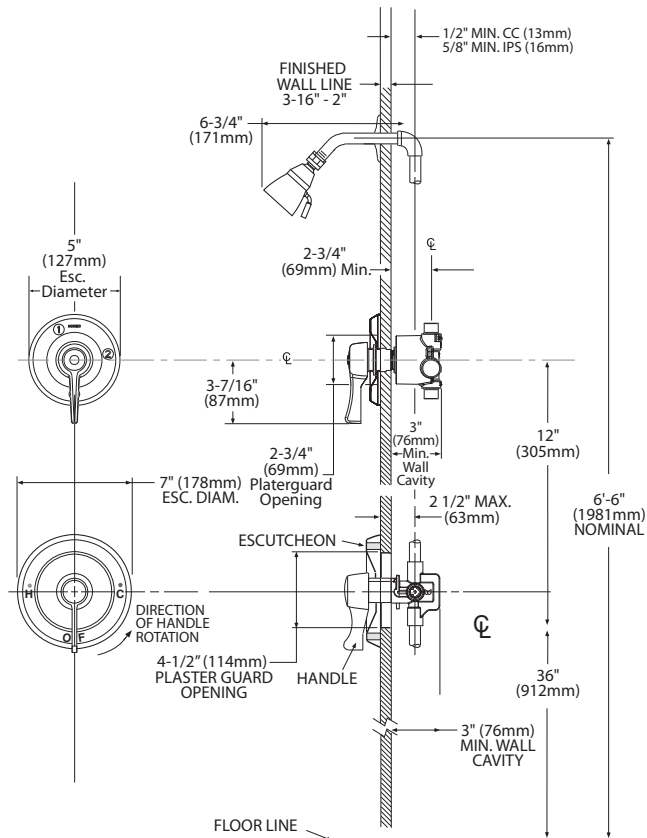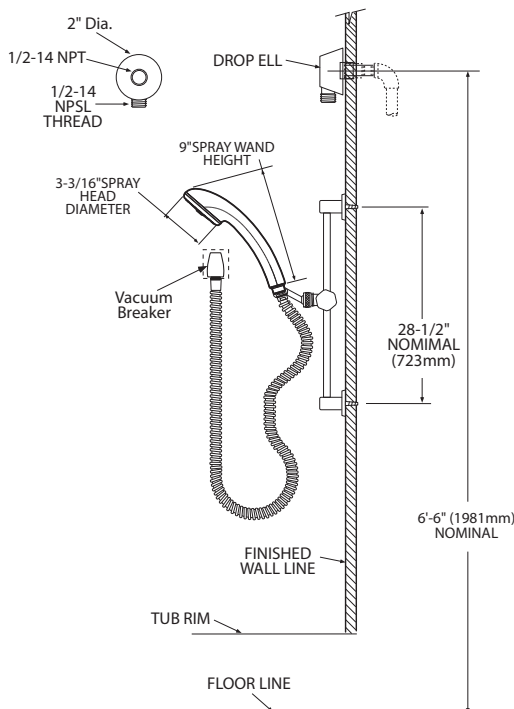

NOTE: This valve is not intended to be used as a shut-off valve. To prevent the potential of cross flow, check valves must be integral to the supply valve or installed in both hot and cold water supply lines.

CRITICAL DIMENSIONS

(DO NOT SCALE)