

## DESCRIPTION

- Chrome plated metal construction
- Pressure balancing cycle valve design
- 3 function transfer valve
- Shower arm has 1/2" IPS male thread
- Contains: showerhead, hand-held shower, 69" metal hose, 30" slide bar, drop ell, vacuum breaker and mounting hardware
- **Slide bar is NOT DESIGNED TO BE A GRAB BAR**
- Supplied with vandal resistant screws
- Quick cleaning rubber nozzles

## OPERATION

- Temperature and transfer valve both have ADA compliant lever style handles
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock, and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3.6^\circ$
- Transfer valve operates 3 distinct functions
- Single function spray pattern
- Easy to operate pause button (reduces the flow of water to a trickle)

## FLOW

- 1.5 gpm (5.7 L/min) MAX at 80 psi / 1.1 gpm (4.2 L/min) MIN at 45 psi hand-held shower and stationary shower head

## CARTRIDGE

- 1222 or 1222HD cartridge
- Accommodates back-to-back installations


## STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including ASSE 1016

- **ADA**  for lever handle



## WARRANTY

- Warranted for 5 years against material or manufacturing defects

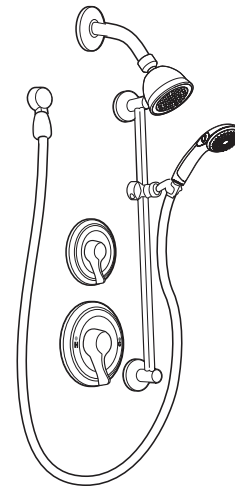

**Single-Handle  
Posi-Temp Shower System  
(With 3 Function Transfer Valve)**

**Model: T8342EP15**

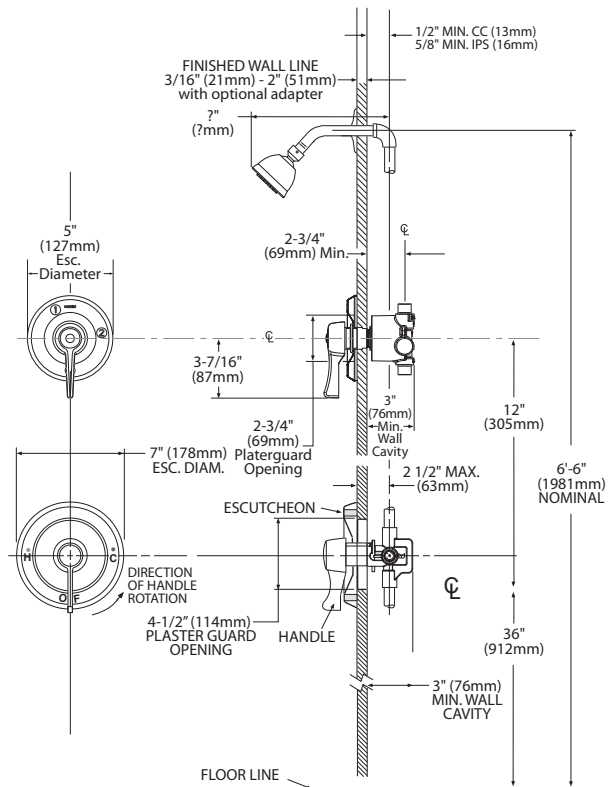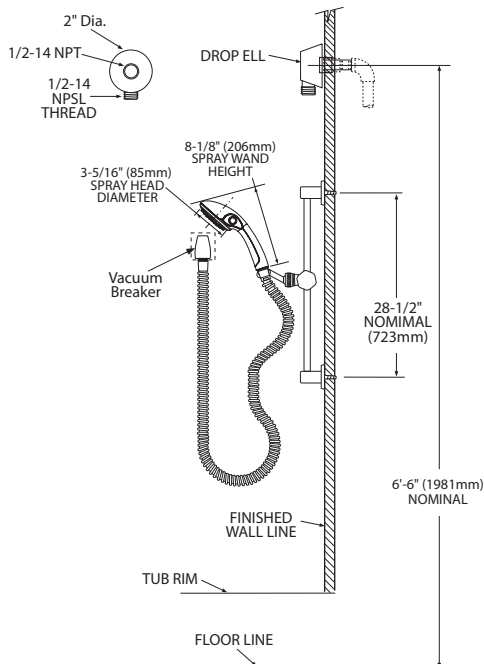

NOTE: This valve is not intended to be used as a shut-off valve. To prevent the potential of cross flow, check valves must be integral to the supply valve or installed in both hot and cold water supply lines.

\*Refer to (ADAAG) guidelines or local codes for proper ADA installation.

## CRITICAL DIMENSIONS

(DO NOT SCALE)