

6VCDP and 6VCXDP

Submersible Dry Pit

6" Non-Clog Wastewater Pumps

Standard (6VCDP) and Explosion-Proof (6VCXDP)



THE 6VCDP AND 6VCXDP (EXPLOSION-PROOF) SUBMERSIBLE DRY PIT WASTEWATER PUMPS ARE A HEAVY-DUTY 6" NON-CLOG SERIES CAPABLE OF PASSING A FULL 3 $\frac{3}{16}$ " SPHERICAL SOLID. Myers rounded port, 2-vane, enclosed impellers prevent solids from binding or clogging and offer high operating efficiencies to cut your pumping costs. The 6VCDP series modified constant velocity volute case provides smooth operation over an extended portion of the performance curve for longer seal and bearing life. For use in municipal and industrial waste applications. Myers offers a complete line of submersible dry pit wastewater pumps, controls and accessories to meet your needs. Call your Myers distributor, or the Myers Ohio sales office at 419-289-1144 for more details.

ADVANTAGES BY DESIGN

HIGH EFFICIENCY HYDRAULIC DESIGN CUTS PUMPING COSTS AND EXTENDS LIFE OF FLUID END COMPONENTS.

- Two-vane, rounded port, enclosed type impeller handles 3 $\frac{3}{16}$ " solids with ease at high operating efficiencies.
- Modified constant velocity volute offers quiet operation, low radial loads over extended portion of performance curve.

DURABLE MOTOR WILL DELIVER MANY YEARS OF RELIABLE SERVICE

- Class H insulation.
- Continuous duty/VFD magnet wire.
- Oil-filled motor for maximum heat dissipation and constant bearing lubrication.
- Heat sensor thermostats imbedded in windings protect motor from over heat conditions.
- Seal leak probes warn of moisture entry; helps prevent costly motor burn-out.
- Double tandem shaft seals prevent sewage from entering motor.
- Power and control cables are triple sealed with epoxy, compression grommet and terminal board.

AVAILABLE WITH OPTIONAL F.M. APPROVAL FOR USE IN CLASS 1, GROUPS C AND D HAZARDOUS LOCATIONS (6VCXDP Only).

PRODUCT CAPABILITIES

Capacities To	2400 gpm	151.2 L/S
Heads To	146 ft.	44.5 m
Solids Handling	3 $\frac{3}{16}$ in.	80 mm
Liquids Handling	raw unscreened sewage, effluent, storm water	
Intermittent Liquid Temp.	up to 140°F	up to 60°C
Winding Insulation Temp. (Class H)	356°F	180°C
Available Motors	1750 RPM: 15-60 HP 230/460/575V 3Ø, 60 Hz. 1150 RPM: 5-20 HP 200/230/460/575V, 3Ø 60 Hz. 870 RPM: 2-7 $\frac{1}{2}$ HP 200/230/460/575V, 3Ø, 60 Hz	
Std. Third Party Approvals	CSA (pending)	
Optional Approvals	FM Class 1, Groups C & D (pending - 6VCXDP only)	
Acceptable pH Range	6 - 9	
Specific Gravity	.9 - 1.1	
Viscosity	28 - 35 SSU	
Discharge, Horizontal Flanged Centerline	6 in. 125 lb. ANSI	152.4 mm

NOTE: Consult factory for applications outside of these recommendations.

Construction Materials	
Motor Housing, Seal Housing, Cord Cap and Volute Case	cast iron, Class 30 ASTM A48
Enclosed 2-Vane Impeller	ductile iron, Class 65 ASTM A536-80
Power and Control Cord	25 ft. SOW/SOW-A
Mechanical Seals Standard Optional	double tandem, type 21 carbon and ceramic lower tungsten, carbide
Pump, Motor Shaft	416 SST
Fasteners	300 Series SST
Volute Wear Ring	brass
Base Elbow	cast iron, Class 30, ASTM A48

WHERE INNOVATION MEETS TRADITION

Myers®

Pentair Pump Group

6VCDP and 6VCXDP

Submersible Dry Pit

6" Non-Clog Wastewater Pumps

Standard (6VCDP) and Explosion-Proof (6VCXDP)

POWER & CONTROL CORDS

SOW-A, FM and CSA approved oil-resistant cable.

CABLE ENTRY SYSTEM

Provides triple seal protection. Cable jacket sealed by compression grommet. Individual wires sealed by epoxy potting. Terminal board separates motor chamber from cord cap.

HEAT SENSOR

Protects motor from burn-out due to excessive heat from any overload condition. Automatically resets when motor has cooled.

MOTOR STATOR

Heat shrunk into housing for perfect alignment and best heat transfer. Oil-filled motor conducts heat and lubricates bearings. Class H insulation.

BALL BEARINGS

Upper and lower ball bearings support shaft and rotor and take axial and radial loads.

SHAFT SEALS

Double tandem mechanical shaft seals protect motor. Oil-filled seal chamber provides continuous lubrications.

SEAL LEAK PROBES

Detect water in seal housing. Activates warning light in control panel.

HEAVY 416 SST SHAFT

Corrosion resistant.

SLEEVE BEARING

Takes radial shock load; provides flame path.

BRASS WEAR RING

Prevents rust build-up and reduces leakage and wear. Replaceable to restore original running clearances and pump efficiencies.

VOLUTE CASE

Modified constant velocity volute handles 3 3/16" solids. 6" ANSI 125 lb. flange.

CLEAN-OUT PORT


Easy access for servicing.

HIGH EFFICIENCY IMPELLER

Two-vane with rounded ports. Handles 3 3/16" solids. Pump out vanes help keep trash from seal; reduces pressure at seal faces.

DIMENSIONS

[] Dimensions in mm

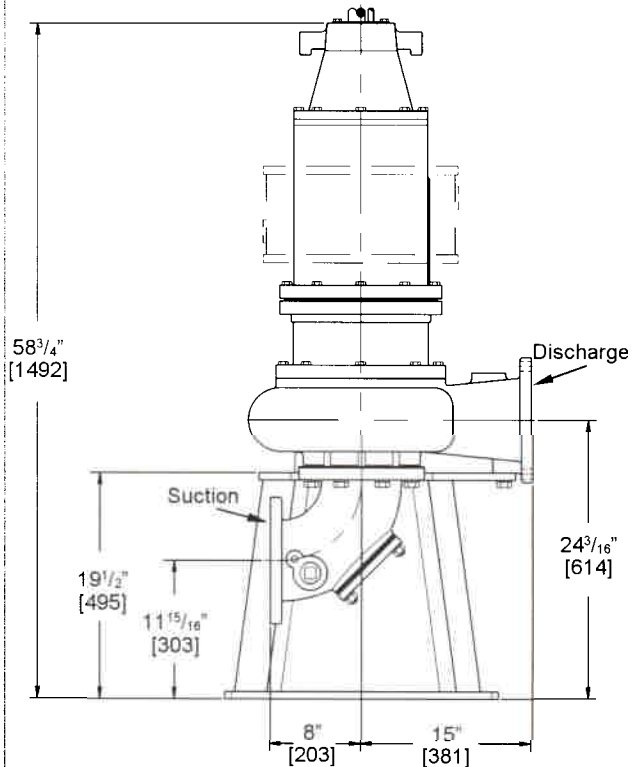

PERFORMANCE CURVE

