






MODEL A-XAD-6 *EXTRUDED ADJUSTABLE LOUVER* *DRAINABLE BLADE*

Standard Construction:

- Frame:** 6" x .081 (152 mm x 2.1 mm) extruded aluminum (6063-T5).
Blades: .081 (2.1 mm) extruded aluminum (6063-T5), approximately 5" (127 mm) on centers.
Blade Angle: 37.5°
Bearings: Permanently lubricated oilite bronze, press fit into frame.
Axles: 3/8" (9.5 mm) square plated steel.
Linkage: Plated steel.
Operator: Wing nut slide bracket.
Screen: Bird screen - 3/4" x .050 (19 mm x 12.7 mm) flattened expanded aluminum in a removable frame on interior of louver.
Finish: Mill aluminum.
Minimum Section Size: 12"w x 12"h (25.4 mm x 25.4 mm)
Maximum Section Size: 48"w x 72"h (1219 mm x 1829 mm) with jamb seals
 60"w x 96"h (1524 mm x 2438 mm) without jamb seals

Options

- Screens:** Insect screen - 18 x 16 mesh aluminum
 Other - _____
Blade Seals: Extruded vinyl
Jamb Seals: Flexible Stainless steel
Finish: Prime Coat
 Baked Enamel
 Clear Anodize - 204-R1 and 215-R1
 Integral Color Anodize
 Kynar 500 Enamel
 Other - _____
Sill Extensions:
Flange: 1-1/2" (38 mm) (front or rear)
Frame: .125 (3.2 MM) Extruded Aluminum
Other Operator - _____

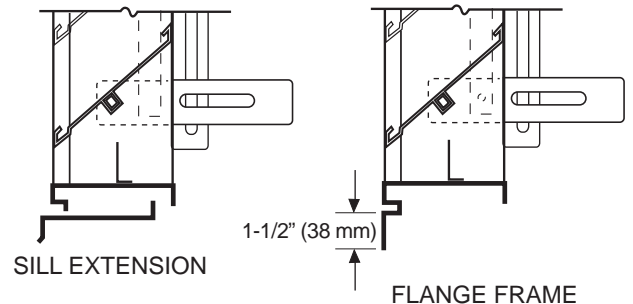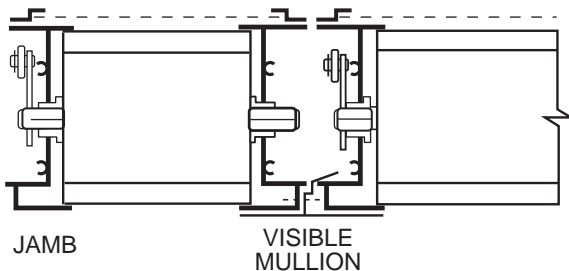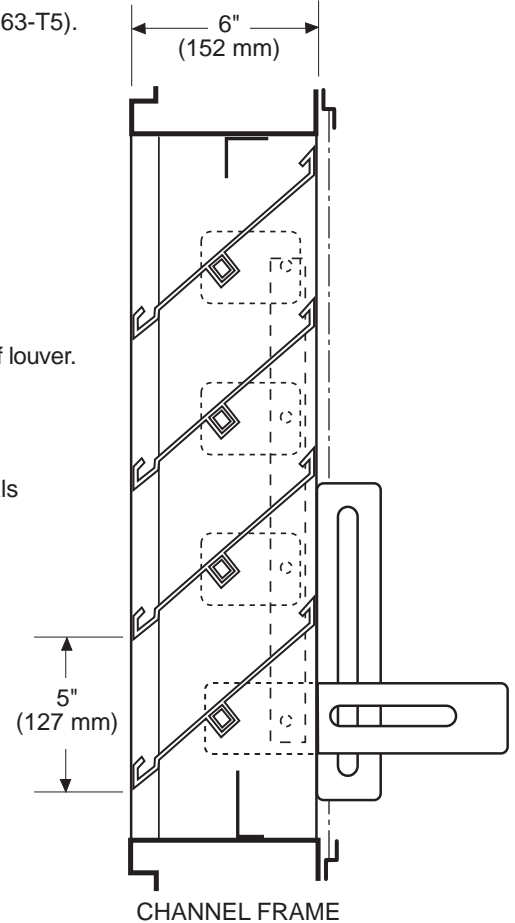

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.

© JULY, 2000 NCA Manufacturing

Project:

Contractor:

Location:

Address:

Architect:

P.O. Number:

Engineer:

Date: