




*MODEL CI-XAD-4
COMBINATION LOUVER INTAKE
DRAINABLE BLADE*

Standard Construction:



Frame:	4" x .081 (101 mm x 2.1 mm) extruded aluminum (6063-T5).
Stationary Blades:	.081 (2.1 mm) extruded aluminum (6063-T5). approximately 3" (76 mm) on centers.
Blade Angle:	37.5°
Backdraft Blade:	.025 (6.4 mm) formed aluminum.
Axles:	3/16" (4.8 mm) dia. nylon.
Blade Seals:	Polyurethane foam.
Screen:	Bird screen - 3/4" x .050 (19 mm x 12.7 mm) flattened expanded aluminum in a removable frame on interior of louver.
Finish:	Mill aluminum.
Size:	Minimum: 12"w x 12"h (25.4 mm x 25.4 mm) Maximum: Single Section - 36"w x 72"h (914 mm x 1828 mm) Multi section - unlimited.

Options:


Screens:	Insect screen - 18 x 16 mesh aluminum. Other: _____
Finish:	Prime Coat. Baked Enamel. Clear Anodize - 204-R1 & 215-R1. Integral Color Anodize Kynar 500 Enamel. Other: _____
Sill Extensions:	
Flange:	1-1/2" (38 mm) (front or rear)

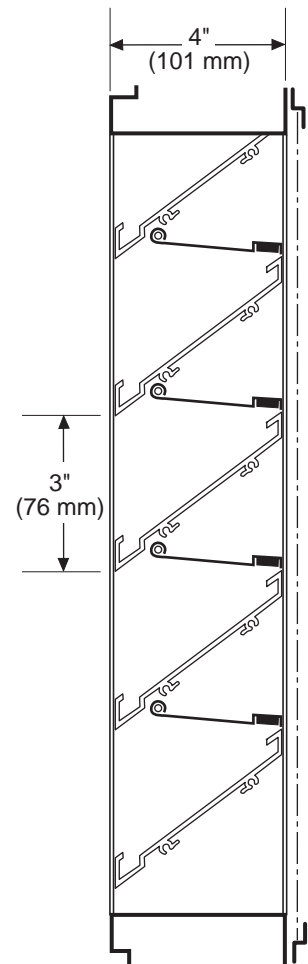

CHANNEL FRAME

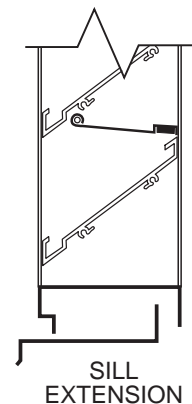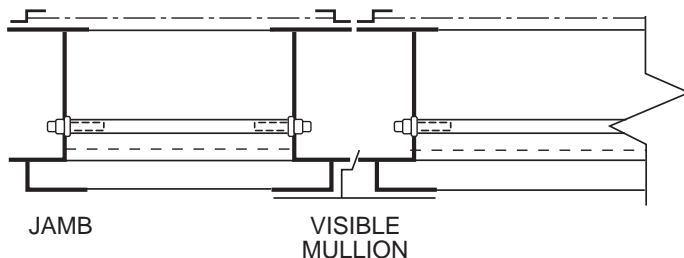

SILL EXTENSION

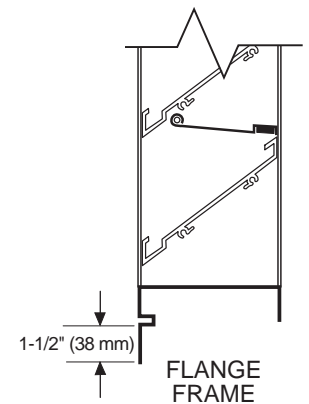

FLANGE FRAME

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.

© JULY, 2000 NCA Manufacturing

Project:

Contractor:

Location:

Address:

Architect:

P.O. Number:

Engineer:

Date: