© 1999 NCA Manufacturing

Design:


The model CIS (insulated) and CNS (non-insulated) straight roof curbs are completely factory assembled ready for installation. These curbs have welded corners and a wide self-flashing flange. This style curb is available in flat, single or double pitch.

Standard Construction:

- 18 ga. galvanized steel
- 1-1/2" fiberglass insulation (CIS)
- Factory installed wood nailer
- 8" high

Options:

- Various materials and gauges
- Damper plate
- Metal liner
- * 4" thick (CNS-4 or CIS-4)
- Single or double pitch

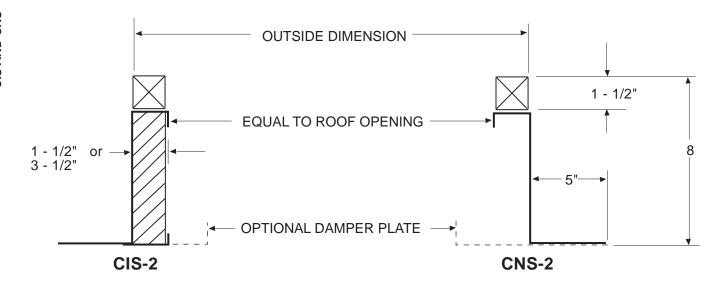

Specifications are correct at time of printing, however as part of our "continuous improvement program" we reserve the right to make further improvements without notice.