META LA IRE


Submittal No: FD-C

Fire Dampers - Type C Galvanized Steel


Options: FD-11-CV Thin Line 2" Frame - Round Inlet / Outlet - Vertical Application

FD-11-CH
Thin Line 2" Frame - Round Inlet / Outlet - Horizontal Application
Standard 4 1/4" Frame - Round Inlet / Outlet - Vertical Application
Standard 4 1/4" Frame - Round Inlet / Outlet - Horizontal Application

Model: FD-11-C (Horizontal or Vertical Application)

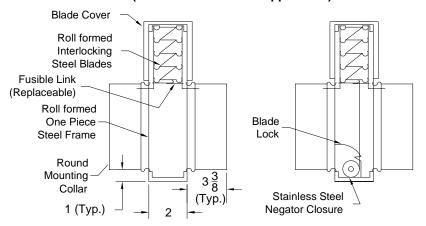


Model: FD-12-C (Horizontal or Vertical Application)

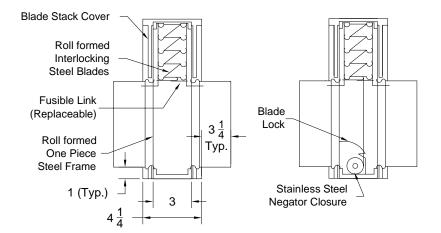

Models	Single Unit Size	Multiple Section Size
FD 11 CV FD 11 CH	Duct Width x Height	Duct Width x Height
Min. Section	4 " DIA	N/A
Max. Section	52" DIA	N/A
Max. Duct Size	52" DIA	N/A

Face View (Both Models)



Models: FD-11-CV and FD-11-CH

* Add to the listed Duct Height for Damper Height

Up to and including 7" Duct Diameter + 2"

Over 7" through 12" Duct Diameter + 3"

Over 12" through 17" Duct Diameter + 4"

Over 17" through 24" Duct Diameter + 5"

Over 24" through 28" Duct Diameter + 6"

Over 28" through 33" Duct Diameter + 7"

Models: FD-12 CV and FD-12-CH

* Add to the listed Duct Diameter for Damper Heigh

Up to and including 5" Duct diameter + 1"

Over 5" through 16" Duct Diameter + 2"

Over 16" through 23" Duct Diameter + 3"

Over 23" through 34" Duct Diameter + 4"

Over 34" through 45" Duct Diameter + 5"

Over 45" through 52" Duct Diameter + 6"

Note: Supplied Only On Units With Duct Height Of 11 Inches And Less

Models	Single Unit Size	Multiple Section Size
FD 12 CV FD 12 CH	Duct Width x Height	Duct Width x Height
Min. Section	4 " DIA	N/A
Max. Section	33" DIA	N/A
Max. Duct Size	33" DIA	N/A

2. Available Options	3. Construction Details
(Factory Mounted)	 Standard Fusible Link is 165°.
Optional Fusible Links.Model FDS Fire Damper Sleeves.	Larger Sizes are not available.
	(Factory Mounted) ☐ Optional Fusible Links.

Notes: (☐ check if provided)

Dimensions are in inches

Cad File Number: FD-C-96 Date: 03/25/2003 Submittal No. FD-C Page: 1 of 1