



MODEL FPH FORMED PENTHOUSE


Standard Construction:

- Available Blade Styles:** All 20 ga. galvanized steel.
"J" Blade - FPHJ - 4 or 6) SLJ-4 or 6)
"Z" Blade - FPHZ - 4 or 6) SLZ-4 or 6)
"D" Blade - FPHD - 4 or 6) SLD-4 or 6)
See specific louver sheets for blade angle and spacing.
- Roof & Post Corners:** 20 ga. galvanized steel.
Screen: Bird screen - 2 mesh x 19 ga. galvanized steel. In a removable frame on interior of louver.
Finish: Mill galvanized.


Options:

- Roof Insulation:** 1/2" (12.7 mm) x 2 lbs. density.
Anticondensate Coating
- Screens:** Insect screen - 18"w x 16"h (457mm x 406 mm) mesh aluminum.
Other: _____
- Finish:** Prime Coat.
Baked enamel.
Kynar 500 Enamel.
Other: _____

Available Blade Styles

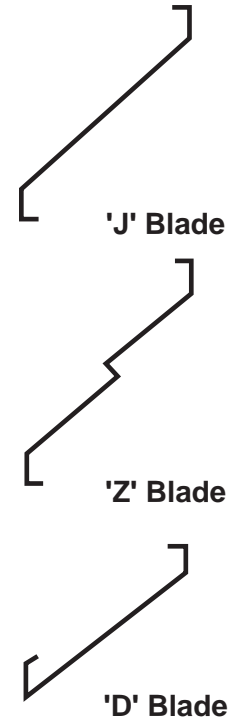

FPH - 02-05

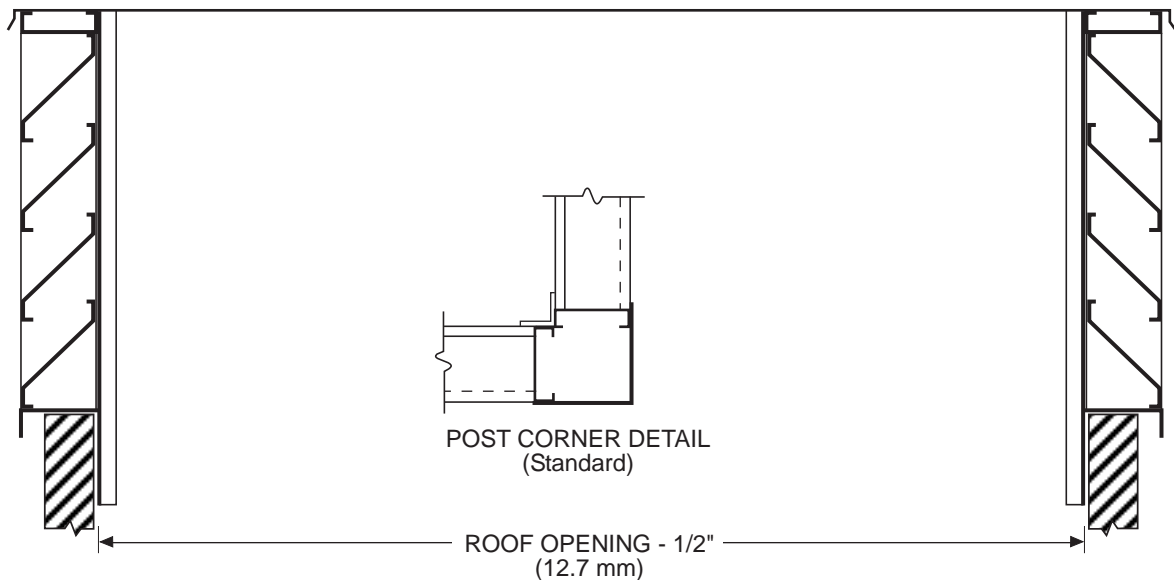

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.

© 1999 NCA Manufacturing

Project:
Location:
Architect:
Engineer:

Contractor:
Address:
P.O. Number:
Date: