



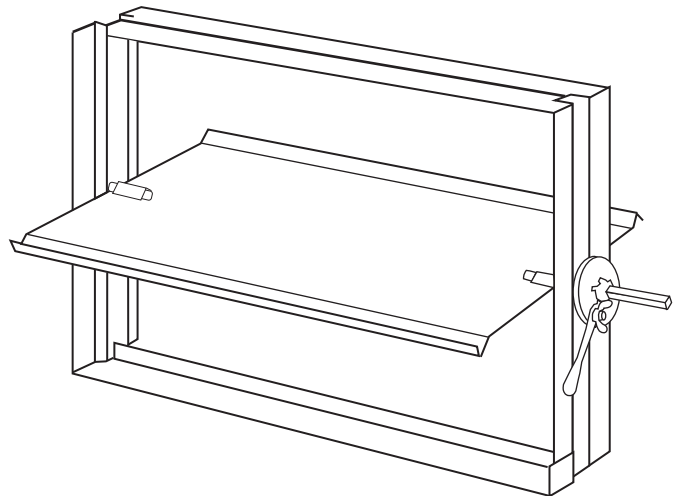

## MODEL PBD-20 BALANCING DAMPER

### Standard Construction:

- Frame:** 18 ga. galvanized steel.  
**Blades:** 18 ga. galvanized steel.  
**Axle:** 1/4" (6.4 mm) square plated steel.  
**Finish:** Mill galvanized.  
**Size:** Minimum - 6" x 4" (152.4 mm x 101.6 mm)  
Maximum - 36" x 12" (914.4 mm x 304.8 mm)  
**Operator:** Locking quadrant.  
**Notes:**
- All dampers are fabricated 1/4" (6.4 mm) under listed size unless otherwise specified "actual or exact".
  - All dampers must be installed with blades running horizontally.
  - Maximum recommended velocity is 1500 PPM.
  - For SMACNA compliance for dampers over 12" (304.8 mm) in height, use PBD-100 or OBD-106.

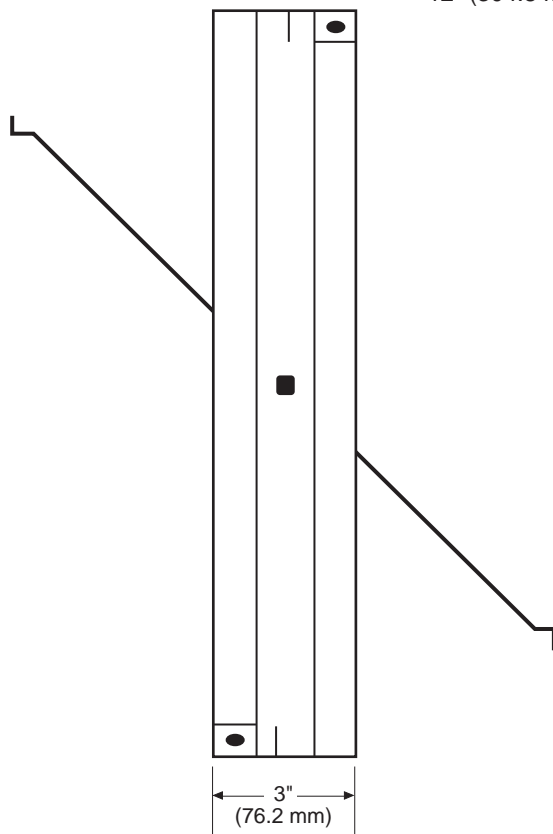

PBD-20 - 02-05

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.

© 1999 NCA Manufacturing

Project:  
Location:  
Architect:  
Engineer:

Contractor:  
Address:  
P.O. Number:  
Date: