



*MODEL SCD-RD-88*  
*STEEL CONTROL DAMPER – ROUND*




**Standard Construction:**

- Frame:** Galvanized steel, rolled reinforcement.  
 DIAMETER GAUGE  
 4" - 8" (102 mm - 204 mm) 22 ga.  
 9" - 12" (229 mm - 305 mm) 20 ga.  
 13" - 24" (330 mm - 610 mm) 18 ga.
- Blades:** Galvanized steel with welded channel reinforcement.
- Bearings:** Bronze Oilite.
- Axles:** 3/8" (9.5 mm) square, plated steel.
- Finish:** Mill galvanized.
- Extended Shaft:** 3/8" (9.5 mm) square, plated steel 4" (102 mm) beyond frame.
- Max. Temperature:** 200°F
- Damper Sizes:** 4" to 24" (102 mm to 610 mm) diameters.

- Notes:**
- Dampers fabricated 1/8" (3.2 mm) smaller than given "duct" dimensions.

**Features**

- The SCD-RD-88 series Control Dampers have been designed and tested to provide a reliable cost effective control damper where tight sealing is not of primary importance. (Note: For tight sealing dampers see Model SCD-RD-LL-88).
- Factory installed electric or pneumatic operators are available when dampers are ordered with motor standoff bracket.

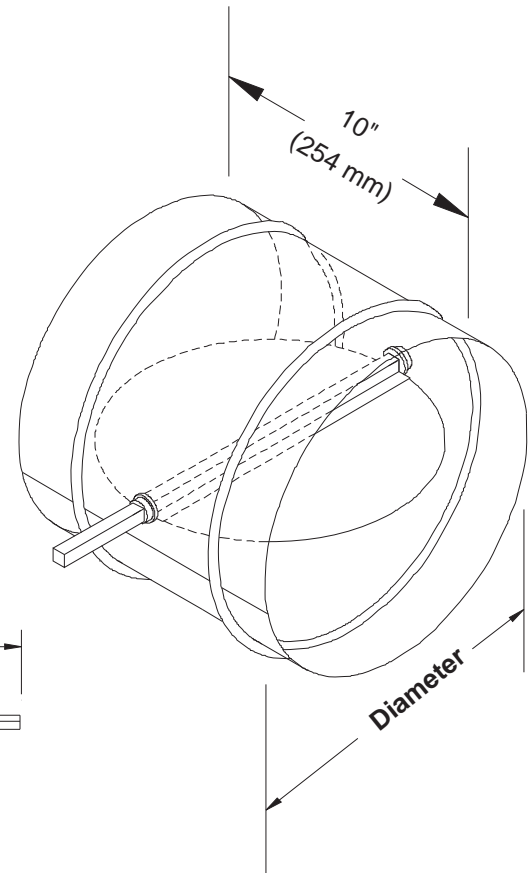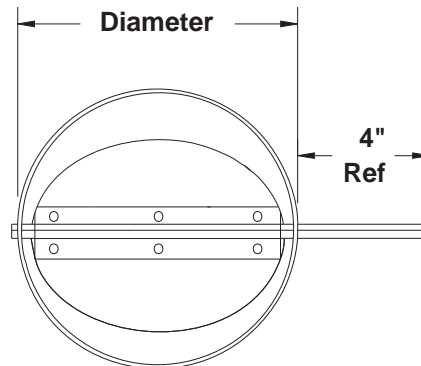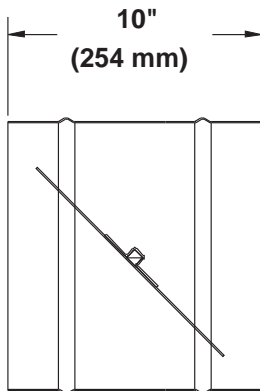

**Suggested Specification**

Round Steel Control Dampers shall be Model: SCD-RD-88 by NCA Manufacturing. Damper frame shall be galvanized steel with rolled reinforcement. Damper blade shall be galvanized steel complete with welded channel reinforcement.

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice. © 1999 NCA Manufacturing

SCDRD88 - 11-04

Project:	Contractor:
Location:	Address:
Architect:	P.O. Number:
Engineer:	Date: