



*MODEL SLV-4*  
*FORMED STATIONARY LOUVER*  
*SIGHTPROOF*

**Standard Construction:**


- Frame:** 4" (101 mm) x 20 ga. galvanized steel.  
**Blades:** 20 ga. galvanized steel,  
 approximately 3-3/4" (83 mm) on centers.  
**Blade Angle:** 60°  
**Screen:** Bird screen - 1/2" x 1/2" (12.7 mm x 12.7 mm) x 19 ga.  
 galvanized steel. In a removable frame on interior of louver.  
**Finish:** Mill galvanized.  
**Minimum Size:** 8"w x 12"h (203 mm x 304 mm)

**Options:**



- Screens:** Insect screen - 18 x 16 mesh aluminum.  
 Other: \_\_\_\_\_  
**Finish:** Prime coat  
 Baked Enamel  
 Kynar 500 Enamel  
 Other: \_\_\_\_\_

**Sill Extensions:**

- Flange:** 1-1/2" (38 mm) (front or rear)  
**Material:** Various materials and gauges  
**Notes:** Louvers fabricated 1/4" (6.4 mm) under  
 opening size unless otherwise noted.

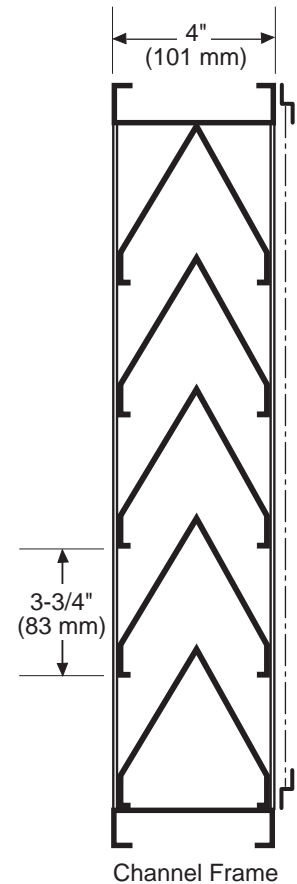

SLV-4 - 02-05

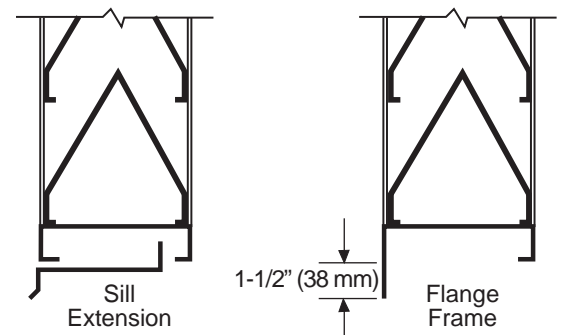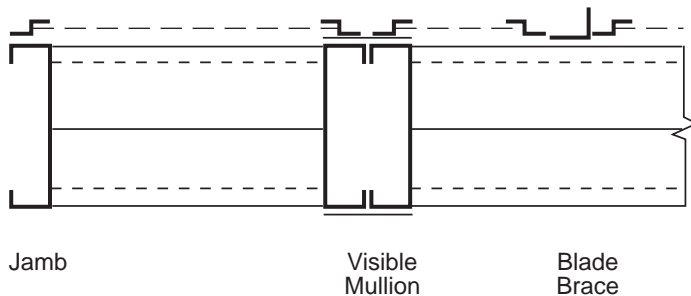

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.

© JULY, 2000 NCA Manufacturing

Project:  
 Location:  
 Architect:  
 Engineer:

Contractor:  
 Address:  
 P.O. Number:  
 Date: