



MODEL XAD-2-45-GL
EXTRUDED STATIONARY LOUVER
DRAINABLE BLADE. AMCA LICENSED.




Standard Construction:

- Frame:** 2" x .063 (50.8 mm x 1.6 mm) extruded aluminum (6063-T5).
- Blades:** .063 (1.6 mm) extruded aluminum (6063-T5), approximately 2-1/4" (57 mm) on centers.
- Blade Angle:** 45°
- Screen:** Bird screen - 3/4" x .050 (19 mm x 12.7 mm) flattened expanded aluminum in a removable frame on interior of louver.
- Finish:** Mill aluminum.
- Minimum Size:** 6"w x 6"h (152 mm x 152 mm)


Options:

- Screens:** Insect screen - 18 x 16 mesh aluminum
 1/2" x .063 (12.7 mm x 1.6 mm) aluminum
 Other - _____
- Finish:** Prime Coat
 Baked Enamel
 Clear Anodize - 204-R1 and 215-R1
 Integral Color Anodize
 Kynar 500 Enamel
 Other - _____
- Sill Extensions:**
- Flange:** 1-1/2" (38 mm) (front or rear)
- Notes:** Louvers fabricated 1/4" (6.4 mm) under opening size unless otherwise noted.

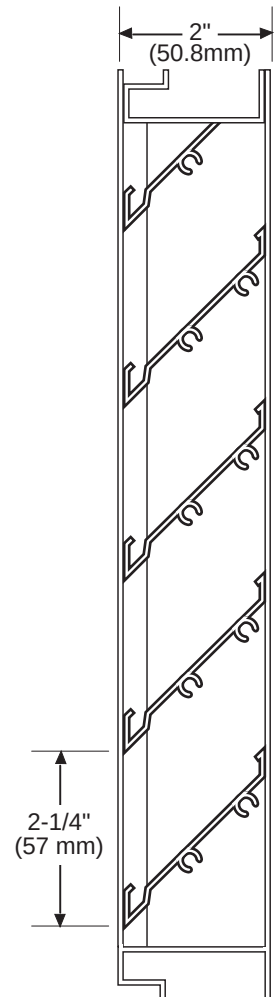


Channel Frame

XAD-2-45-GL - 02-05

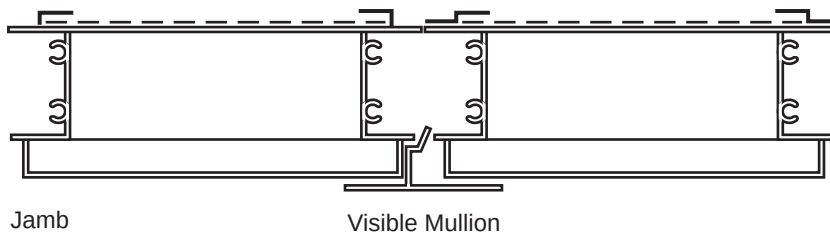


Jamb

Visible Mullion

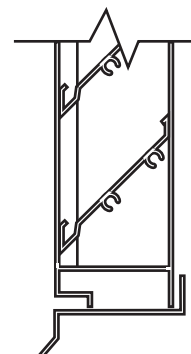

Sill Extension

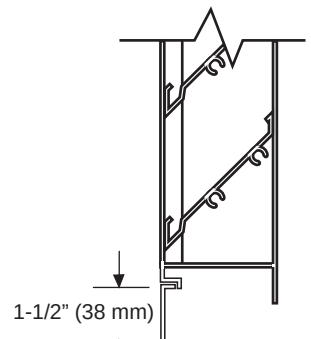

Flange Frame

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.
 © 2002 NCA Manufacturing

Project:
 Location:
 Architect:
 Engineer:

Contractor:
 Address:
 P.O. Number:
 Date:



MODEL XAD-2-45-GL EXTRUDED STATIONARY LOUVER DRAINABLE BLADE. AMCA LICENSED.

PERFORMANCE DATA

© 2002 NCA Manufacturing


Specifications

Furnish and install where shown model XAD-2-45-GL louver, manufactured by NCA Manufacturing. Louvers shall be the stationary drainable type with a frame depth of 2 inches. Frames and blades shall be .063 inches thick 6063-T5 extruded aluminum alloy. Blades shall be located on a 45 degree blade angle. Screens shall consist of 3/4" expanded aluminum, with an extruded frame, mounted to the louver interior, and be removable for cleaning. Louvers shall be finished with Polyurethane Acrylic enamel, Kynar 500, Anodize or other finishes selected by the architect from NCA standard color charts.

XAD-2-45-GL Free Area in Sq. Ft.
Width – Inches


	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96
6	0.06	0.14	0.22	0.31	0.39	0.47	0.56	0.64	0.72	0.81	0.89	0.97	1.06	1.14	1.22	1.31
12	0.13	0.31	0.50	0.69	0.88	1.06	1.25	1.44	1.63	1.81	2.00	2.19	2.38	2.56	2.75	2.94
18	0.23	0.56	0.90	1.24	1.58	1.91	2.25	2.59	2.93	3.26	3.60	3.94	4.28	4.61	4.95	5.29
24	0.29	0.74	1.18	1.62	2.06	2.50	2.95	3.39	3.83	4.27	4.71	5.16	5.60	6.04	6.48	6.92
30	0.40	0.99	1.59	2.18	2.78	3.37	3.97	4.56	5.15	5.75	6.34	6.94	7.53	8.13	8.72	9.32
36	0.47	1.16	1.86	2.56	3.26	3.96	4.66	5.36	6.06	6.75	7.45	8.15	8.85	9.55	10.25	10.95
42	0.54	1.34	2.14	2.94	3.75	4.55	5.35	6.16	6.96	7.76	8.57	9.37	10.17	10.98	11.78	12.58
48	0.64	1.59	2.55	3.50	4.46	5.42	6.37	7.33	8.28	9.24	10.19	11.15	12.10	13.06	14.02	14.97
54	0.71	1.77	2.83	3.89	4.95	6.01	7.07	8.13	9.19	10.25	11.31	12.37	13.43	14.49	15.55	16.61
60	0.78	1.95	3.13	4.30	5.47	6.64	7.81	8.98	10.16	11.33	12.50	13.67	14.84	16.02	17.19	18.36
66	0.88	2.19	3.51	4.83	6.15	7.46	8.78	10.10	11.41	12.73	14.05	15.36	16.68	18.00	19.31	20.63
72	0.95	2.37	3.79	5.21	6.63	8.05	9.48	10.90	12.32	13.74	15.16	16.58	18.00	19.42	20.85	22.27
78	1.05	2.62	4.20	5.77	7.35	8.92	10.49	12.07	13.64	15.22	16.79	18.37	19.94	21.51	23.09	24.66
84	1.12	2.80	4.48	6.15	7.83	9.51	11.19	12.87	14.54	16.22	17.90	19.58	21.26	22.93	24.61	26.29
90	1.19	2.97	4.75	6.53	8.31	10.09	11.88	13.66	15.44	17.22	19.00	20.78	22.56	24.34	26.13	27.91
96	1.29	3.23	5.16	7.10	9.03	10.97	12.90	14.84	16.78	18.71	20.65	22.58	24.52	26.45	28.39	30.32

XAD-2-45-GL - 02-05

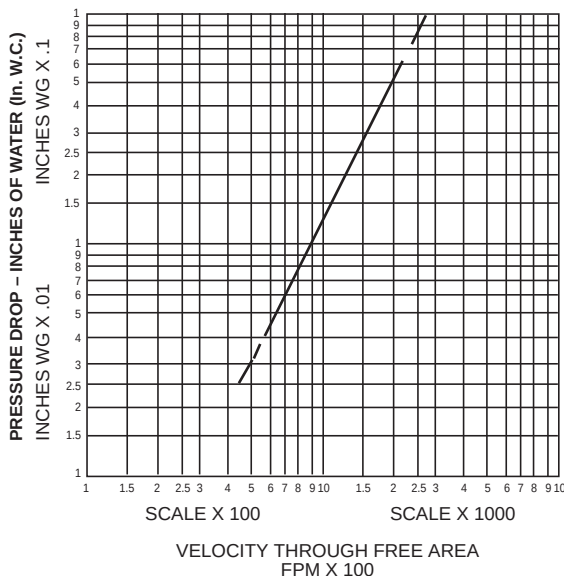

NCA Manufacturing, Inc. certifies that the Model XAD-2-45-GL louver shown herein is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings program.

The AMCA Certified Seal applies to air performance ratings and water penetration ratings.

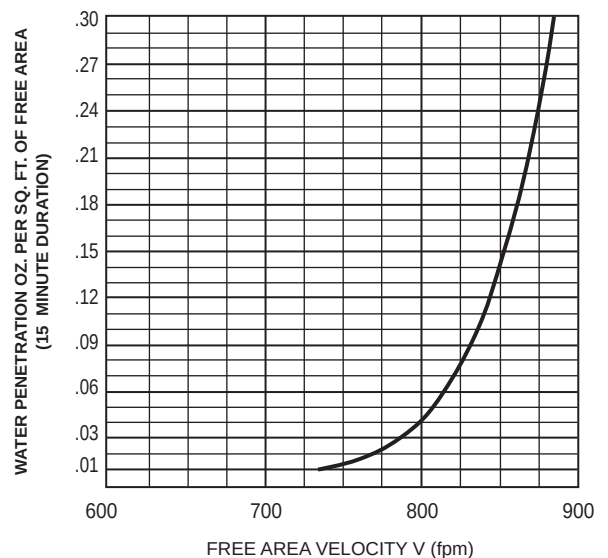

Water Penetration Data applies to test unit size 48" x 48" only. Beginning of Water Penetration is 734 FPM Free Area Velocity.

Performance shown is at standard air density 0.075 lbs./ft³.

November 2002