




MODEL XADV-4 **EXTRUDED STATIONARY LOUVER** **SIGHTPROOF DRAINABLE BLADE**

Standard Construction:




- Frame:** 4" x .081 (101 mm x 2.1 mm) extruded aluminum (6063-T5 alloy).
Blades: .081 (2.1 mm) extruded aluminum (6063-T5 alloy), approx. 3-3/4" (95 mm) on centers.
Blade Angle: 60°
Screen: Bird screen - 3/4" x .050 (19 mm x 12.7 mm) flattened expanded aluminum in a removable frame on interior of louver.
Finish: Mill aluminum.
Minimum Size: 8"w x 12"h (203 mm x 304 mm)

Options:

- Screens:** Insect screen - 18 x 16 mesh aluminum
 Other - _____
Finish: Prime Coat
 Baked Enamel
 Kynar
 Clear Anodize - 204-R1 and 215-R1
 Integral Color Anodize
 Other - _____
Sill Extensions:
Flange: 1-1/2" (38 mm) (front or rear)
Notes: Louvers fabricated 1/4" (6.4 mm) under opening size unless otherwise noted.

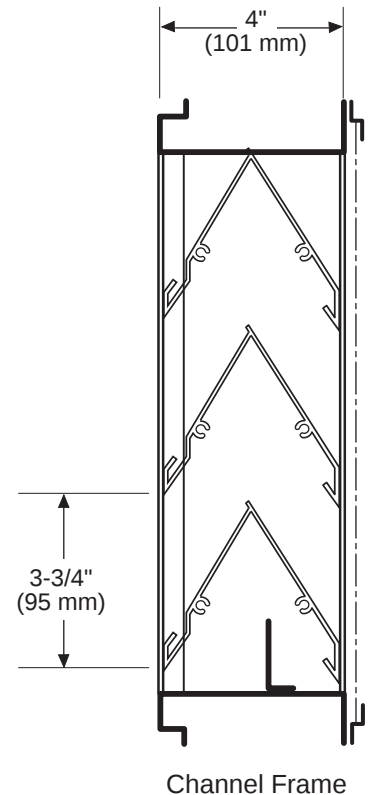

XADV-4 - 02-05

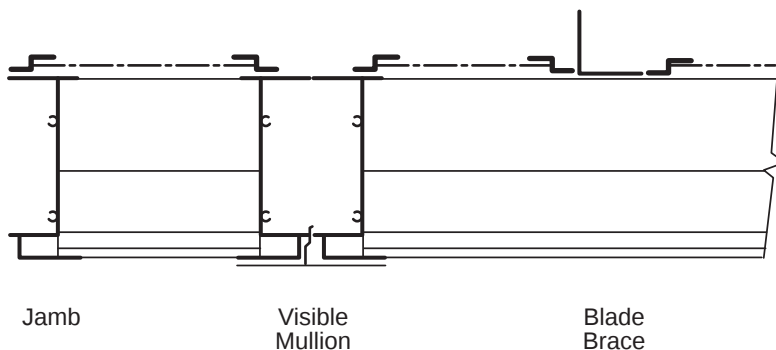

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.

© JULY, 2000 NCA Manufacturing

Project:
 Location:
 Architect:
 Engineer:

Contractor:
 Address:
 P.O. Number:
 Date:



MODEL XADV-4
EXTRUDED STATIONARY LOUVER
SIGHTPROOF DRAINABLE BLADE

PERFORMANCE DATA

© JULY, 2000 NCA Manufacturing

XADV-4 Free Area in Sq. Ft.

		Width – Inches														
		12	18	24	30	36	42	48	54	60	66	72	78	84	90	96
Height – Inches	12	.18	.30	.42	.54	.67	.79	.91	1.03	1.15	1.28	1.40	1.52	1.64	1.76	1.88
	18	.31	.52	.73	.94	1.16	1.37	1.58	1.79	2.00	2.21	2.43	2.64	2.85	3.06	3.27
	24	.44	.75	1.05	1.36	1.66	1.97	2.27	2.58	2.88	3.19	3.49	3.80	4.10	4.41	4.71
	30	.62	1.05	1.47	1.90	2.32	2.75	3.18	3.60	4.03	4.45	4.88	5.31	5.73	6.16	6.58
	36	.71	1.20	1.69	2.17	2.66	3.15	3.64	4.12	4.61	5.10	5.59	6.08	6.56	7.05	7.54
	42	.89	1.50	2.11	2.72	3.33	3.94	4.55	5.16	5.77	6.38	6.98	7.59	8.20	8.81	9.42
	48	1.02	1.72	2.42	3.12	3.82	4.52	5.22	5.92	6.62	7.32	8.01	8.71	9.41	10.11	10.81
	54	1.16	1.95	2.74	3.53	4.33	5.12	5.91	6.70	7.50	8.29	9.08	9.87	10.67	11.46	12.25
	60	1.33	2.25	3.16	4.07	4.99	5.90	6.81	7.73	8.64	9.55	10.47	11.38	12.30	13.21	14.12
	66	1.42	2.40	3.37	4.35	5.32	6.30	7.27	8.25	9.23	10.20	11.18	12.15	13.13	14.10	15.08
	72	1.60	2.70	3.79	4.89	5.99	7.09	8.18	9.28	10.38	11.48	12.57	13.67	14.77	15.86	16.96
	78	1.73	2.92	4.11	5.29	6.48	7.67	8.85	10.04	11.23	12.42	13.60	14.79	15.98	17.16	18.35
	84	1.87	3.15	4.43	5.71	6.99	8.27	9.55	10.83	12.11	13.39	14.67	15.95	17.23	18.51	19.79
	90	2.04	3.44	4.85	6.25	7.65	9.05	10.45	11.85	13.25	14.65	16.06	17.46	18.86	20.26	21.66
	96	2.13	3.60	5.06	6.52	7.99	9.45	10.91	12.37	13.84	15.30	16.76	18.23	19.69	21.15	22.62