



GEM – SOL SOLENOID 24 Volt 60Hertz

CAT NUMBER 246 508 20

General Description

The GEM – SOL coil ,including its magnetic circuit ,is encapsulated in a high temperature resistant nylon to withstand humidity and for heavy duty requirements.

Technical Specifications

Coil winding insulations H 180 °

Pressure 16 Bar (235 PSI)

Temp. Range -20 ° C to 50 C ° (-4 F to 122 F)

Assembly :at any position

Fixing : One nut 1/4" hexagonal 19 mm (3/4 Inch).


Power Consumption:8 W

Inrush 26VA-13W

Holding 16VA-8W

Operator :Stainless Steel

BAKARA SOLENOID VALVE

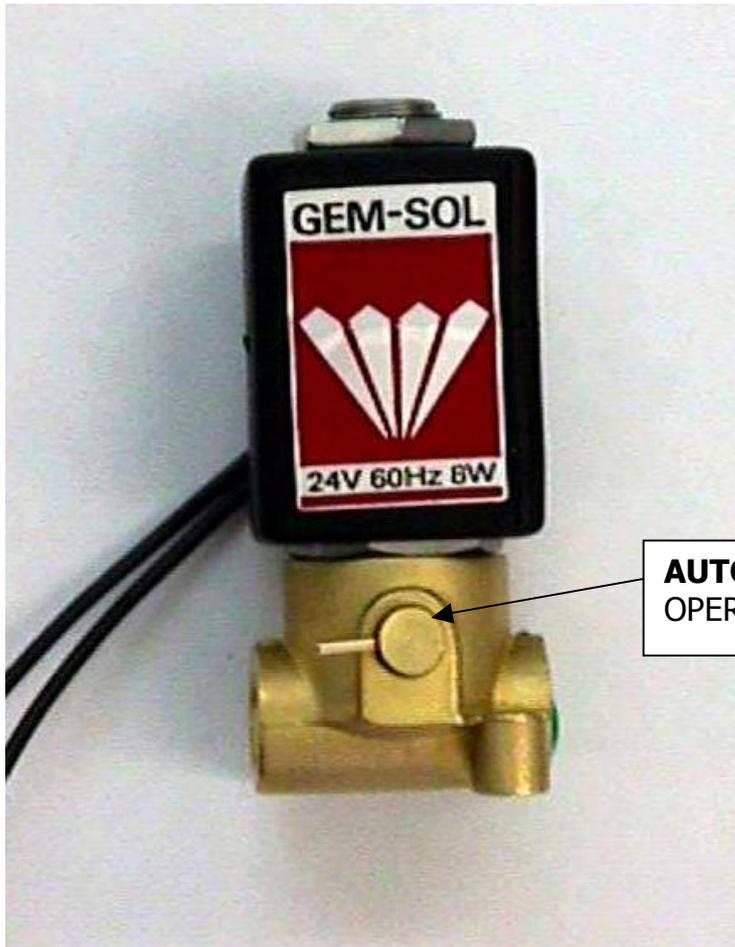

AUTOMATIC POSITION
OPERATED BY THE CONTROLLER



MANUAL OVERRIDE
"OPEN"

