

# NEOPRENE FACED PHENOLIC MYLAR

## *SUBMITTAL SPECIFICATIONS*

### NEOPRENE FACED PHENOLIC GASKET

DIELECTRIC VOLTS/MIL ASTM D149	COMPRESSIVE STRENGTH (PSI) ASTM D695	WATER ABSORPTION ASTM D229	HARDNESS ROCKWELL "M" ASTM D785	TENSILE (PSI) ASTM D638	SHEAR (PSI) ASTM D732	OPERATING TEMP (MAX)
500	25,000	1.6	85	20,000	18,000	175°F

### MYLAR SLEEVE MATERIAL PROPERTIES

4000	N/A	0.8	N/A	N/A	N/A	300°F
------	-----	-----	-----	-----	-----	-------

### PHENOLIC 1/8" WASHER PROPERTIES

550	50,000	0.10	N/A	N/A	N/A	250°F
-----	--------	------	-----	-----	-----	-------

### BACK UP WASHERS

<input type="checkbox"/> (2) STEEL PLATED	<input type="checkbox"/> (2) F436 HARDENED STEEL	<input type="checkbox"/> (2) T-316 STAINLESS STEEL
---	--	--


MATERIALS FOR FLANGE INSULATING KITS ON PIPES CONTAINING WATER AND NATURAL GAS (UP TO 221°F, 105°C) SHALL CONSIST OF THE FOLLOWING COMPONENTS.

***INSULATING GASKET:*** NEOPRENE FACED PHENOLIC GASKETS HAVE BEEN USED PRIMARILY IN THE WATER, OIL AND GAS INDUSTRIES FOR MANY YEARS. SOFT NEOPRENE RUBBER SHEETS ARE FACTORY APPLIED TO BOTH SIDES OF A LAMINATED PHENOLIC RETAINER PROVIDING AN EFFECTIVE SEALING SURFACE.

***FULL LENGTH INSULATING SLEEVES:*** MADE OF 1/32" WALL THICKNESS MYLAR TUBING. ONE FULL LENGTH MYLAR SLEEVE (EXTENDING HALF WAY INTO BOTH STEEL WASHERS) FOR EACH FLANGE BOLT. 1/16" WALL THICKNESS MYLAR TUBING AVAILABLE UPON REQUEST.

***WASHERS:*** THE I.D. OF ALL WASHERS SHALL FIT OVER THE INSULATING SLEEVE AND BOTH THE STEEL AND INSULATING WASHER SHALL HAVE A SAME I.D. AND O.D.

FLANGE INSULATING KITS ARE MANUFACTURED BY  
***PIPELINE SEAL AND INSULATOR, INC*** HOUSTON, TEXAS  
FACILITY THAT HAS A REGISTERED ISO 9001:200  
QUALITY MANAGEMENT SYSTEM. STOCKED AND DISTRIBUTED  
BY ***TRIPAC*** IN THE CORONA, CALIFORNIA WAREHOUSE.

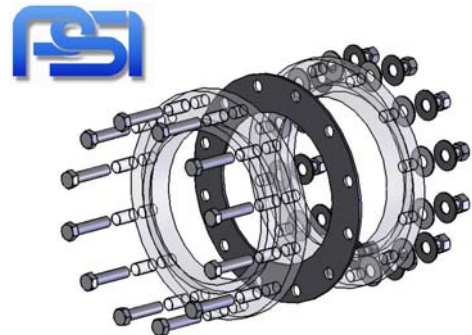

***TRIPAC***

*A DIVISION OF TRIPAC MARKETING, INC.*

475 KLUG CIRCLE • CORONA, CA 92880-6406  
(951) 280-4488 • Fax: (951) 272-4445