

ADJUSTABLE ON-GRADE CLEANOUT

834 series

Finish Line™

SPECIFICATION

Sioux Chief 834 series Finish Line adjustable on-grade cleanout shall be used where necessary in drainage systems. Cleanout shall allow adjustment of 1.25" before the concrete pour, and 1.25" after the concrete pour. Cleanout shall have a no-hub connection. Cleanout cover shall meet applicable load requirements for intended use. Cleanout shall include a 3.5" slotted, polypropylene cleanout plug, situated in base adapter. Designed in accordance with ASME A112.36.2M-02

MATERIALS

ring/cover: 304 stainless steel
head adapter: 304 stainless steel
coring sleeve: 304 stainless steel
coring plug: high impact polymer
cleanout plug: slotted polypropylene
base adapter: 304 stainless steel

COVER LOAD RATING

4,000 lbs. (medium duty)


DIMENSIONS

A: connection size 3" or 4" no-hub
B: ring/cover diameter
 round: 6½"
 square: 6¾"
C: base adapter height 4½"
D: pre-pour adjustable height 5⅜" — 6⅝"
E: post-pour adjustable height
 round: 0" — 1½"
 square: ⅝" — 1½"
F: cleanout plug 3½" MIP thread

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____



834-4SSR

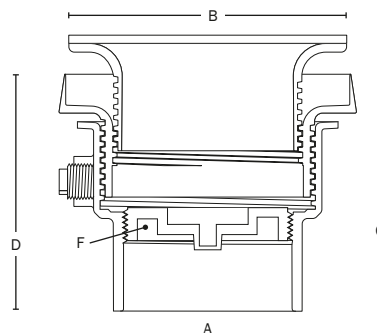

Create Item Number

834-ABC

e.g. 834-4SSR = Finish Line cleanout with 4" no-hub connection, and stainless steel ring & cover

<u>A</u>	CONNECTION SIZE	<u>B</u>	RING/COVER	<u>C</u>	OPTIONS
☐ 3S	3" no-hub	☐ SR	round stainless steel	☐ V	Vandal-resistant cover screws
☐ 4S	4" no-hub	☐ SQ	square stainless steel		

ACCESSORIES

- ☐ 832-S4 leveling shim kit
- ☐ 832-W locating bristles kit