

ADJUSTABLE CLEANOUT

852 series

SPECIFICATION

Sioux Chief 852 Series adjustable cleanout shall be used where necessary in drainage systems. Cleanout shall allow adjustment before the concrete pour. Cleanout shall have a Sch. 40 hub connection, which conforms to ASTM D2665 (PVC) or D2661 (ABS). Connection to drainage system shall be made with a solvent weld joint to ABS/PVC pipe. Cleanout cover shall meet applicable load requirements for intended use. Cleanout shall include a 3½" slotted, polypropylene cleanout plug, situated in base adapter.

MATERIALS

ring/cover: nickel-bronze, 304 stainless steel, ductile iron, tenz alloy, or brass

head adapter: ABS

base adapter: ABS or PVC

cleanout plug: slotted polypropylene

COVER LOAD RATING

nickel-bronze: 4,000 lbs. (medium duty)

stainless steel: 4,000 lbs. (medium duty)

ductile iron: 5,000 lbs. (heavy duty)

brass: 4,000 lbs. (medium duty)

tenz alloy: 1,250 lbs. (light duty)

DIMENSIONS

A: connection size 3" or 4" Sch. 40 hub

B: ring/cover diameter

round: 6½"

square: 6⅞"

C: adapter height

3" hub 4⅜"

4" hub 4⅝"

D: pre-pour adjustable height

3" hub 5⅛" — 6¼"


4" hub 5⅜" — 6½"

E: cleanout plug: 3½" MIP thread

Item # Submitted _____
Job Name _____
Location _____
Engineer _____
Contractor _____
PO# _____ TAG _____



852-4PNR

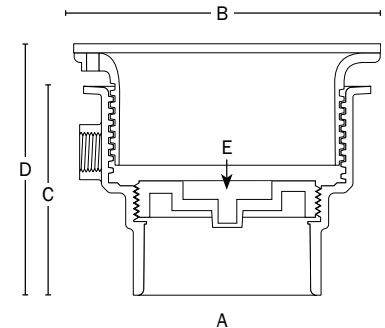

Create Item Number

852- A B C D

e.g. 852-4PSRV = 4" PVC hub cleanout with round stainless steel cover and vandal-resistant screws

A CONNECTION SIZE

- ☐ 3 3" Sch. 40 hub
☐ 4 4" Sch. 40 hub

B CONNECTION TYPE

- ☐ A ABS base adapter
☐ P PVC base adapter

C RING & COVER

- ☐ NR round nickel-bronze
☐ NQ square nickel-bronze
☐ SR round stainless steel
☐ SQ square stainless steel
☐ i round ductile iron
☐ BR round brass
☐ BQ square brass
☐ TR round tenz alloy

D OPTIONS (FACTORY INSTALLED)

- ☐ V vandal-resistant cover screws
☐ S stamped cover, specify letters ¹
☐ Z complies with the Buy American Act ²
☐ C carpet marker

¹ NOT available with ductile iron covers

² only available on cleanouts with round nickel covers