

# SHOWER MODULE DRAIN

## 825 series

### SPECIFICATION

Sioux Chief 825 series shower module drain shall be used where necessary in drainage systems. Shower drain shall have a two-piece, receptor base design with ABS or PVC Sch. 40 hub connection. Strainer shall meet all applicable load and flow requirements for intended use. Designed in accordance with ASME A112.18.2-2005 / CSA B125.2-05

### MATERIALS

male thread top: ABS

female thread body: ABS, PVC

gaskets: rubber, polyethylene

strainer: 430 stainless steel

### STRAINER LOAD RATING

300 lbs. (light duty, pedestrian traffic)

### STRAINER FREE AREA


3.25 in<sup>2</sup> (7.02 GPM)\*

### DIMENSIONS

A: connection size	1½" hub × 2" spgt or 2" Sch. 40 hub
B: strainer diameter	4¼"
C: screw centers	2⅝"
D: overall height	2⅝" (fully collapsed)

\* Indicates flow rate of the strainer (not necessarily of the fixture) at ¼" head.

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____

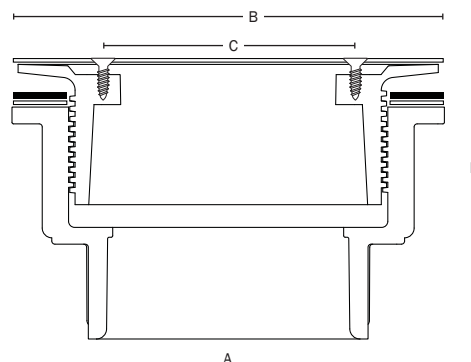

Create Item Number

**825-ABCD**

e.g. 825-20P = 2" Sch. 40 hub connection PVC shower module drain with screw-on strainer and brass inserts

**A CONNECTION SIZE**

- ☐ 1 1½" Sch. 40 hub x 2" Spgt  
☐ 2 2" Sch. 40 hub

**B STRAINER TYPE<sup>1</sup>**

(skip if using screw-on strainer)

- ☐ 7 Snap-in strainer

1 screw-on strainer is standard unless otherwise specified

**C THREADED SCREW INSERTS<sup>2</sup>**

(skip if using snap-in strainer)

- ☐ 0 threaded brass screw inserts

2 NO inserts is standard unless otherwise specified

**D CONNECTION TYPE**

- ☐ A ABS  
☐ P PVC