

GASKETED CLOSET FLANGE

887 series

SPECIFICATION

Installed closet flanges shall be Sioux Chief 887 series Push-Tite closet flange. Flange ring shall be full-swivel, corrosion-proof stainless steel, with sufficient holes for securing to floor and slots for inserting closet bolts. Flange throat shall be at least 3.5" in diameter for complete flow-through and clog resistance. Flange gasket shall seal inside any 4" nominal DWV piping, and safely hold head pressures up to 15 PSI.

MATERIALS

FLANGE BODY: White or black ABS

FLANGE RING: 18 gauge 400 series stainless steel

GASKET: Engineered elastomer, chemical/heat resistant

INSTALLATION

Flush-to-floor. Gasket seals inside any 4" DWV pipe:

Solid and foam core ABS/PVC

No-hub, service weight, and extra-heavy cast iron

Copper DWV

Lead pipe

Lubricate gasket before insertion.

Solvent welds over 3" Sch. 40 ABS/PVC.

Item Number
Submitted: _____

Push-Tite™





887-GPM



887-GPTM

DIMENSIONS

A: Overall height	2.8"
B: Flange ring diameter	7.025"
C: Screw centers	6.125"
D: Closet bolt centers	6.125"
E: Top flange opening	4.06"
F: Ring thickness	0.375"
G: Ring cavity	0.637"
H: Flange tailpiece I.D.	3.514"
I: Flange tailpiece O.D.	3.88"
J: Flange tailpiece height	2.425"
K: Gasket height	0.55"

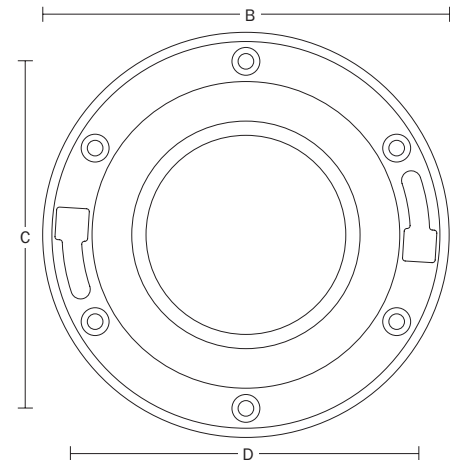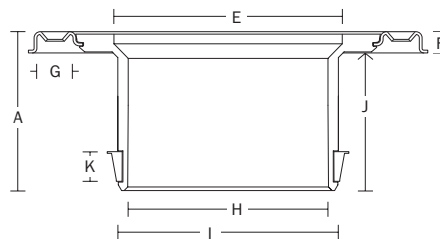

Create Item Number Below

- ☐ **887-GPM** White for PVC 4" × 4" Inside-fit closet flange
- ☐ **887-GPTM** White for PVC 4" × 4" Inside-fit closet flange with TKO knockout
- ☐ **887-GAM** Black for ABS 4" × 4" Inside-fit closet flange
- ☐ **887-GATM** Black for ABS 4" × 4" Inside-fit closet flange with TKO knockout