

Efficiency Series

#### Model

# ST-2000-1.28

Vitreous China Water Closet

### DESCRIPTION

Complete vitreous china water closet.

#### Flush Cycle

Model ST-2000-1.28 (1.28 gpf/4.8 Lpf)





### **SPECIFICATIONS**

### Water Closet


- · Vitreous china
- · Floor mounted
- · Siphon jet flushing action
- 1.5" I.P.S. top spud inlet
- · 2" trapway diameter
- · Fully glazed trapway
- · Toilet seat not included
- · Integral flushing rim
- Elongated bowl
- Water spot area 9 1/2" x 7 3/8"
- · Closet bolts and caps included
- ASME A112.19.2/CSA B45.1


#### Colors/Finishes

White

### Recommended Accessories

- · Compatible with toilet seat models:
- Olsonite 10CT
- Bemis 1955 CT
- · Church Commercial 295CT






## **Product Specification**

Elongated water closet shall be made of vitreous china with a 1.5" top spud. Water Closet shall use 1.28 gpf / 4.8 Lpf. Water Closet shall be floor mounted. Water Closet shall be Sloan Model ST-2000-1.28

NOTE: Plumbing System Requirements √ Minimum Flowing Pressure: 25 PSI √ Minimum Flow Rate: 18 GPM

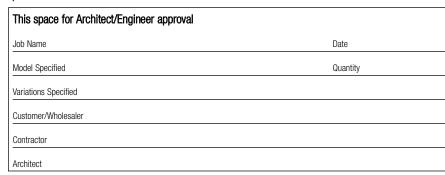



electricity use at its Franklin Park, Illinois facility.

Sloan Valve Company 10500 Seymour Avenue, Franklin Park, IL 60131

Phone: 1-800-9-VALVE-9 (982-5839)

or 1-847-671-4300

Fax: 1-800-447-8329 or 1-847-671-4380

www.sloanvalve.com

Copyright © 2009 Sloan Valve Company 08/09 Rev. 0