



Efficiency Series

Model

ST-2022-1.6/1.1

ADA Compliant Dual Flush Vitreous China Water Closet

DESCRIPTION

Complete ADA Compliant Dual Flush Floor Mounted Vitreous China Water Closet.

Flush Cycle

Model ST-2022 Dual Flush

Full Flush 1.6 gpf/6.0 Lpf

Reduced Flush 1.1 gpf/4.2 Lpf



SPECIFICATIONS

Water Closet


- ADA Compliant
- Vitreous China
- Dual Flush
- Floor Mounted
- Siphon Jet Flushing Action
- 1.5" I.P.S. Top Spud Inlet
- 2" Trapway Diameter
- Fully Glazed Trapway
- Toilet Seat Not Included
- Integral Flushing Rim
- Elongated Bowl
- Water Spot Area 10" x 7 1/2"
- Closet Bolts and Caps Included
- ASME A112.19.2/CSA B45.1

Colors/Finishes

- White

Recommended Accessories

- Compatible with Toilet Seat models:
 - Olsonite 10CT
 - Bemis 1955 CT
 - Church Commercial 295CT

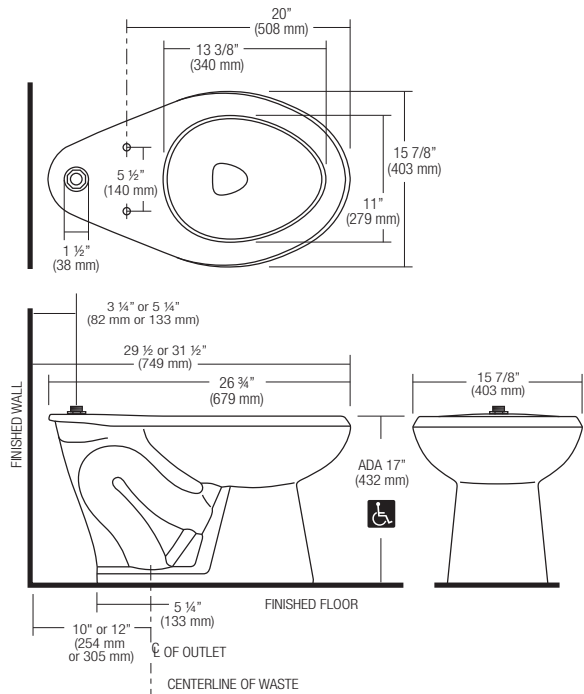

Product Specification

Elongated dual flush water closet shall be made of vitreous china with a 1.5" top spud. Bowl shall be ADA compliant when installed at required height of 17" from floor to top of fixture. Water closet shall be floor mounted. Water Closet shall use 1.6/1.1 gpf. Water Closet shall be Sloan Model ST-2022-1.6/1.1.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.



NOTE:

Plumbing System Requirements

✓ Minimum **Flowing** Pressure: 25 PSI

✓ Minimum Flow Rate: 18 GPM

This space for Architect/Engineer approval	
Job Name	Date
Model Specified	Quantity
Variations Specified	
Customer/Wholesaler	
Contractor	
Architect	

The information contained in this document is subject to change without notice.



Sloan Valve Company is buying renewable energy certificates to meet 100% of the company's purchased electricity use at its Franklin Park, Illinois facility.



Sloan Valve Company
10500 Seymour Avenue,
Franklin Park, IL 60131
Phone: 1-800-9-VALVE-9 (982-5839)
or 1-847-671-4300
Fax: 1-800-447-8329 or 1-847-671-4380
www.sloanvalve.com

Copyright © 2009 Sloan Valve Company
08/09 Rev. 0