



Efficiency Series

Model

## ST-2050-1.28

Vitreous China Water Closet

### DESCRIPTION

Complete vitreous china water closet.

#### Flush Cycle

Model ST-2050-1.28 (1.28 gpf/4.8 Lpf)



### SPECIFICATIONS

#### Water Closet



- Wall hung vitreous china elongated bowl
- Siphon jet flushing action
- 1.5" I.P.S. top spud inlet
- 2" fully glazed trapway diameter
- Mounting hardware, carrier and toilet seat not included
- Integral flushing rim
- Water spot area 9 1/2" x 8 1/4"
- ASME A112.19.2/CSA B45.1

#### Colors/Finishes

- White

#### Recommended Accessories

- Compatible with toilet seat models:
  - Olsonite 10CT
  - Bemis 1955 CT
  - Church Commercial 295CT

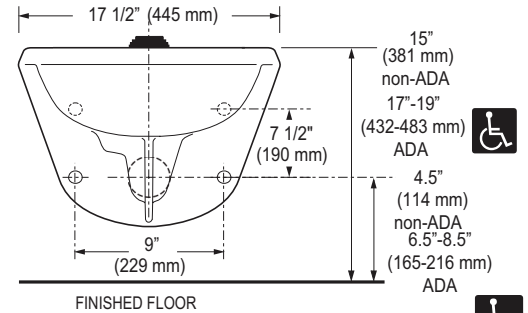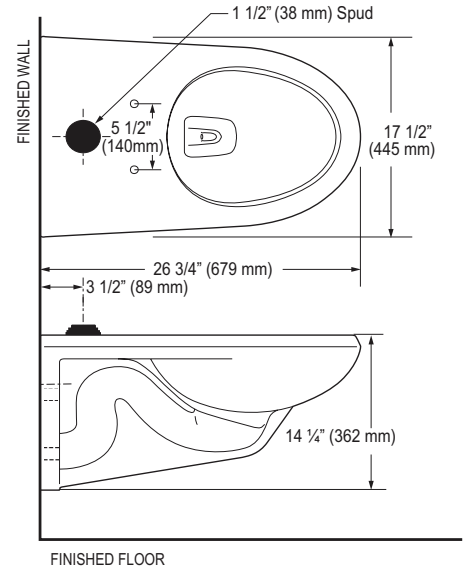

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.



#### NOTE: Plumbing System Requirements

✓ Minimum **Flowing** Pressure: 25 PSI

✓ Minimum Flow Rate: 18 GPM

#### Product Specification

Elongated water closet shall be made of vitreous china with a 1.5" top spud inlet. Bowl shall be ADA compliant when installed at required height of 17" - 19" from floor to top of fixture. Water Closet shall use 1.28 gpf / 4.8 Lpf. Water Closet shall be Sloan Model ST-2050-1.28.



Sloan Valve Company is buying renewable energy certificates to meet 100% of the company's purchased electricity use at its Franklin Park, Illinois facility.

# SLOAN®

Sloan Valve Company  
10500 Seymour Avenue,  
Franklin Park, IL 60131  
Phone: 1-800-9-VALVE-9 (982-5839)  
or 1-847-671-4300  
Fax: 1-800-447-8329 or 1-847-671-4380  
www.sloanvalve.com

Copyright © 2009 Sloan Valve Company  
Printed in the U.S.A. Rev. 0a (09/09)

#### This space for Architect/Engineer approval

Job Name	Date
Model Specified	Quantity
Variations Specified	
Customer/Wholesaler	
Contractor	
Architect	

The information contained in this document is subject to change without notice.