

Features


- Compression molded from our exclusive solid Vikrell® material
- Modular 4-piece design
- Caulkless seam installation
- Pivot "snap together" installation
- Convenient shelves provide generous storage
- Durable high-gloss finish
- 10-year consumer/3-year commercial limited warranty
- Wall surround allows for attachment of grab bars
- 48-1/4" (1226 mm) x 37-1/4" (946 mm) x 77" (1956 mm) rough-in dimensions include nailing flange
- 48" (1219 mm) x 36" (914 mm) x 75-3/4" (1924 mm) complete unit finished dimensions

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124

48" (1219 mm) BASE AND SURROUND W/BACKER BOARDS 72260106

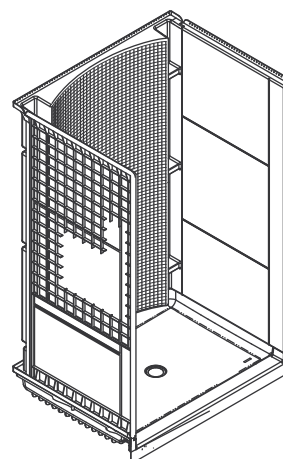

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
72260106	48" (1219 mm) shower base and wall surround with backer boards	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Model	Wall Component Description	Colors/Finishes	
72262106	48" (1219 mm) Backwall	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
72261100	48" (1219 mm) Base	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
72245106	Endwall set with backer boards	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Technical Information

Model	door maximum width	door maximum height
72260106	44-5/8" (1133 mm)	72" (1829 mm)

Double studding is recommended for pivot shower door installations.


Studs should be positioned roughly as shown.

Base cannot be installed without the wall surround.

Installation Notes

Install this product according to the installation guide.

Size the drain cutout to fit the drain assembly that will be used.

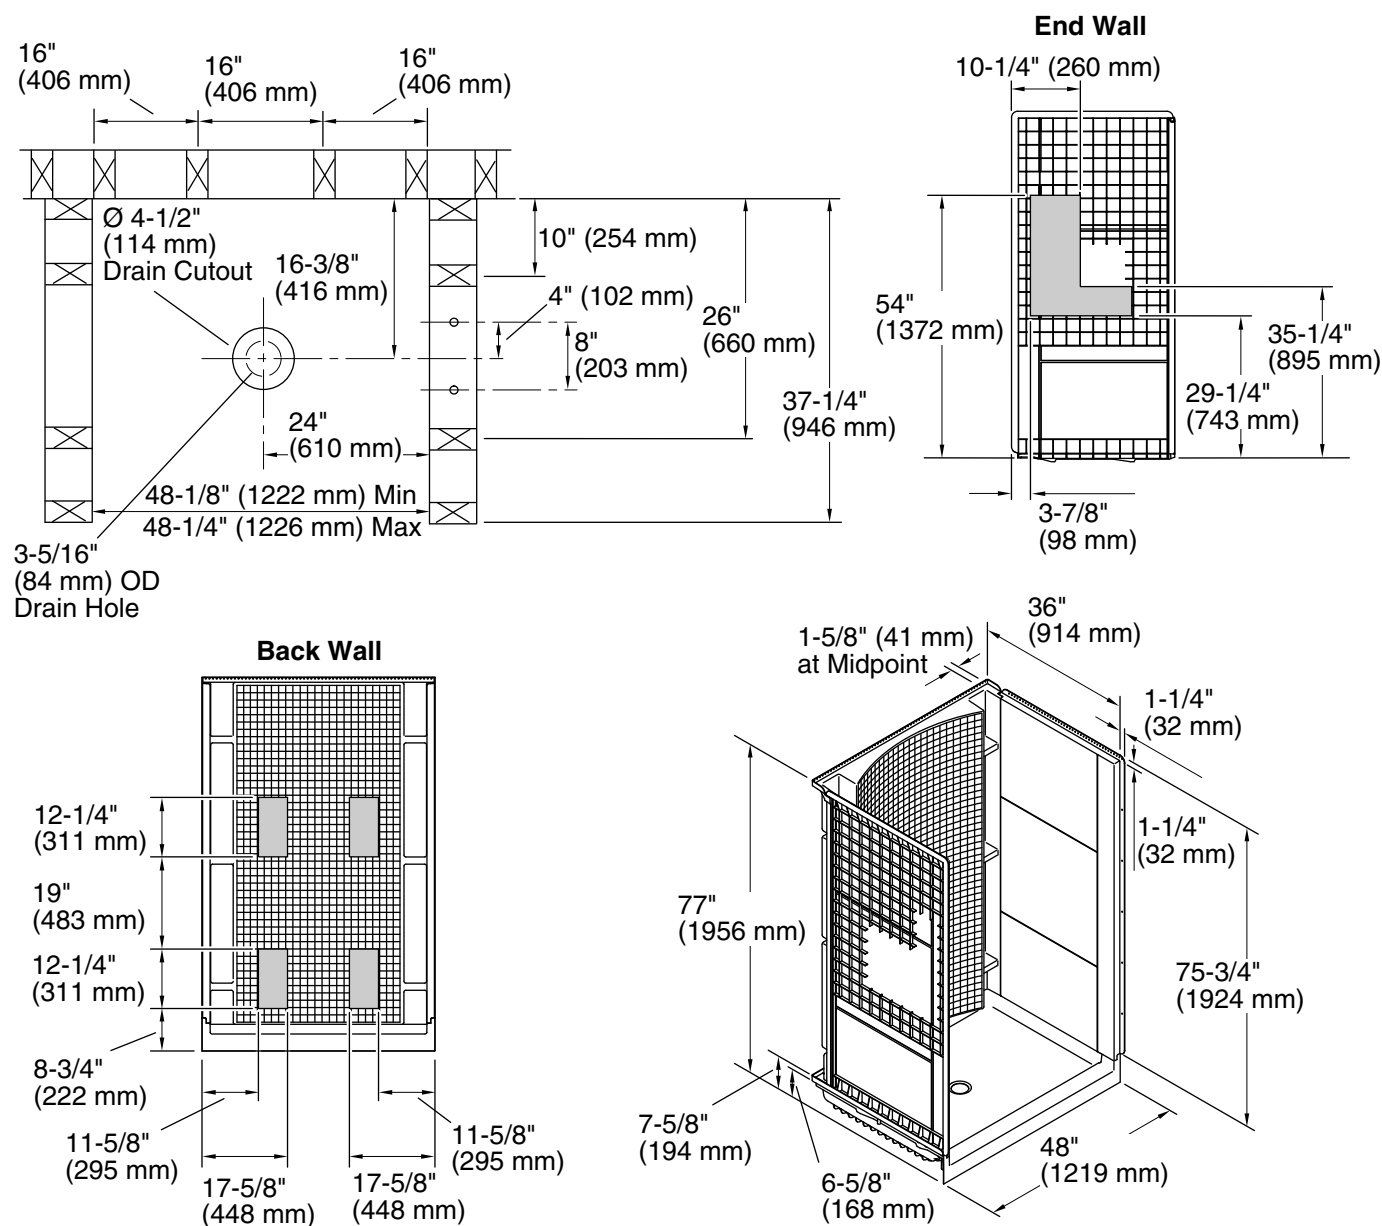

Product Diagram

ACCORD® 48" (1219 mm) BASE AND SURROUND W/BACKER BOARDS