


Features

- Compression molded from our exclusive solid Vikrell® material
- Modular 4-piece design
- Pivot "snap together" installation
- Caulkless seam installation
- Pre-attached grab bars constructed from anodized aluminum
- Convenient shelves provide generous storage
- Durable, chemical-resistant removable seat
- Removable seat can be conveniently placed on either side of receptor
- Not recommended as a receptor only installation
- 10-year consumer/3-year commercial limited warranty
- 48-1/8" (122.2 cm) x 37-1/4" (94.6 cm) x 76" (193 cm) rough-in dimensions include nailing flange
- 48" (121.9 cm) x 36" (91.4 cm) x 74-1/2" (189.2 cm) complete unit finished dimensions

48" (121.9 cm) SEATED RECEPTOR AND SURROUND WITH GRAB BARS 72280103

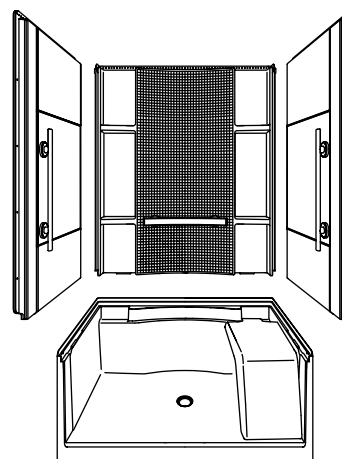

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- CSA B45.0
- CSA B45.5
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- N: Nickel
- V: Matte Silver
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Grab Bar Finishes			Fixture Colors	
72280103	48" (121.9 cm) seated receptor and surround with grab bars	<input type="checkbox"/> N	<input type="checkbox"/> V	<input type="checkbox"/> Other_____	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Model	Component Description	Grab Bar Finishes			Colors/Finishes	
72281100	48" (121.9 cm) receptor with removable seat				<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
72284103	48" (121.9 cm) complete wall set with grab bars	<input type="checkbox"/> N	<input type="checkbox"/> V	<input type="checkbox"/> Other_____	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Technical Information

Door maximum width		Door maximum height	
44-1/8" (112.1 cm) at threshold		70-5/8" (179.4 cm)	
44-5/8" (113.3 cm) at top			
Removable seat	Height	Surface width	Surface length
	15-3/4" (40 cm)	11-3/4" (29.8 cm)	21-1/4" (54 cm)

Installation Notes

Install this product according to the installation guide.


Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown.

Receptor cannot be installed without the wall surround.

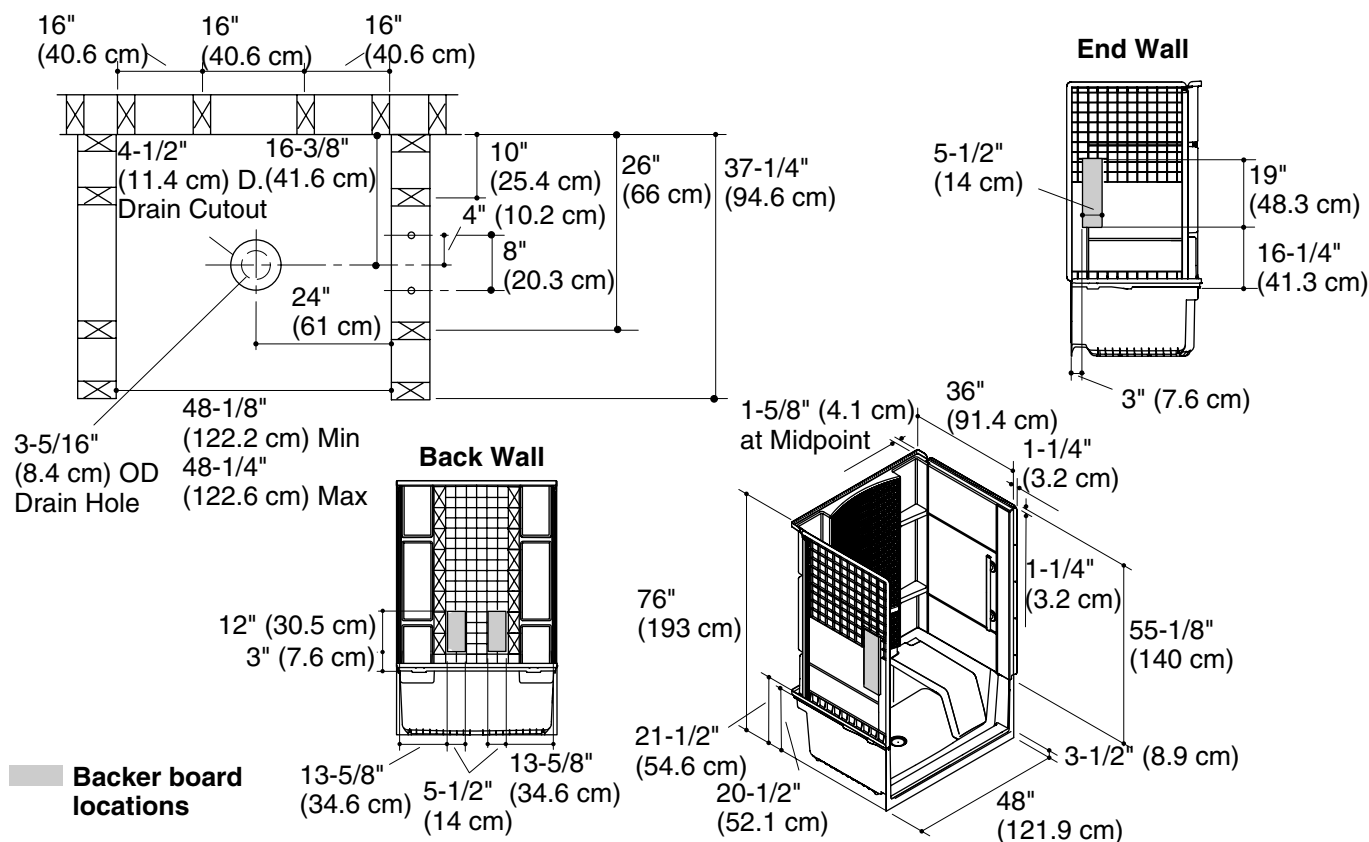

Product Diagram