

Location:



## Lavatory Faucet S-20 Series

### Specification Submittal



#### Feature Highlights

- Single lever faucet with red & blue indicators on handle
- Handle limit stops
- Standard aerator, 2.2 gpm flow rate (8.3 L/min)

- Quarter turn ceramic control components
- Supply has 6 inch 3/8 inch copper tubing, 4 inch (102mm) centers
- Metal construction, polished chrome finish








#### Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

#### Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

#### S-20 series handle options

Standard	LP	W	LCT
 	 	 	

#### Model Numbers

Append appropriate -suffix to model number.

- ☐ S-20 Faucet only with lift rod hole
- ☐ S-20-0 Faucet only with no lift rod hole
- ☐ S-20-1 Faucet with lift rod
- ☐ S-20-2 Faucet with pop-up drain & lift rod
- ☐ S-20-2-G Faucet with grid strainer drain

#### Alternative Finish Options

Append appropriate -suffix to model number.

- ☐ -STN Radiance® satin finish\*

\*Note (1) Handles with red/blue indicators are not available with decorative finishes.

#### Handle Options / Modifications

Append appropriate -suffix to model number.

- ☐ -LP Loop handle with metal finish
- ☐ -LCT Clear acrylic handle (only available with option BH, braided supply hose)
- ☐ -W Lever handle with metal finish, 6 inch (152mm) handle with red & blue indicators on handle (Chrome only)

#### Other Options

Append appropriate -suffix to model number.



- ☐ -LST 16 inch copper supply tubing
- ☐ -BH 20 inch braided supply hose
- ☐ -IPS 1/2 inch IPS connections
- ☐ -OFG Offset grid strainer (model S-20-2-G only)
- ☐ -.5 .5 gpm (1.9 L/min) flow restrictor, vandal resist.
- ☐ -1.0 1.0 gpm (3.8 L/min) flow restrictor, vandal resist.
- ☐ -1.5 1.5 gpm (5.7 L/min) flow restrictor, vandal resist.
- ☐ -VP Standard aerator is vandal resistant type
- ☐ -NA Non-aerated, laminar flow outlet

Print

Email



Reset Form

## Dimensions Symmetrix Lavatory Faucet, S-20-2

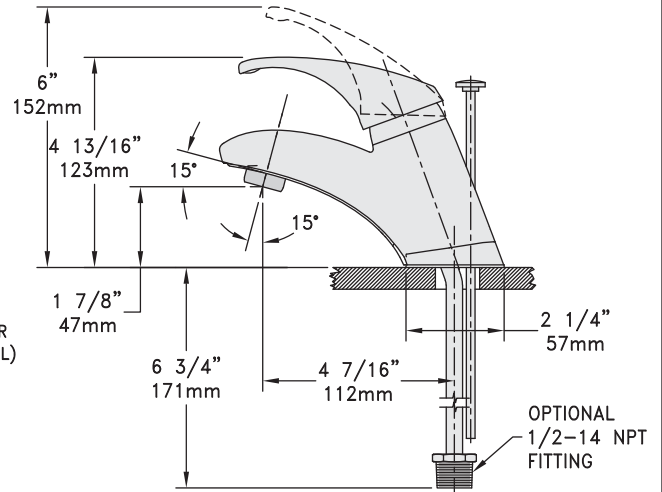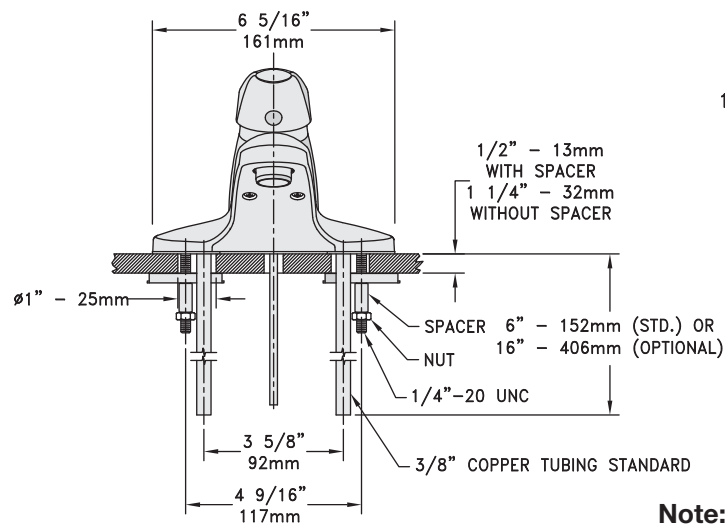


**Note:** Dimensions subject to change without notice.

## Dimensions Symmetrix Lavatory Faucet, S-20-2-BH (with optional braided supply hose)

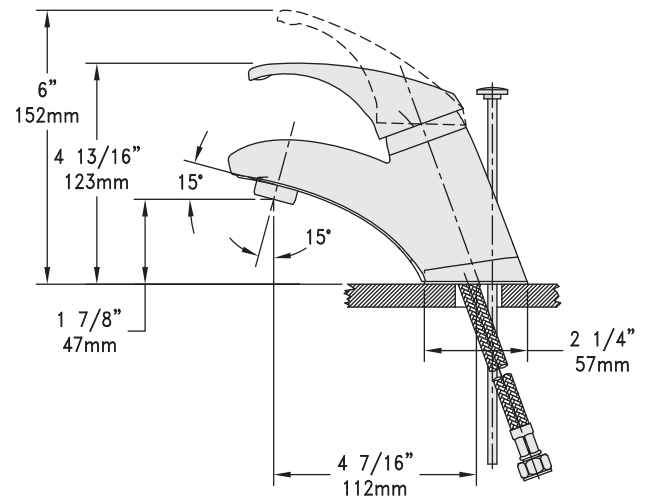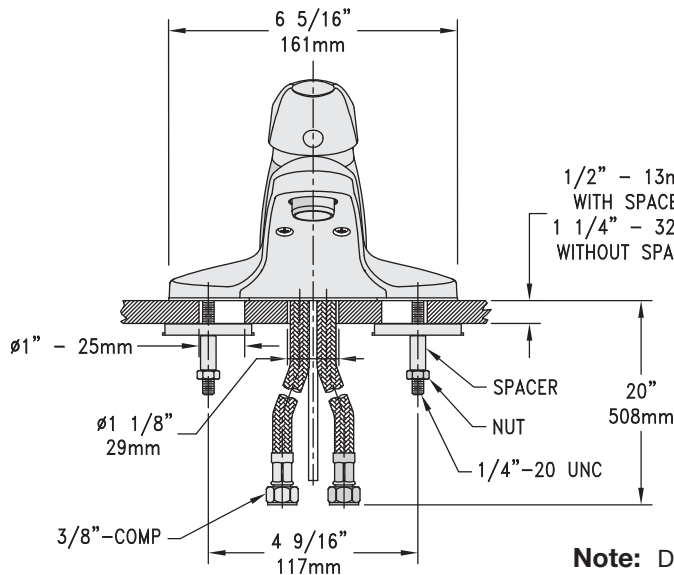


**Note:** Dimensions subject to change without notice.

## Dimensions Symmetrix Lavatory Faucet, S-20-2-W (S-20 Series with optional lever handle, option W)

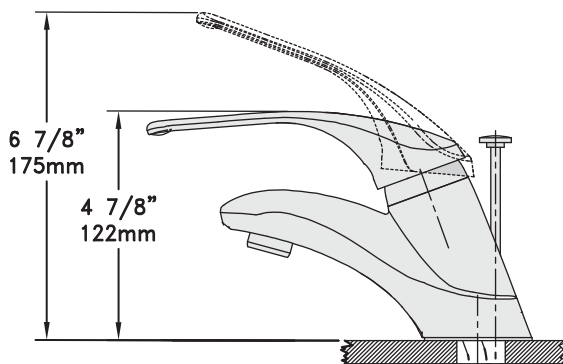

## Dimensions Symmetrix Lavatory Faucet, S-20-2-LCT (S-20 Series with acrylic handle, option LCT)

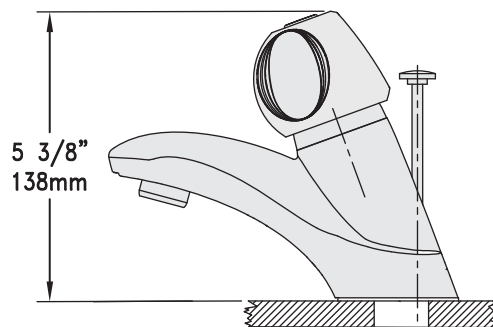

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184  
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 664-1300  
 Website: [www.symmons.com](http://www.symmons.com) ■ Email: [customerservice@symmons.com](mailto:customerservice@symmons.com)

©2008, 2009 Symmons Industries, Inc. Printed in U.S.A. ■ 051109

**SYMMONS**<sup>®</sup>  
 the smart choice™