


Location:



SYMMONS® Allura™

Shower System with Hand Shower 4705

Specification Submittal

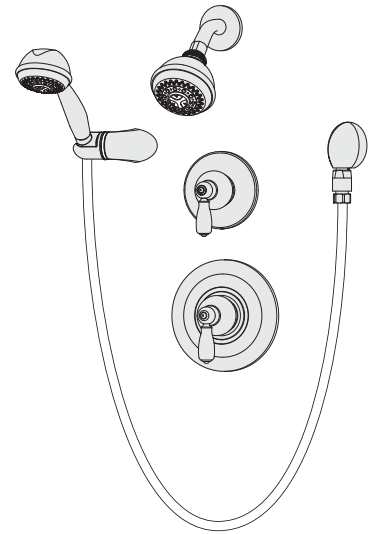

Feature Highlights

- Symmons shower system with lever handles.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Separate dual outlet lever diverter valve
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Shower head with mounting bracket
- Flow rate 2.5 gpm (9.5 L/min) for both shower head and hand shower
- Polished chrome finish

Model Numbers

- ☐ 4705Shower System with Symmons Temptrol® pressure balancing mixing valve p/n 4000-BODY and dual outlet diverter p/n 4-458E-BODY
- ☐ 4705-TRMTrim only, valve and diverter must be ordered separately
- ☐ 4000-BODY.....Symmons Temptrol® pressure balancing mixing valve without trim
- ☐ 4000-X-BODY....Symmons Temptrol® pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shut-off for service.
- ☐ 4-458E-BODY....Symmons dual outlet diverter valve without trim

Finish Options / Modifications

Append appropriate -suffix to model number.

- ☐ -STN Satin nickel
- Polished chrome (standard finish)

Options / Modifications

Append appropriate -suffix to model number.

- ☐ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- ☐ -X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 4705.)
- ☐ -2.0 2.0 (7.6 L/min) Flow rate restrictor
- ☐ -1.5 1.5 (5.7 L/min) Flow rate restrictor

Standards / Certifications


ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

Dimensions *Allura Shower and Hand Shower System, 4705*

Male 1/2" I.P.S. thread must be recessed 1/4" (6mm) from finished wall for proper installation of street ell.

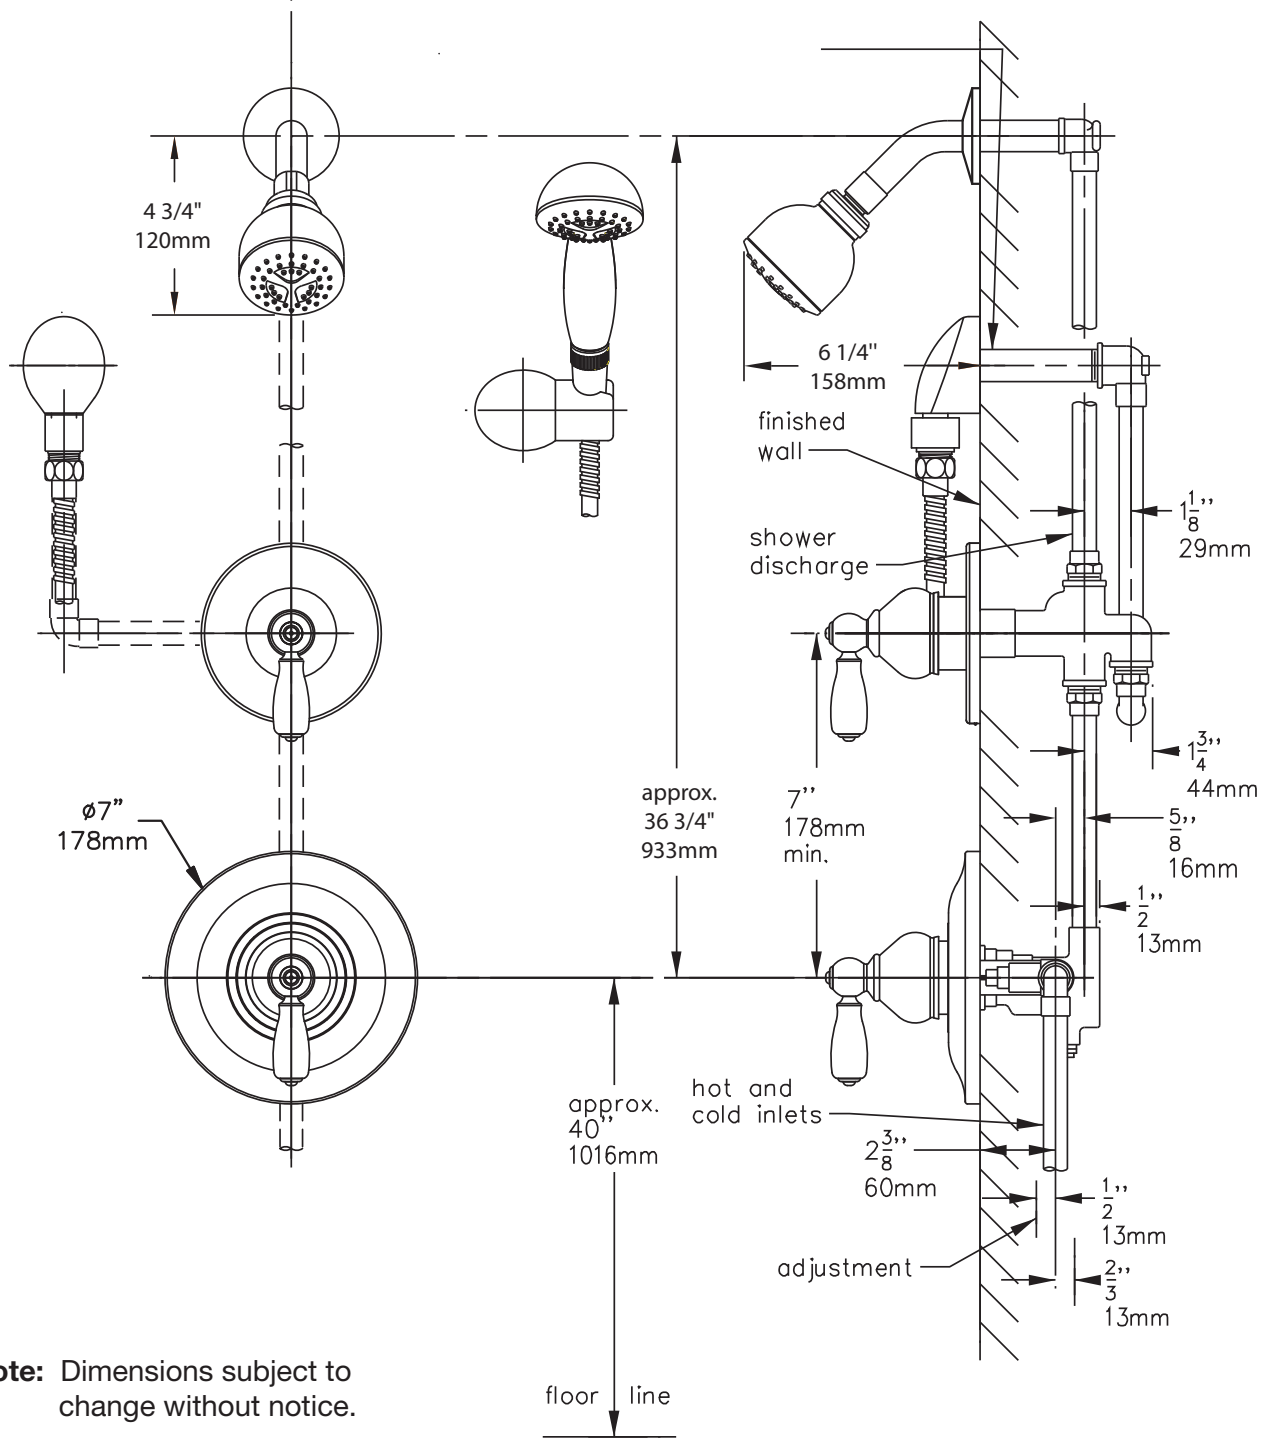


Note: Dimensions subject to change without notice.



Euro-Flo™ Hand Shower, H323-V

Specification Submittal



Feature Highlights

- Euro-Flo™ three function hand shower with full shower pulsating message and soft shower water saving spray head
- 5 foot flexible metal hose with in-line vacuum breaker, wall connection and flange
- 30 inch vertical bar with adjustable slide (chrome finish only).
- Polished chrome finish

Options


Append appropriate suffix to model number.

- BRS Radiance® polished brass finish (brass finish ships with 24 inch vertical bar)
- STN Radiance® satin finish (satin finish ships with 24 inch vertical bar)
- 48 48 inch vertical bar with adjustable slide (chrome finish only).
- QD Quick-disconnect for hand shower hose

Dimensions Euro-Flo™ Hand Shower, H323-V

Vertical Bar	
Length	Drawing Dimension
24"	25-1/2" (648 mm)
30"	30" (762 mm)
48"	48" (1219 mm)

Note: Dimensions subject to change without notice.

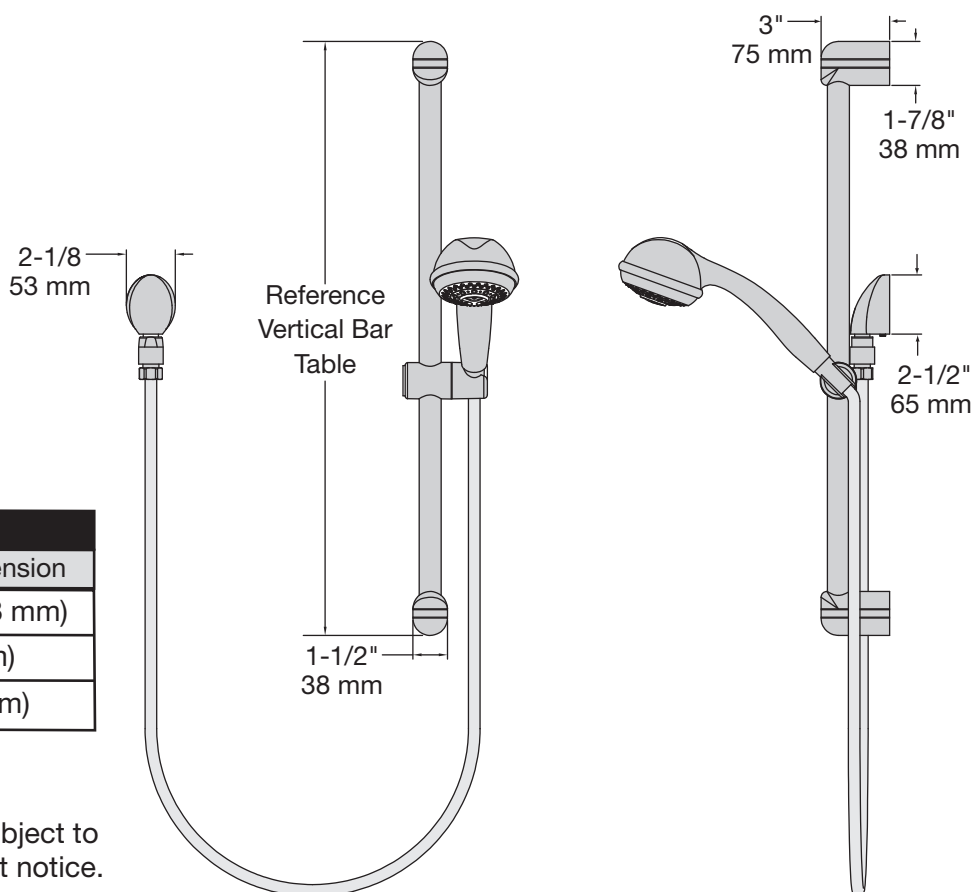

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849
 Website: www.symmons.com ■ Email: customerservice@symmons.com

©2003, 2008 Symmons Industries, Inc. Printed in U.S.A. ■ 042808

