

TORO®


SpecSheet

570 Series Adjustable Arc Nozzle

One nozzle fits all.

Flexibility. Precise spray patterns. One nozzle. Designing intricate landscapes just got easier with the 570 Adjustable Arc Nozzle from Toro. It's everything you need to turn the perfect blueprint into a beautiful landscape.

- The most flexible nozzle in the industry. One nozzle allows you to customize spray patterns to fit any landscape need.
- Clearly, the most feature-filled nozzle on the market today — at an unbeatable value.



	Residential
	Commercial
	Athletic



Toro 570 Adjustable Arc Nozzle 15' Radius


Features

- Radius adjustment screw provides 25% radius reduction and full off
- Adjustable arc from 0°–330°
- Factory preset at 180°, graphically identified
- Nozzles can be installed onto any 570 body, shrub adapter, riser or extender
- Left and right side of arc identified
- Wet or dry adjustment
- Vandal-resistant design to ensure arc setting

Specifications

- Radius range: 14'–17'
- Operating pressure range: 20–50 PSI
- GPM range: 0–5.5
- Maximum operating pressure: 75 PSI

*For more information,
contact your local
Toro distributor*




Arc Adjustment

- 1 Align left-side indicator with left watering border. Arc is preset at the factory to 180°.
- 2 Rotate outer ring: left to decrease, right to increase. Align right-side indicator to the desired spray coverage.

570 Adjustable Arc Nozzle Performance Chart

ARC	@ 20 PSI				@ 30 PSI				@ 40 PSI				@ 50 PSI			
	RAD	GPM	Prec. Rate* △ □		RAD	GPM	Prec. Rate* △ □		RAD	GPM	Prec. Rate* △ □		RAD	GPM	Prec. Rate* △ □	
▲ 45°	14'	0.65	2.95	2.55	15'	0.81	3.20	2.77	16'	0.95	3.30	2.86	17'	1.09	3.36	2.91
▲ 90°	14'	1.10	2.50	2.16	15'	1.36	2.69	2.33	16'	1.58	2.75	2.38	17'	1.77	2.72	2.36
▲ 135°	14'	1.52	2.29	1.99	15'	1.90	2.50	2.16	16'	2.27	2.62	2.27	17'	2.58	2.64	2.29
▲ 180°	14'	2.30	2.61	2.26	15'	2.65	2.62	2.27	16'	3.06	2.66	2.30	17'	3.43	2.64	2.29
▲ 225°	14'	2.49	2.26	1.96	15'	2.98	2.36	2.04	16'	3.45	2.40	2.08	17'	3.87	2.38	2.06
▲ 270°	14'	2.68	2.02	1.75	15'	3.30	2.17	1.88	16'	3.83	2.22	1.92	17'	4.30	2.20	1.91
▲ 315°	14'	2.87	1.86	1.61	15'	3.62	2.04	1.77	16'	4.21	2.08	1.81	17'	4.73	2.07	1.80

* △ Precipitation rates are for triangular spacing, shown in inches per hour, calculated at 50% of diameter.
□ Precipitation rates are for square spacing, shown in inches per hour, calculated at 50% of diameter.

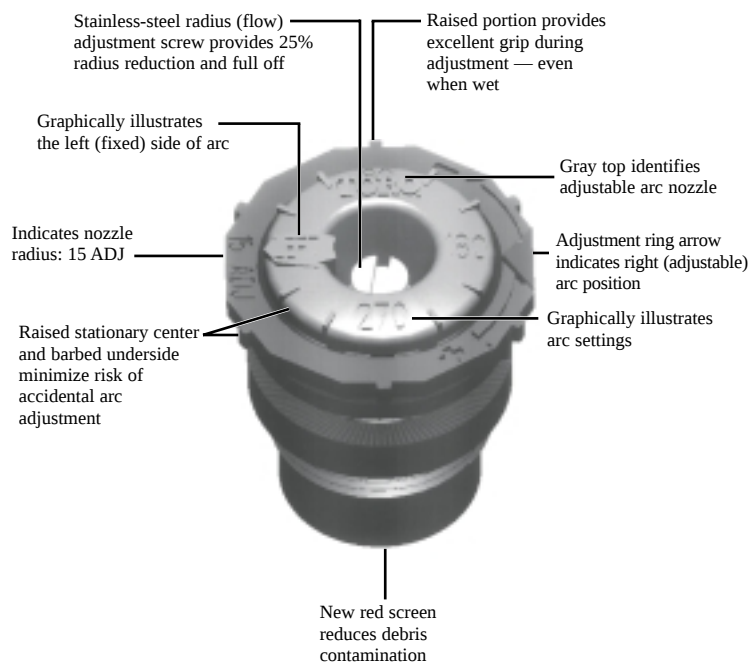

Specifying Information

---	--

Note: To specify a 570 Adjustable Arc Nozzle with a 570Z sprinkler body, attach the body specification before the nozzle specification.



The Toro Company • Irrigation Division • An ISO 9001-Certified Facility
• PO Box 489 • Riverside, CA • 92502 • (800) 664-4740 • www.toro.com

