




SUBMITTAL 4" HUB & SPIGOT CAST IRON SOIL PIPE & FITTINGS

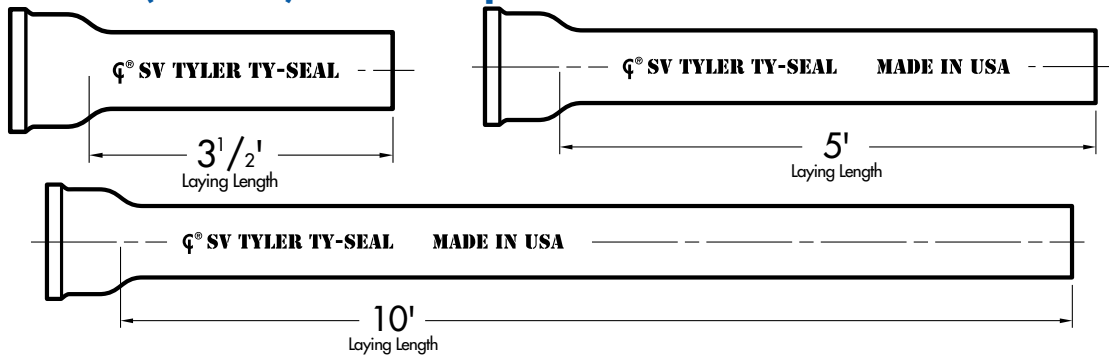


DOUBLE HUB, 30" LENGTHS

Size	L	Wt.
2"	25	12
3"	24 1/2	17
4"	24	26

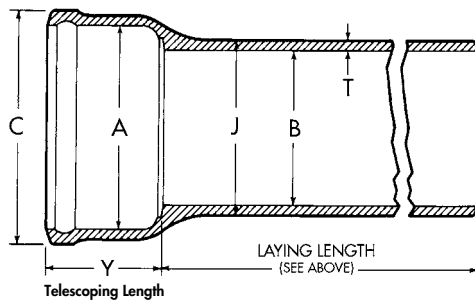


SV PIPE & FITTINGS


Telescoping Length	Hub I.D.	Hub O.D.	Barrel O.D.	Barrel I.D.	Nominal Thickness	Minimum Thickness
Size	Y	A	C	J	B	T
2"	2.50	2.94	3.62	2.30	1.96	0.17
3"	2.75	3.94	4.68	3.30	2.96	0.17
4"	3.00	4.94	5.68	4.30	3.94	0.18
5"	3.00	5.94	6.68	5.30	4.94	0.18
6"	3.00	6.94	7.68	6.30	5.94	0.18
8"	3.50	9.25	10.13	8.38	7.94	0.23
10"	3.50	11.38	12.44	10.50	9.94	0.28
12"	4.25	13.50	14.56	12.50	11.94	0.28
15"	4.25	16.95	18.11	15.88	15.16	0.36




"P" Trap




Long Sweep Bend




San Tee




Tapped San Cross



San Cross (No Baffles)




Quarter Bend w/ Low Heel Inlet



Wye



Reducer



Double Wye

SV CLASS SINGLE HUB PIPE

3-1/2 Ft.		5 Ft.		10 Ft.	
Size	Wt.	Size	Wt.	Size	Wt.
2	15	2	20	2	38
3	23	3	31	3	52
4	30	4	42	4	76
5	39	5	55	5	97
6	45	6	62	6	128
8	72	8	100	8	190
10	106	10	150	10	270
12	135	12	190	12	325
15	184	15	260	15	497


SPECIFICATIONS

All 2-inch through 15-inch hub and spigot cast iron soil pipe and fittings shall conform to ASTM A 74; joints shall be made either by caulked lead and oakum or by compression gaskets such as TY-SEAL which conform to ASTM C 564.


STANDARDS

ASTM A 74: Cast Iron Soil Pipe and Fittings.


ASTM C 564: Rubber Gaskets for Cast Iron Soil Pipe and Fittings



Push-On closet Flange



Combination



Sixteenth Bend