



VANDAL-RESISTANT EASY ACCESS BACKFLOW ENCLOSURE


- Marine grade aluminum alloy construction provides lasting durability and strength, with light weight for ease of handling
- 100% stainless steel hardware assures long-term, rust proof durability and additional strength
- Full release locking mechanism requires no tools and provides easy access for service and repair
- Flush-mounted locking mechanism and solid sheet construction ensures maximum security
- Chameleon effect of the natural finish provides an unobtrusive quality
- Pre-punched viewing ports provide for easy inspection without removing the cover
- Expansion module allows for length adjustments to meet field requirements
- Five year limited warranty

Low Profile Enclosure

	"A" Length	Height	Width
SBBC-15AL	15"	29.5"	16.25"
SBBC-30AL	30"	29.5"	16.25"
SBBC-45AL	45"	29.5"	16.25"
SBBC-60AL	60"	29.5"	16.25"

Note: For inside dimensions, see Backflow Cover Sizing Chart on page 18.

- Marine Grade Aluminum
- Stainless Steel Hardware
- Weather Resistant
- Patented Locking System Accepts Padlock
- Removable Without Tools

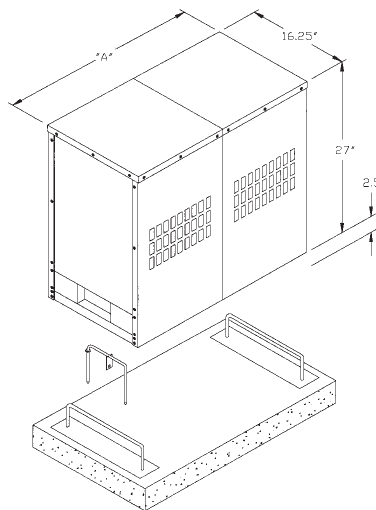


High Profile Two Piece Enclosure

	"A" Length	Height	Width
SBBC-40AL	40"	39"	24"
SBBC-60AL	60"	39"	24"
SBBC-75AL	75"	39"	24"
SBBC-90AL	90"	39"	24"

Note: For inside dimensions, see Backflow Cover Sizing Chart on page 18.

- Marine Grade Aluminum
- Stainless Steel Hardware
- Weather Resistant
- Patented Locking System Accepts Padlock
- Removable Without Tools

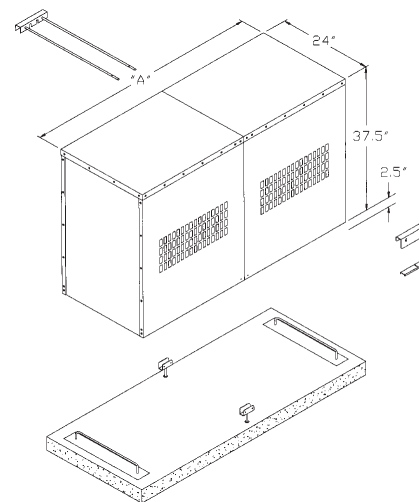



ALL WEATHER INSULATED BACKFLOW ENCLOSURE

- Marine grade aluminum alloy construction provides lasting durability and strength, with light weight for ease of handling
- 100% stainless steel hardware assures long-term, rust proof durability and additional strength
- Full release locking mechanism requires no tools and provides easy access for service and repair
- Flush-mounted locking mechanism and solid sheet construction ensures maximum security
- Chameleon effect of the natural finish provides an unobtrusive quality
- R-6 insulation on the top and sides helps protect freezing*
- Flexible rubber skirt provides protection from wind but allows drainage
- Five year limited warranty


*To properly protect from freezing, the use of pipe heating cable is recommended

Low Profile Insulated Enclosure

	"A" Length	Height	Width
SBBC-15ALI	15"	29.5"	16.25"
SBBC-30ALI	30"	29.5"	16.25"
SBBC-45ALI	45"	29.5"	16.25"
SBBC-60ALI	60"	29.5"	16.25"

Note: For inside dimensions, see Backflow Cover Sizing Chart on page 18.

- Marine Grade Aluminum
- Stainless Steel Hardware
- Weather Resistant
- Patented Locking System Accepts Padlock

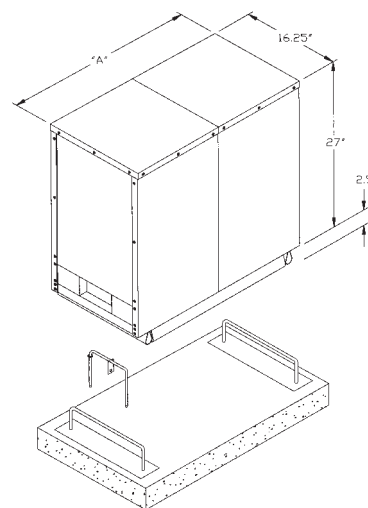


High Profile Insulated Two Piece Enclosure

	"A" Length	Height	Width
SBBC-40ALI	40"	39"	24"
SBBC-60ALI	60"	39"	24"
SBBC-75ALI	75"	39"	24"
SBBC-90ALI	90"	39"	24"

Note: For inside dimensions, see Backflow Cover Sizing Chart on page 18.

- Marine Grade Aluminum
- Stainless Steel Hardware
- Weather Resistant
- Patented Locking System Accepts Padlock

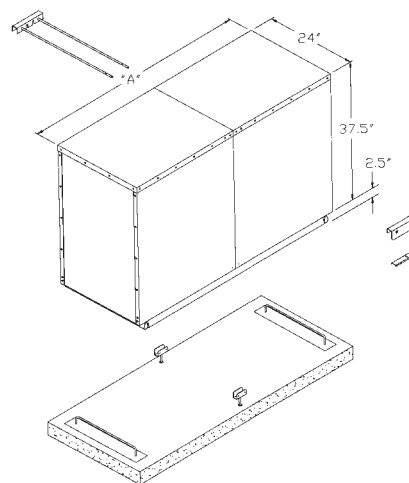




VANDAL-RESISTANT EASY ACCESS PUMP & POWER CONDITIONERS ENCLOSURE

- Marine grade aluminum alloy construction provides lasting durability and strength, with light weight for ease of handling
- 100% stainless steel hardware assures long-term, rust proof durability and additional strength
- Full release locking mechanism requires no tools and provides easy access for service and repair
- Flush-mounted locking mechanism and solid sheet construction ensures maximum security
- Chameleon effect of the natural finish provides an unobtrusive quality
- Five year limited warranty

Power Conditioner Enclosure

	"A" Length	Height	Width
SBBC-40ALHPPC	40"	39"	24"


- Marine Grade Aluminum
- Stainless Steel Hardware
- Weather Resistant
- Patented Locking System Accepts Padlock
- Removable Without Tools

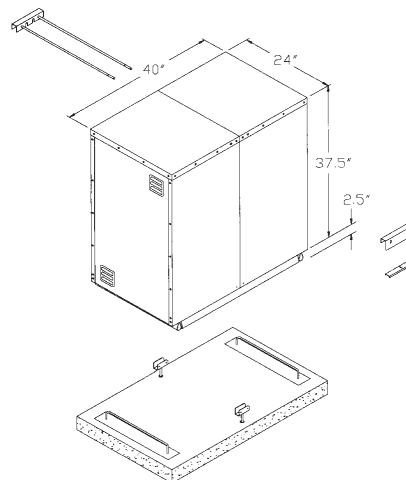

Pump Enclosure

	"A" Length	Height	Width
PE-40AL	40"	39"	38"
PE-60AL	60"	39"	38"

- Marine Grade Aluminum
- Stainless Steel Hardware
- Weather Resistant
- Patented Locking System Accepts Padlock
- Removable Without Tools

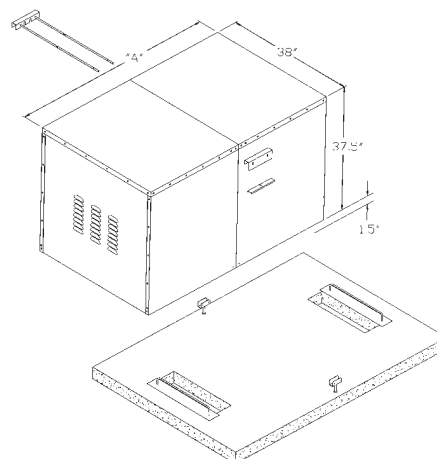



SMOOTH TOUCH™ VANDAL RESISTANT BACKFLOW ENCLOSURE


- Tube and wire construction provides a smooth surface to protect against handling injury
- Architectural lines of the enclosure blend beautifully into the landscape environment
- 100% stainless steel construction assures long-term, rustproof durability and additional strength
- Full release locking mechanism requires no tools and provides easy access for service and repair
- Ten year limited warranty

Low Profile Smooth Touch™ Enclosure

	"A" Length	Height	Width
SBBC-30SS	31.5"	29.5"	17.75"
SBBC-45SS	46.5"	29.5"	17.75"

Note: For inside dimensions, see Backflow Cover Sizing Chart on page 18.

- 100% Stainless Steel
- Stainless Steel Hardware
- Weather Resistant
- Patented Locking System Accepts Padlock
- Removable Without Tools
- Minimizes Surface Area for Graffiti

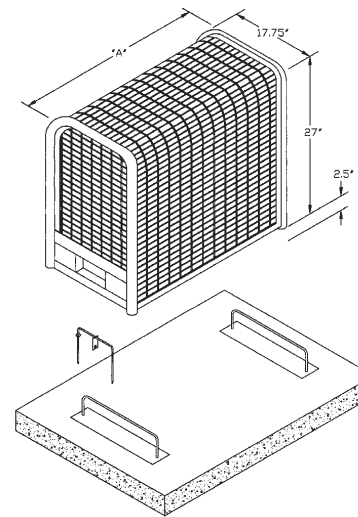


High Profile Smooth Touch™ Enclosure

	"A" Length	Height	Width
SBBC-20SS	20"	46.5"	17.75"
SBBC-40SS	40"	39"	25.5"
SBBC-75SS	76.5"	39"	25.5"

Note: For inside dimensions, see Backflow Cover Sizing Chart on page 18.

- 100% Stainless Steel
- Stainless Steel Hardware
- Weather Resistant
- Patented Locking System Accepts Padlock
- Removable Without Tools
- Minimizes Surface Area for Graffiti

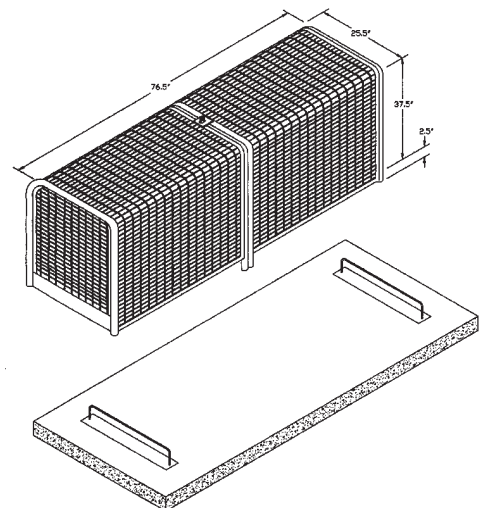

Febco

Model	Size	Device Length	Installed Height	Nipple Length	Nipple Total	Elbow Total	Total Inches	Aluminum Model No.	Smooth Touch Model No.	Expanded Metal Model No.
825YA 880	3/4"	10.000	18.000	n/a	n/a	n/a	10.000	SBBC-15AL	SBBC-30SS & CR	BC-30CR
	1"	10.250	18.375	n/a	n/a	n/a	10.250	SBBC-15AL	SBBC-30SS & CR	BC-30CR
	1 1/2"	14.250	20.000	n/a	n/a	n/a	14.250	SBBC-30AL	SBBC-30SS & CR	BC-30CR
	2"	14.875	21.000	n/a	n/a	n/a	14.875	SBBC-30AL	SBBC-30SS & CR	BC-30CR
825YD	2 1/2"	37.188	28.000	n/a	n/a	17.000	54.188	SBBC-60ALHP	SBBC-75SS & CR	BC-75CR
	3"	41.687	29.750	n/a	n/a	18.500	60.187	SBBC-75ALHP	SBBC-75SS & CR	BC-75CR
	4"	50.438	33.875	n/a	n/a	22.000	72.438	SBBC-75ALHP	SBBC-75SS & CR	BC-75CR
	6"	59.687	38.750	n/a	n/a	27.000	86.687	SBBC-90ALHP	N/A	N/A
860U	2 1/2"	40.750	28.625	n/a	n/a	17.000	57.750	SBBC-60ALHP	SBBC-75SS & CR	BC-75CR
	3"	41.875	28.625	n/a	n/a	18.500	60.375	SBBC-75ALHP	SBBC-75SS & CR	BC-75CR
	4"	46.250	30.000	n/a	n/a	22.000	68.250	SBBC-75ALHP	SBBC-75SS & CR	BC-75CR
	6"	58.000	33.700	n/a	n/a	27.000	85.000	SBBC-90ALHP	N/A	N/A
	8"	65.000	47.750	n/a	n/a	32.500	97.500	CALL FACTORY	N/A	N/A
880	2 1/2"	25.750	28.625	n/a	n/a	n/a	25.750	SBBC-40ALHP	SBBC-40SS & CR	BC-75CR
	3"	25.750	28.625	n/a	n/a	n/a	25.750	SBBC-40ALHP	SBBC-40SS & CR	BC-75CR
	4"	27.875	30.000	n/a	n/a	n/a	27.875	SBBC-40ALHP	SBBC-40SS & CR	BC-75CR
	6"	32.188	33.700	n/a	n/a	n/a	32.188	SBBC-40WALHP	N/A	BC-75CR

Watts

Model	Size	Device Length	Installed Height	Nipple Length	Nipple Total	Elbow Total	Total Inches	Aluminum Model No.	Smooth Touch Model No.	Expanded Metal Model No.
009QT	3/4"	14.750	17.500	3"	5.000	4.000	23.750	SBBC-30AL	SBBC-30SS & CR	BC-30CR
	1"	16.750	17.500	3"	5.000	5.000	26.750	SBBC-45AL	SBBC-45SS & CR	BC-45CR
	1 1/4"	21.125	19.750	3"	5.000	5.500	31.625	SBBC-45AL	SBBC-45SS & CR	BC-45CR
	1 1/2"	22.000	19.750	3"	5.000	6.000	33.000	SBBC-45AL	SBBC-45SS & CR	BC-45CR
	2"	23.750	19.750	3"	5.000	7.500	36.250	SBBC-45AL	SBBC-45SS & CR	BC-45CR
	2 1/2"	33.250	27.675	n/a	n/a	17.000	50.250	SBBC-60ALHP	SBBC-75SS & CR	BC-75CR
	3"	34.250	29.050	n/a	n/a	18.500	52.750	SBBC-60ALHP	SBBC-75SS & CR	BC-75CR
U009AQT	3/4"	16.250	17.500	n/a	n/a	n/a	16.250	SBBC-30AL	SBBC-30SS & CR	BC-30CR
	1"	16.250	17.500	n/a	n/a	n/a	16.250	SBBC-30AL	SBBC-30SS & CR	BC-30CR
	1 1/2"	19.875	19.750	n/a	n/a	n/a	19.875	SBBC-30AL	SBBC-30SS & CR	BC-30CR
	2"	19.875	19.750	n/a	n/a	n/a	19.875	SBBC-30AL	SBBC-30SS & CR	BC-30CR
909	2 1/2"	41.250	28.250	n/a	n/a	17.000	58.250	SBBC-75ALHP	SBBC-75SS & CR	BC-75CR
	3"	42.250	28.250	n/a	n/a	18.500	60.750	SBBC-75ALHP	SBBC-75SS & CR	BC-75CR
	4"	55.125	32.000	n/a	n/a	22.000	77.125	SBBC-90ALHP	N/A	N/A
	6"	65.500	34.000	n/a	n/a	27.000	92.500	CALL FACTORY	N/A	N/A

Wilkins

Model	Size	Device Length	Installed Height	Nipple Length	Nipple Total	Elbow Total	Total Inches	Aluminum Model No.	Smooth Touch Model No.	Expanded Metal Model No.
575	3/4"	13.750	21.250	3"	5.000	4.000	22.750	SBBC-30AL	SBBC-30SS & CR	BC-30CR
	1"	14.750	21.250	3"	5.000	5.000	24.750	SBBC-30AL	SBBC-30SS & CR	BC-30CR
	1 1/4"	19.250	21.700	3"	5.000	5.500	29.750	SBBC-45AL	SBBC-45SS & CR	BC-45CR
	1 1/2"	19.750	21.700	3"	5.000	6.000	30.750	SBBC-45AL	SBBC-45SS & CR	BC-45CR
	2"	21.000	21.700	3"	5.000	7.500	33.500	SBBC-45AL	SBBC-45SS & CR	BC-45CR
	2 1/2"	35.000	33.750	n/a	n/a	17.000	52.000	SBBC-60ALHP	SBBC-75SS & CR	BC-75CR
	3"	36.000	34.750	n/a	n/a	18.500	54.500	SBBC-60ALHP	SBBC-75SS & CR	BC-75CR
	4"	46.000	37.000	n/a	n/a	22.000	68.000	SBBC-75ALHP	SBBC-75SS & CR	BC-75CR
	6"	57.000	49.000	n/a	n/a	27.000	84.000	SBBC-90ALHP	N/A	N/A
975	3/4"	11.875	20.250	3"	5.000	4.000	20.875	SBBC-30AL	SBBC-30SS & CR	BC-30CR
	1"	13.000	20.250	3"	5.000	5.000	23.000	SBBC-30AL	SBBC-30SS & CR	BC-30CR
	1 1/4"	17.000	23.625	3"	5.000	5.500	27.500	SBBC-45AL	SBBC-45SS & CR	BC-45CR
	1 1/2"	17.500	23.625	3"	5.000	6.000	28.500	SBBC-45AL	SBBC-45SS & CR	BC-45CR
	2"	18.625	23.625	3"	5.000	7.500	31.125	SBBC-45AL	SBBC-45SS & CR	BC-45CR
	2 1/2"	37.250	24.750	n/a	n/a	17.000	54.250	SBBC-60ALHP	SBBC-75SS & CR	BC-75CR
	3"	38.250	26.000	n/a	n/a	18.500	56.750	SBBC-60ALHP	SBBC-75SS & CR	BC-75CR
	4"	50.250	29.000	n/a	n/a	22.000	72.250	SBBC-90ALHP	SBBC-75SS & CR	BC-75CR
	6"	62.250	34.500	n/a	n/a	27.000	89.250	CALL FACTORY	N/A	N/A

Maximum Inside Clearance For Strong Box Covers

SBBC-30AL*	25.0"	SBBC-40ALHP	34.0"	SBBC-20SS	17.0"	SBBC-30CR*	25.0"	BC-30CR*	27.0"
SBBC-45AL*	39.5"	SBBC-60ALHP	54.0"	SBBC-30SS*	25.0"	SBBC-40CR	35.5"	BC-45CR*	42.0"
SBBC-60AL*	54.0"	SBBC-75ALHP	69.0"	SBBC-40SS	35.5"	SBBC-45CR*	39.5"	BC-75CR	72.0"
		SBBC-90ALHP	84.0"	SBBC-45SS*	39.5"	SBBC-75CR	69.0"		
				SBBC-75SS	69.0"				

*Note: Allow clearance for enclosure pivot.